Smart Cyber Infrastructure for Big Data Processing

Cees de Laat

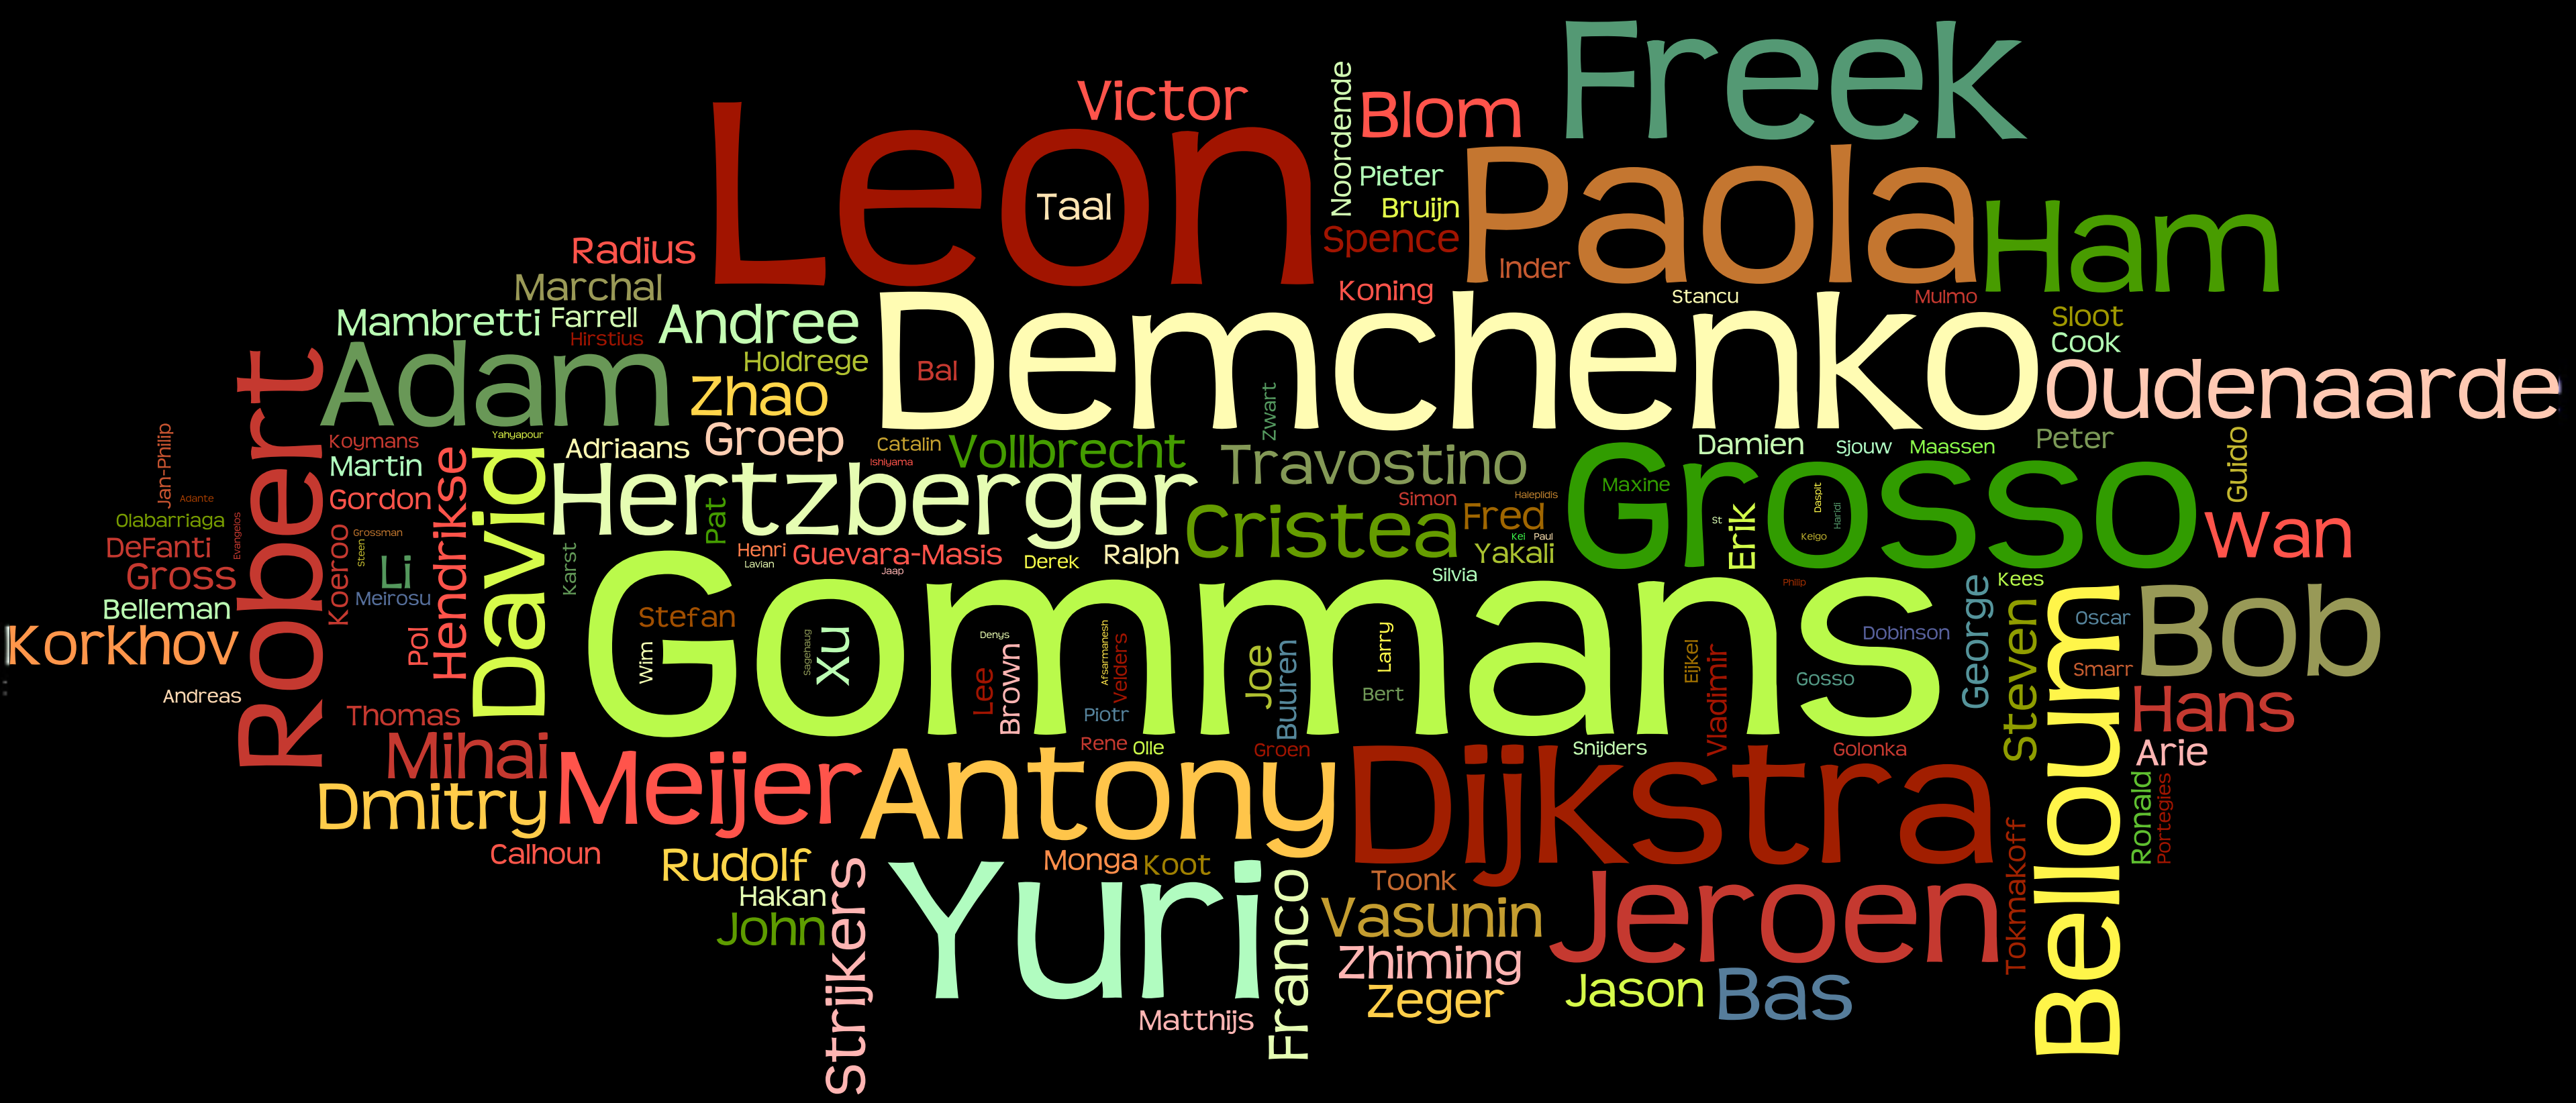

COMMIT/

Science Faculty @ UvA

Informatics Institute

- AMLAB: Machine Learning (Prof. dr. M. Welling)
- FCN: Federated Collaborative Networks (Prof. dr. H. Afsarmanesh)
- ILPS: Information and Language Processing Systems (Prof. dr. M. de Rijke)
- ISIS: Intelligent Sensory Information Systems (Prof. dr. ir. A.W.M. Smeulders)
- CSL: Computational Science Laboratory (Prof. dr. P.M.A. Sloot)
- SNE: System and Network Engineering (Prof. dr. ir. C.T.A.M. de Laat)
- TCS: Theory of Computer Science (Prof. dr. J.A. Bergstra)

SNE - Staffing

Group leader: ***prof.dr.ir. C. de Laat***

Deputy group leaders: dr. Paola Grosso, dr. Andy Pimentel

- 1 full prof (CdL)
- 2 associate professors
- 4 assistant professors
- 2 part time professors
- 2 endowed professors
- *2 senior researchers*
- ~12 postdoc's
- *About 15 phd students*
- ~10 guests

- *Yearly turnover ~ 3,5 MEuro*

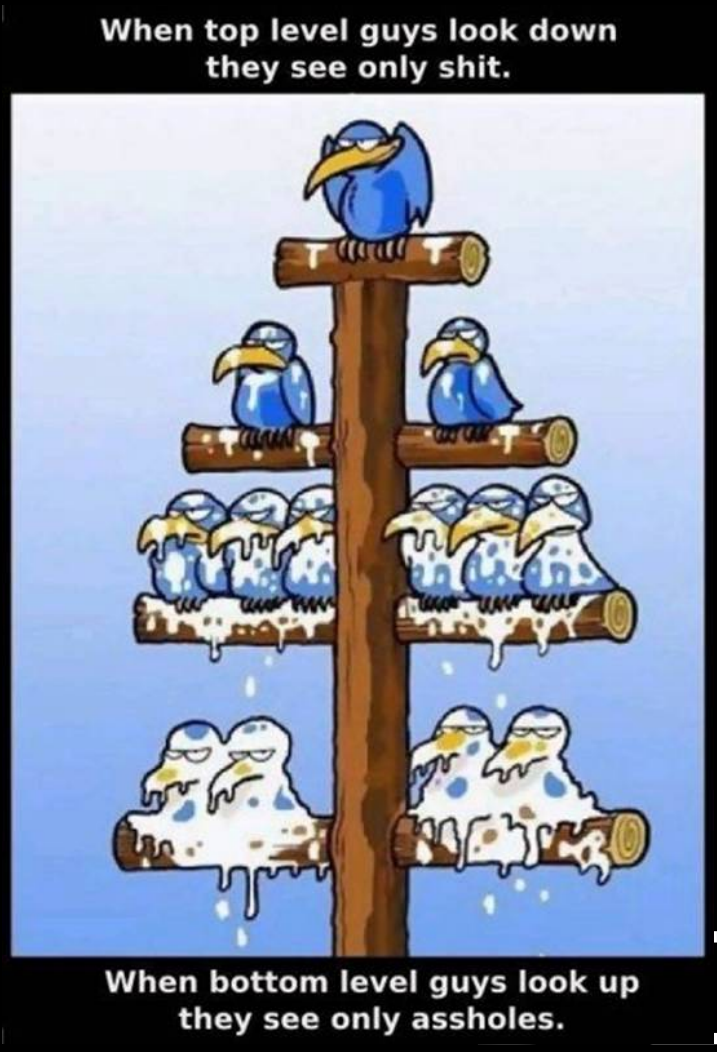

From King's Dutch Academy of Sciences

The Dutch Research Agenda

"Information technology (IT) now permeates all aspects of public, commercial, social, and personal life. bank cards, satnav, and weather radar... IT has become completely indispensable."

"But to guarantee the reliability and quality of constantly bigger and more complicated IT, we will need to find answers to some fundamental questions!"

https://www.knaw.nl/nl/actueel/publicaties/the-dutch-research-agenda/@@download/pdf_file/20111029.pdf

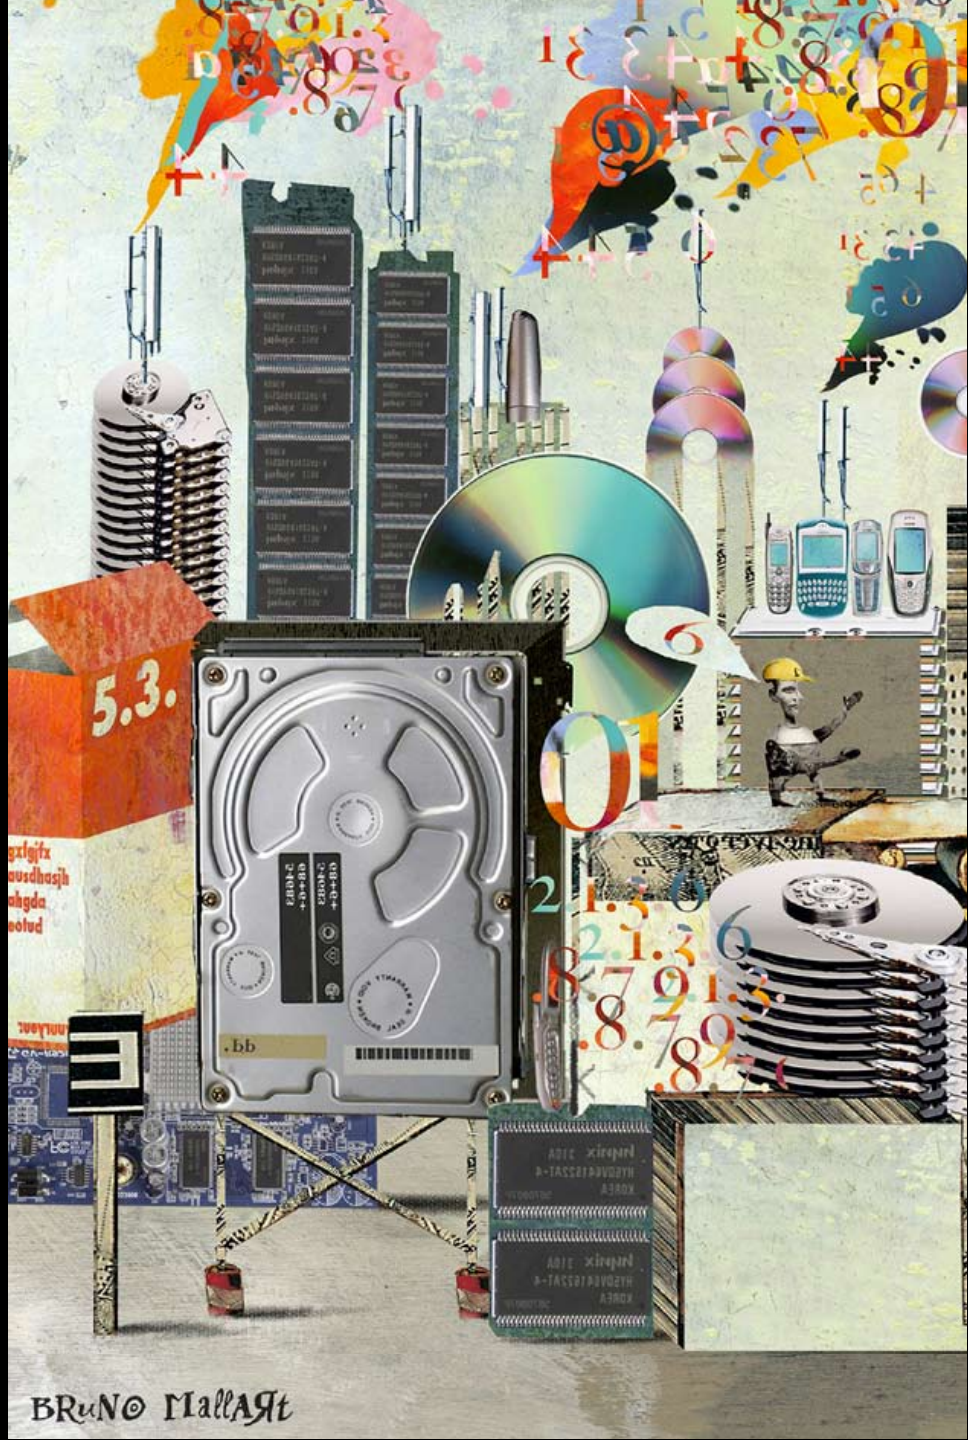

Reduction of Complexity by Integration

By combining services such as telephony, television, data, and computing capacity within a single network, we can cut down on complexity, energy consumption and maintenance.

- How can we describe and analyze complex information systems effectively?
- How can we specify and measure the quality and reliability of a system?
- How can we combine various different systems?
- How can we design systems in which separate processors can co-operate efficiently via mutual network connections within a much larger whole?
- Can we design information systems that can diagnose their own malfunctions and perhaps even repair them?
- How can we specify, predict, and measure system performance as effectively as possible?

http://www.knaw.nl/Content/Internet_KNAW/publicaties/pdf/20111029.pdf

Fading Trust in Internet

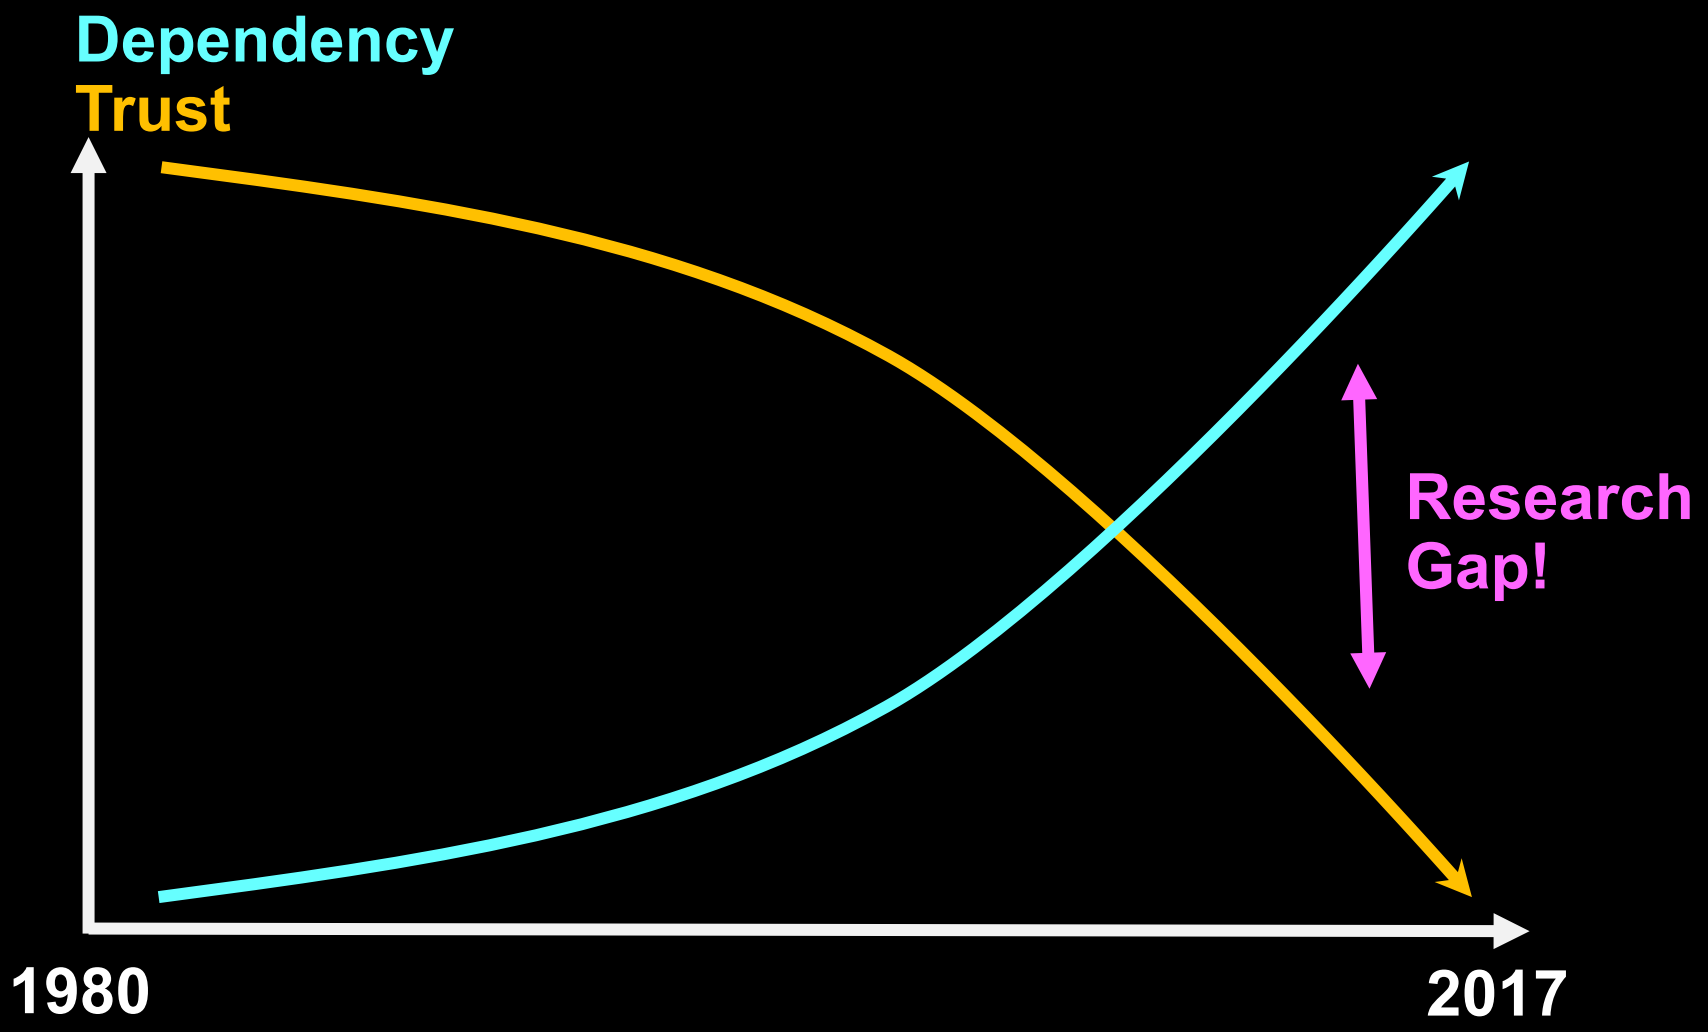

Mission

Can we create smart and safe data processing systems that can be tailored to diverse application needs?

- *Capacity*
  - *Bandwidth on demand, QoS, architectures, photonics, performance*
- *Capability*
  - *Programmability, virtualization, complexity, semantics, workflows*
- *Security*
  - *Anonymity, integrity of data in distributed data processing*
- *Sustainability*
  - *Greening infrastructure, awareness*
- *Resilience*
  - *Systems under attack, failures, disasters*

Mission

Can we create smart and safe data processing systems that can be tailored to diverse application needs?

- ***Capacity***
  - ***Bandwidth on demand, QoS, architectures, photonics, performance***
- *Capability*
  - *Programmability, virtualization, complexity, semantics, workflows*
- *Security*
  - *Anonymity, integrity of data in distributed data processing*
- *Sustainability*
  - *Greening infrastructure, awareness*
- *Resilience*
  - *Systems under attack, failures, disasters*

ATLAS detector @ CERN Geneve

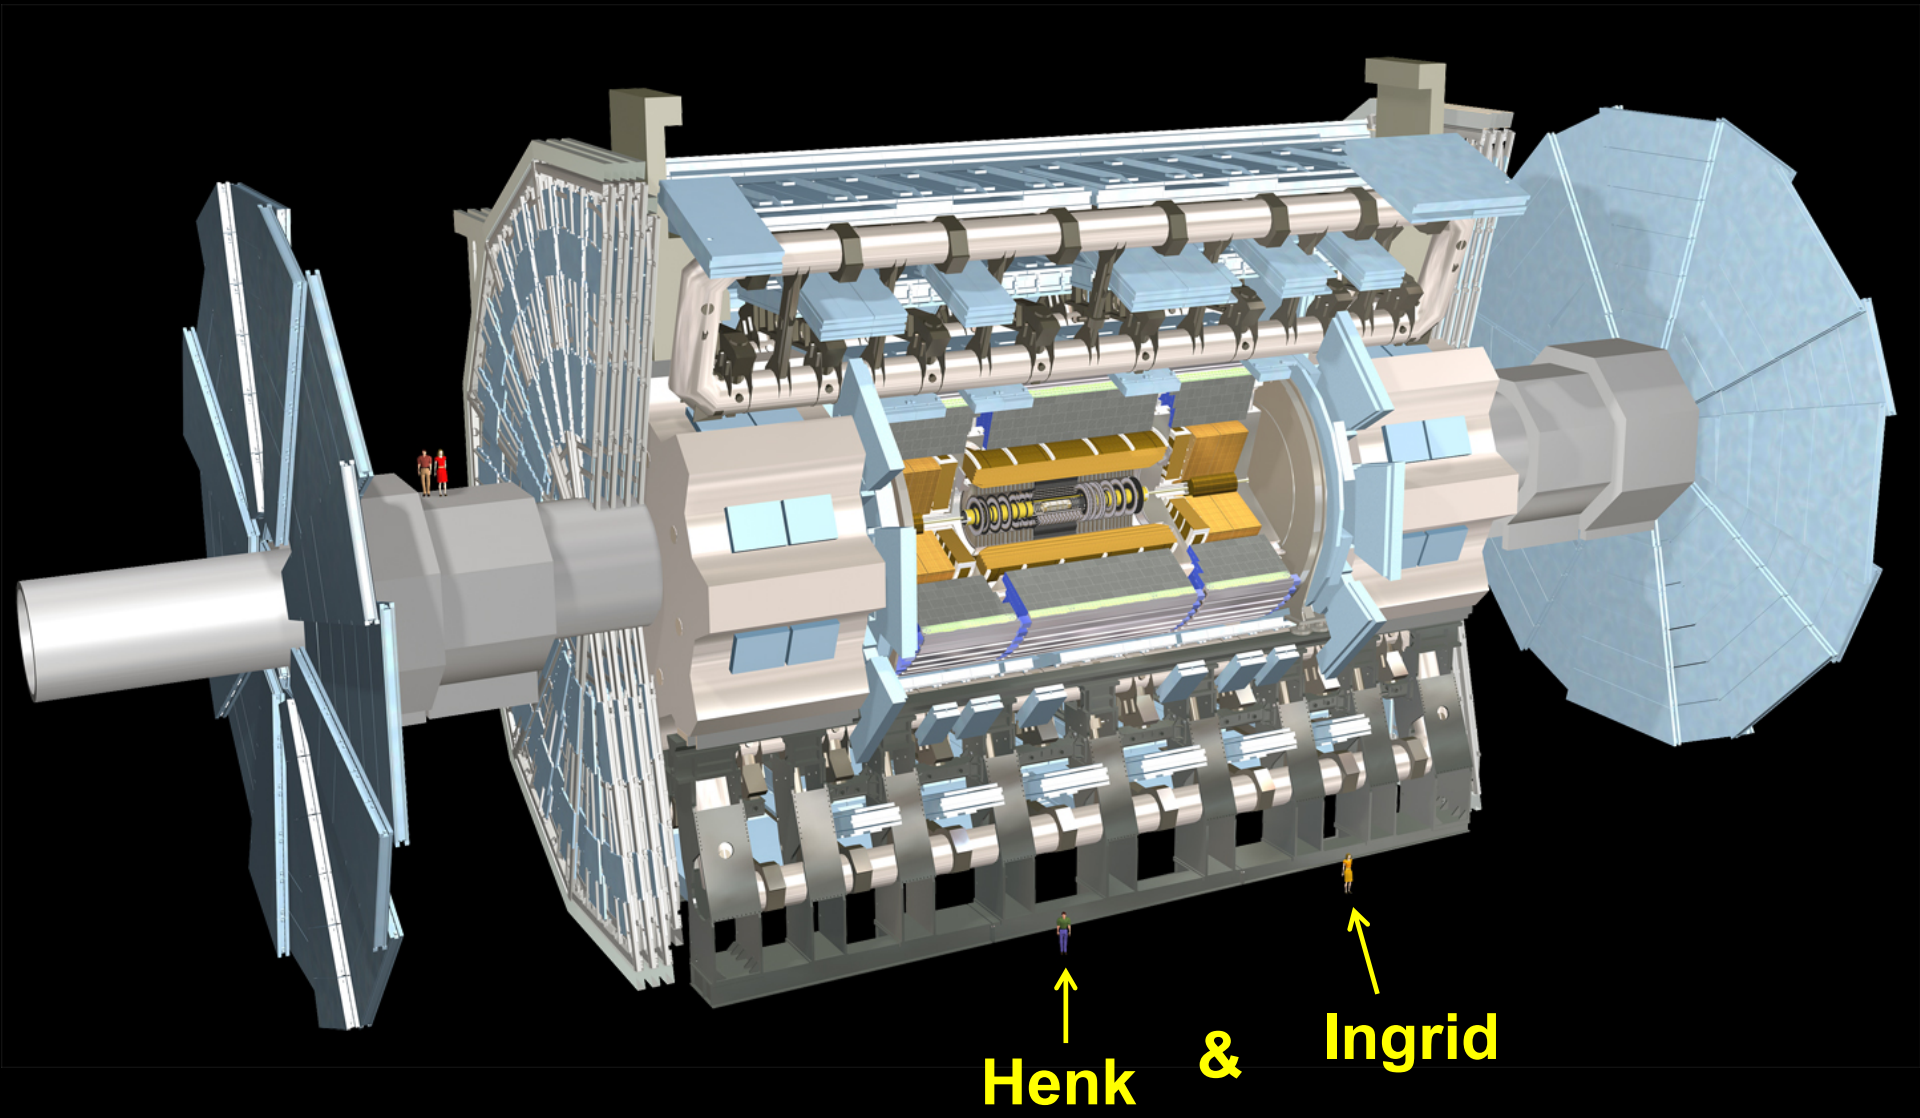

What Happens in an **Internet Minute?**

And **Future Growth** is **Staggering**

Today, the number of networked devices = the global population

By **2015**, the number of networked devices = 2x the global population

In **2015**, it would take you **5 years**

to view all video crossing IP networks each **second**

intel

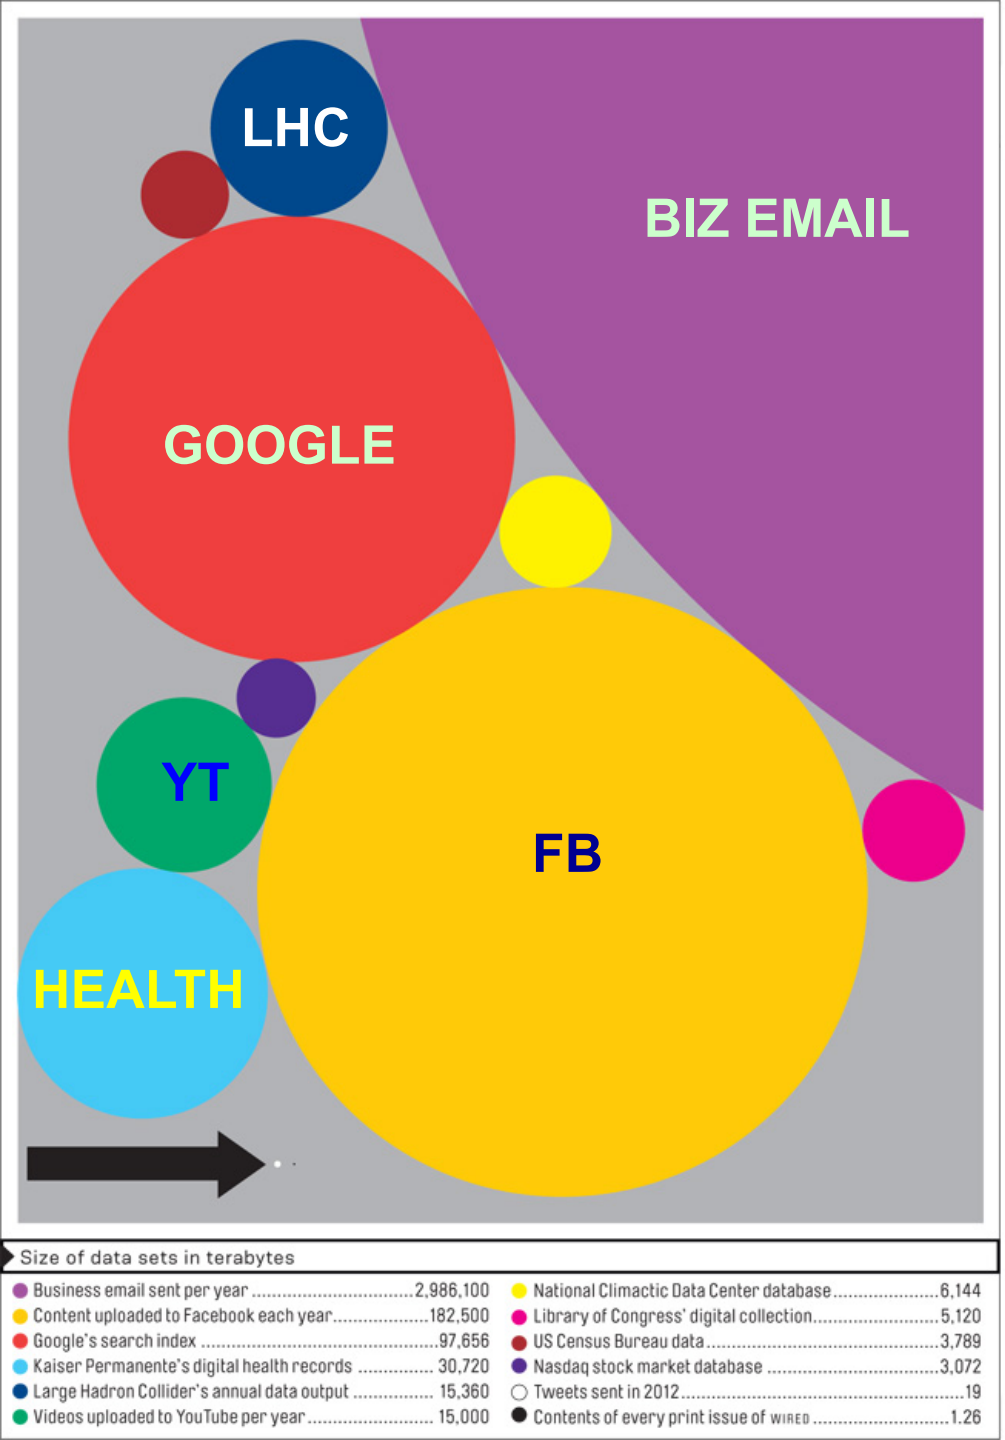

There
is
always
a
bigger
fish

GPU cards are distruptive!

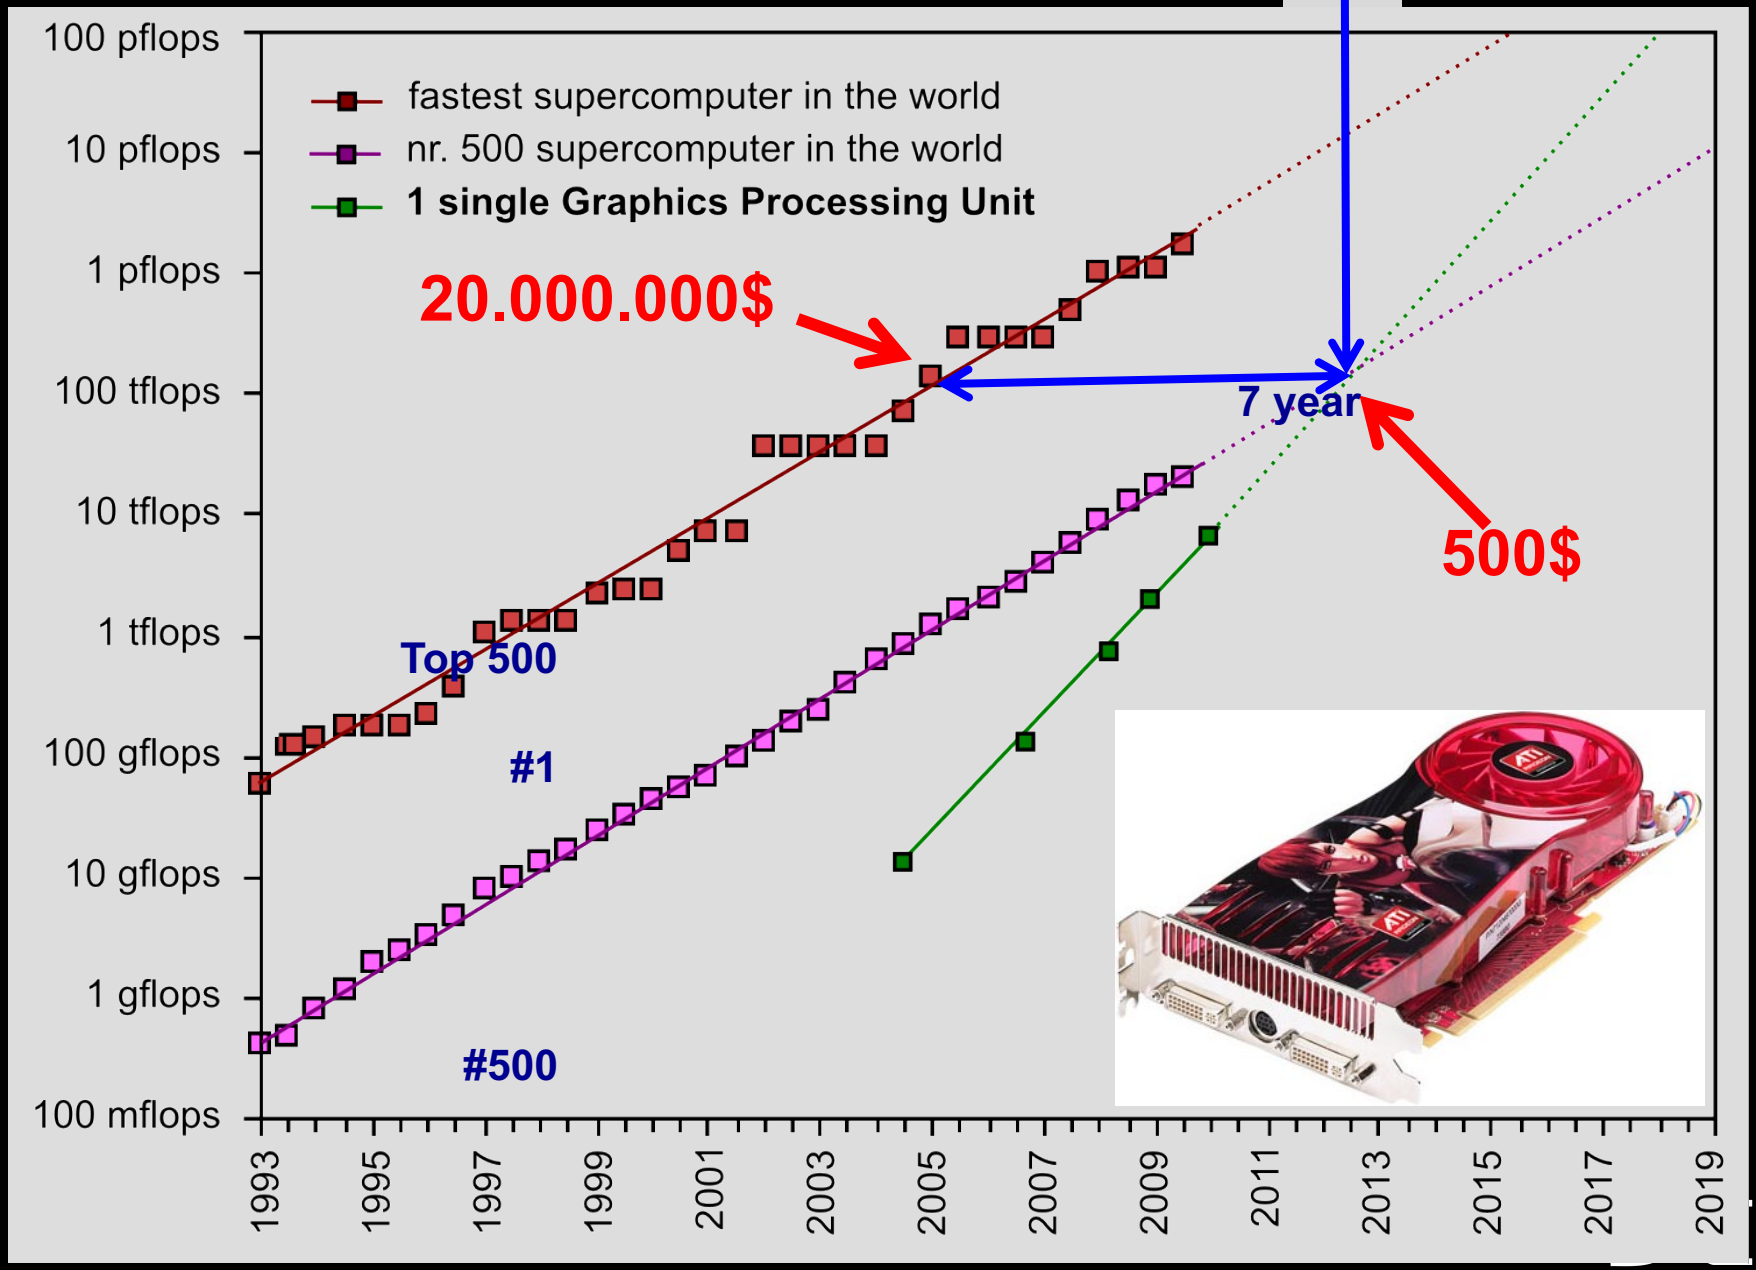

Reliable and Safe!

This omnipresence of IT makes us not only strong but also vulnerable.

- A virus, a hacker, or a system failure can instantly send digital shockwaves around the world.

The hardware and software that allow all our systems to operate is becoming bigger and more complex all the time, and the capacity of networks and data storage is increasing by leaps and bounds.

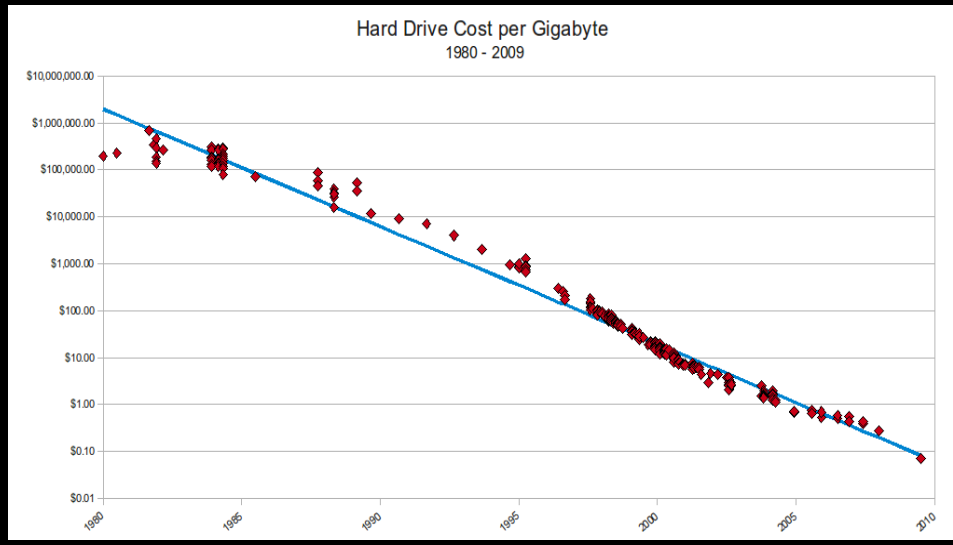

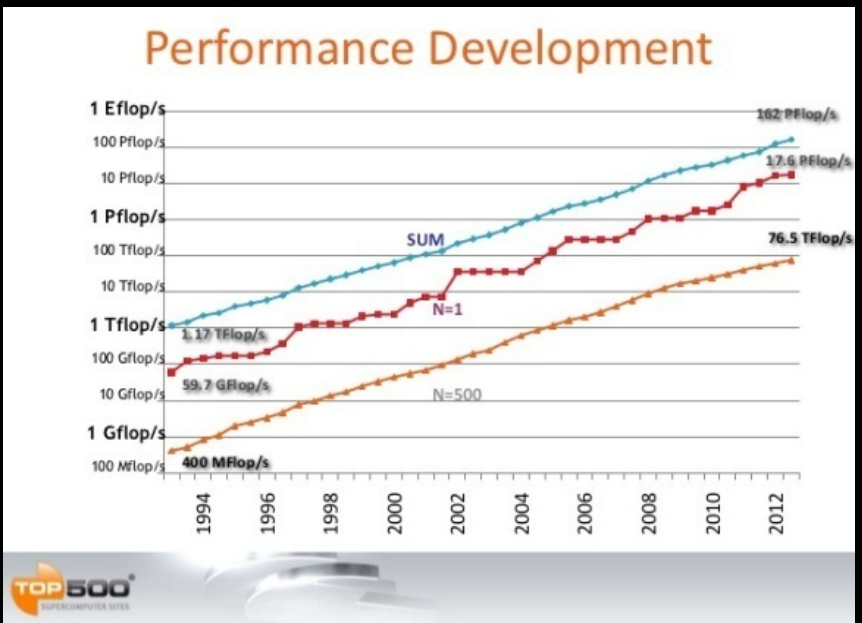

We will soon reach the limits of what is currently feasible and controllable.

https://www.knaw.nl/shared/resources/actueel/publicaties/pdf/20111029.pdf

Internet developments

... more data!



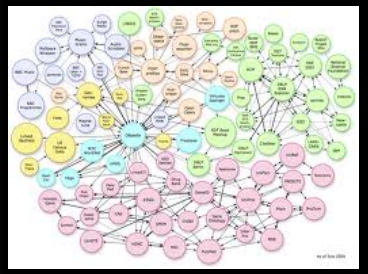

... more realtime!

... more users!

Internet developments

... more data!

Speed

Volume

Deterministic

Real-time

Scalable

Secure

... more users!



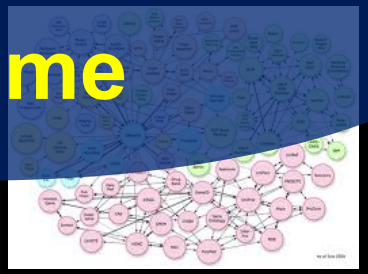



Multiple colors / Fiber

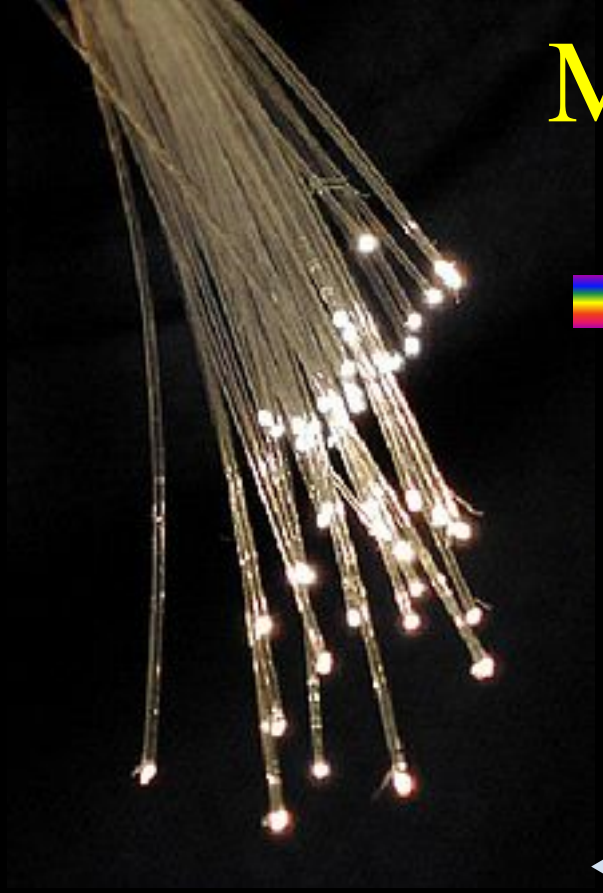

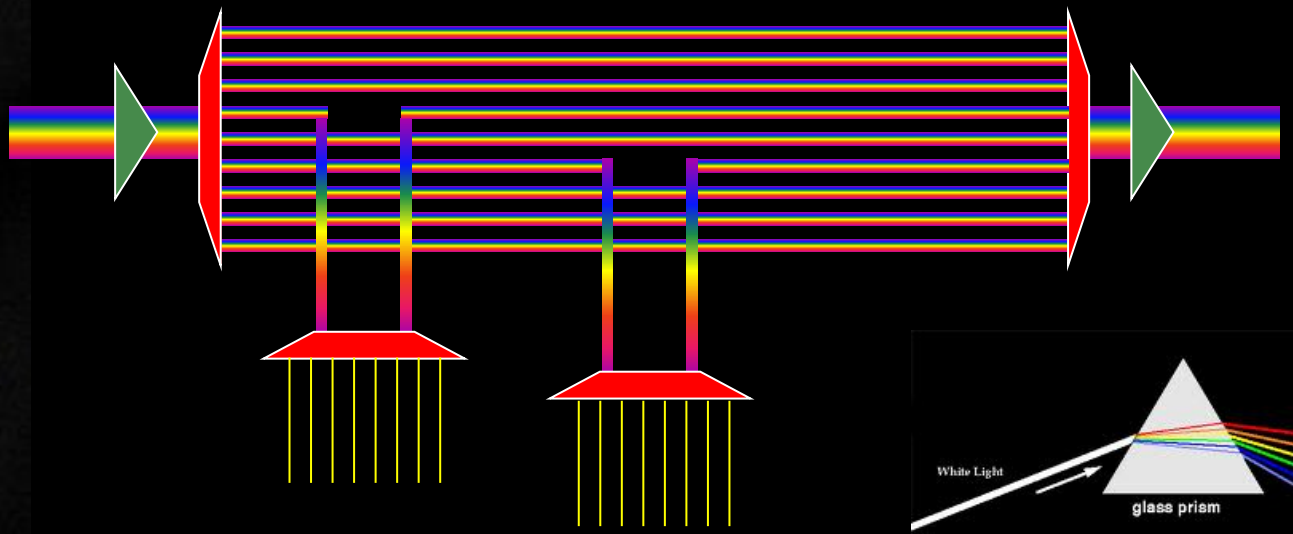

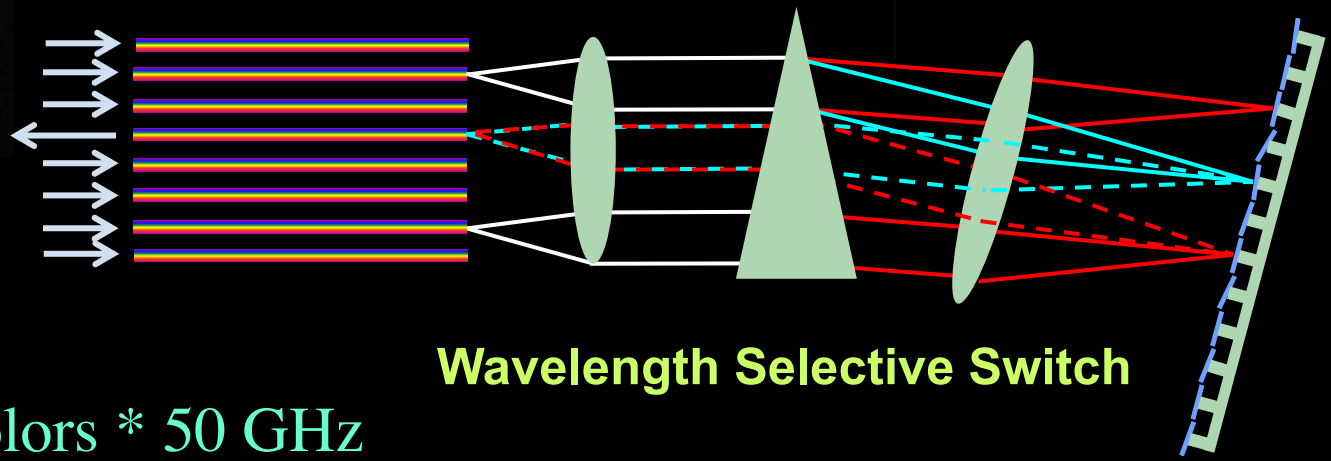

Wavelength Selective Switch

Per fiber: ~ 80-100 colors * 50 GHz

Per color: 10 – 40 – 100 Gbit/s

BW * Distance ~ $2*10^{17}$ bm/s

New: Hollow Fiber!

➔ less RTT!

Wireless Networks

Digital technology reviews

Tech XO provied latest Digital Technology reviews like digital camara,digital lens reviews,digital

HOME | CONTACT US | PRIVACY POLICY

You Are Here : Digital Technology Reviews » Network Devices » Next Generation Throughput With

SEP 06

Next Generation Wireless LAN Technology 802.11ac 1 Gbps throughput with

Published By admin under Network Devices Tags: 1gbps throughput, 1gbps wireless, 1gbps wireless lans, generation, new generation, technologies, technology, throughput, wireless, wireless lan

WiFi is one of the most preferred communication protocol LAN due to the easy comparison and convenience in the digital home. While consumer PC products has just started to migrate to a much higher bandwidth of 802.11n wireless LAN now working on next-generation standard definition is already in progress.

Wireless Networks

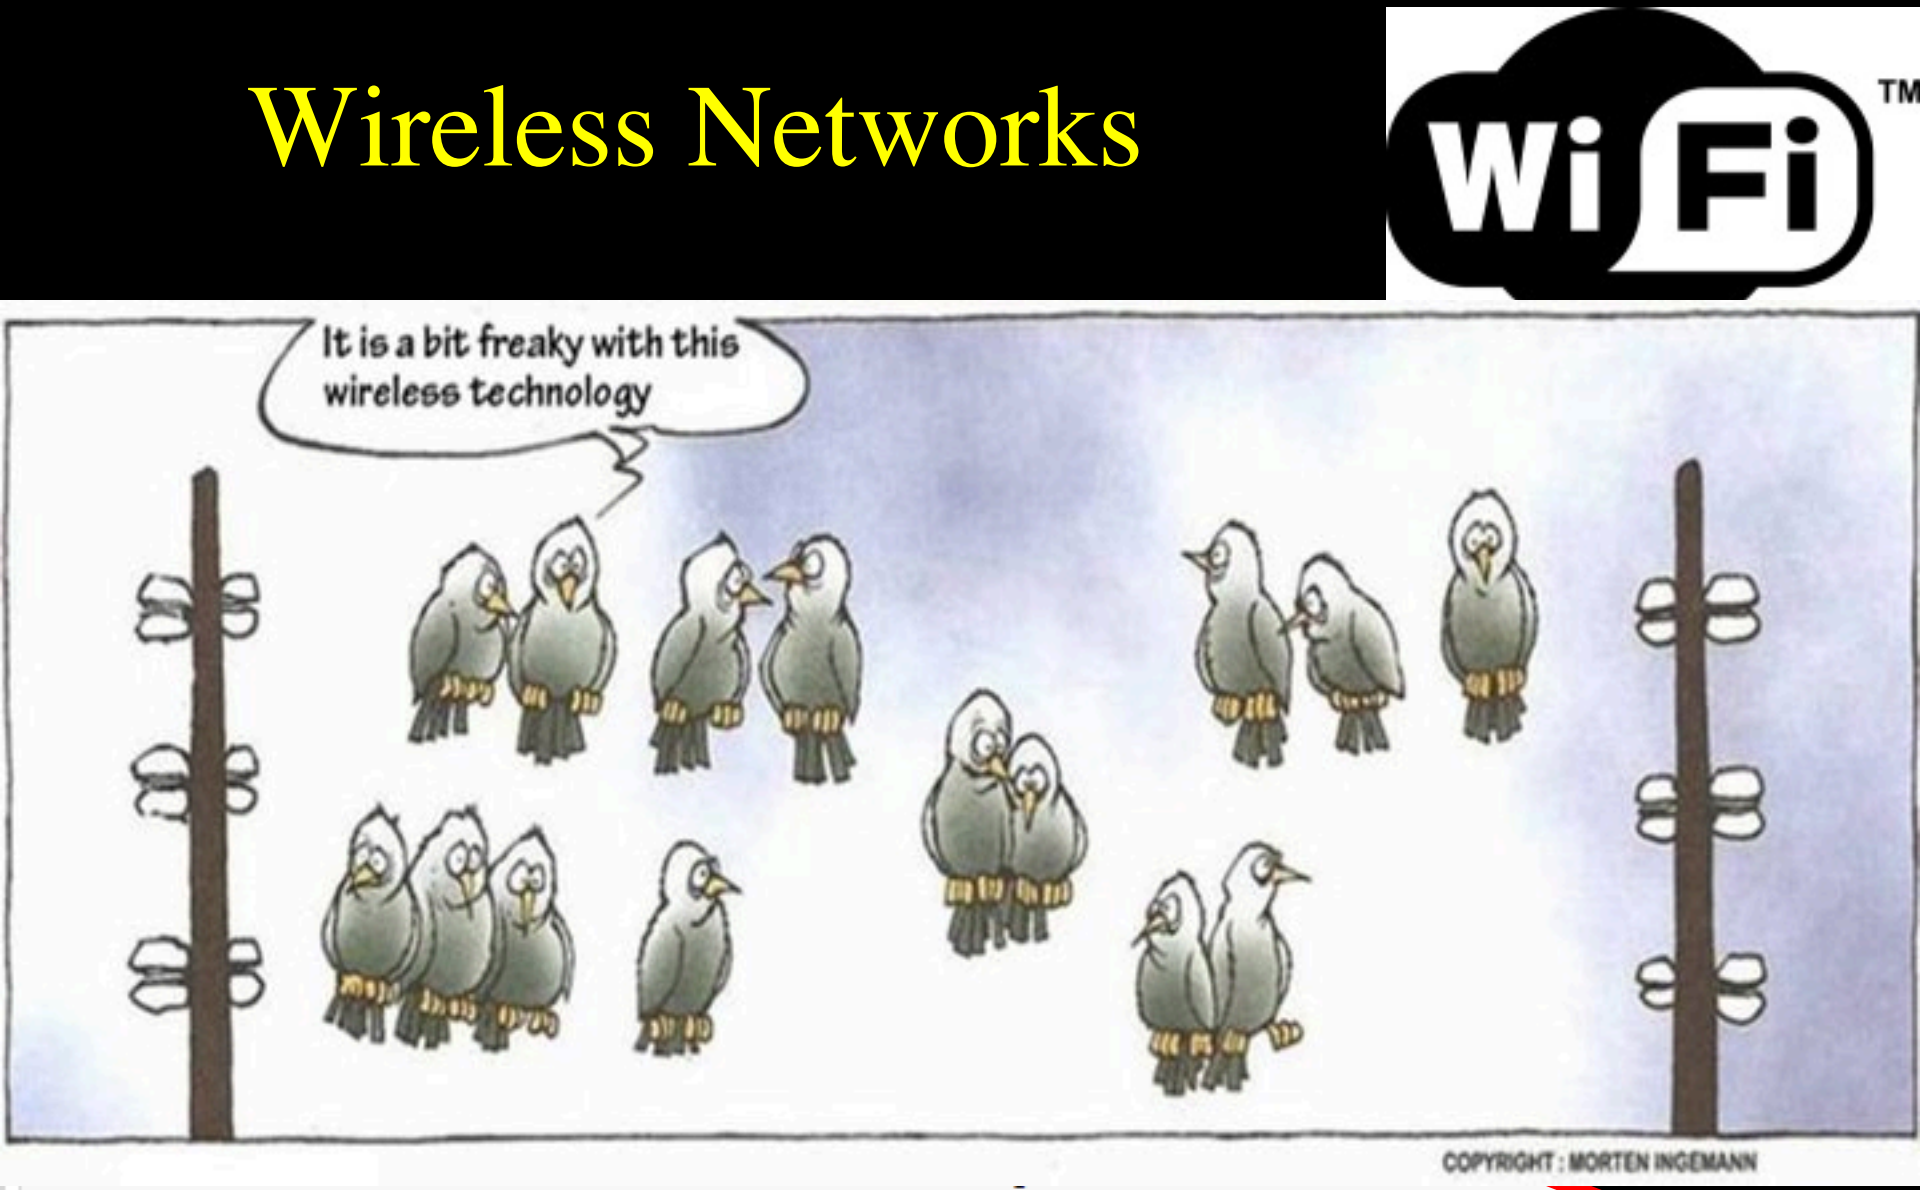

protocol LAN due to the easy comparison and convenience in the **digital home**. While consumer PC products has just started to migrate to a much higher bandwidth of 802.11n wireless LAN now working on next-generation standard definition is already in progress.

The GLIF – LightPaths around the World

F Dijkstra, J van der Ham, P Grosso, C de Laat, “A path finding implementation for multi-layer networks”, Future Generation Computer Systems 25 (2), 142-146.

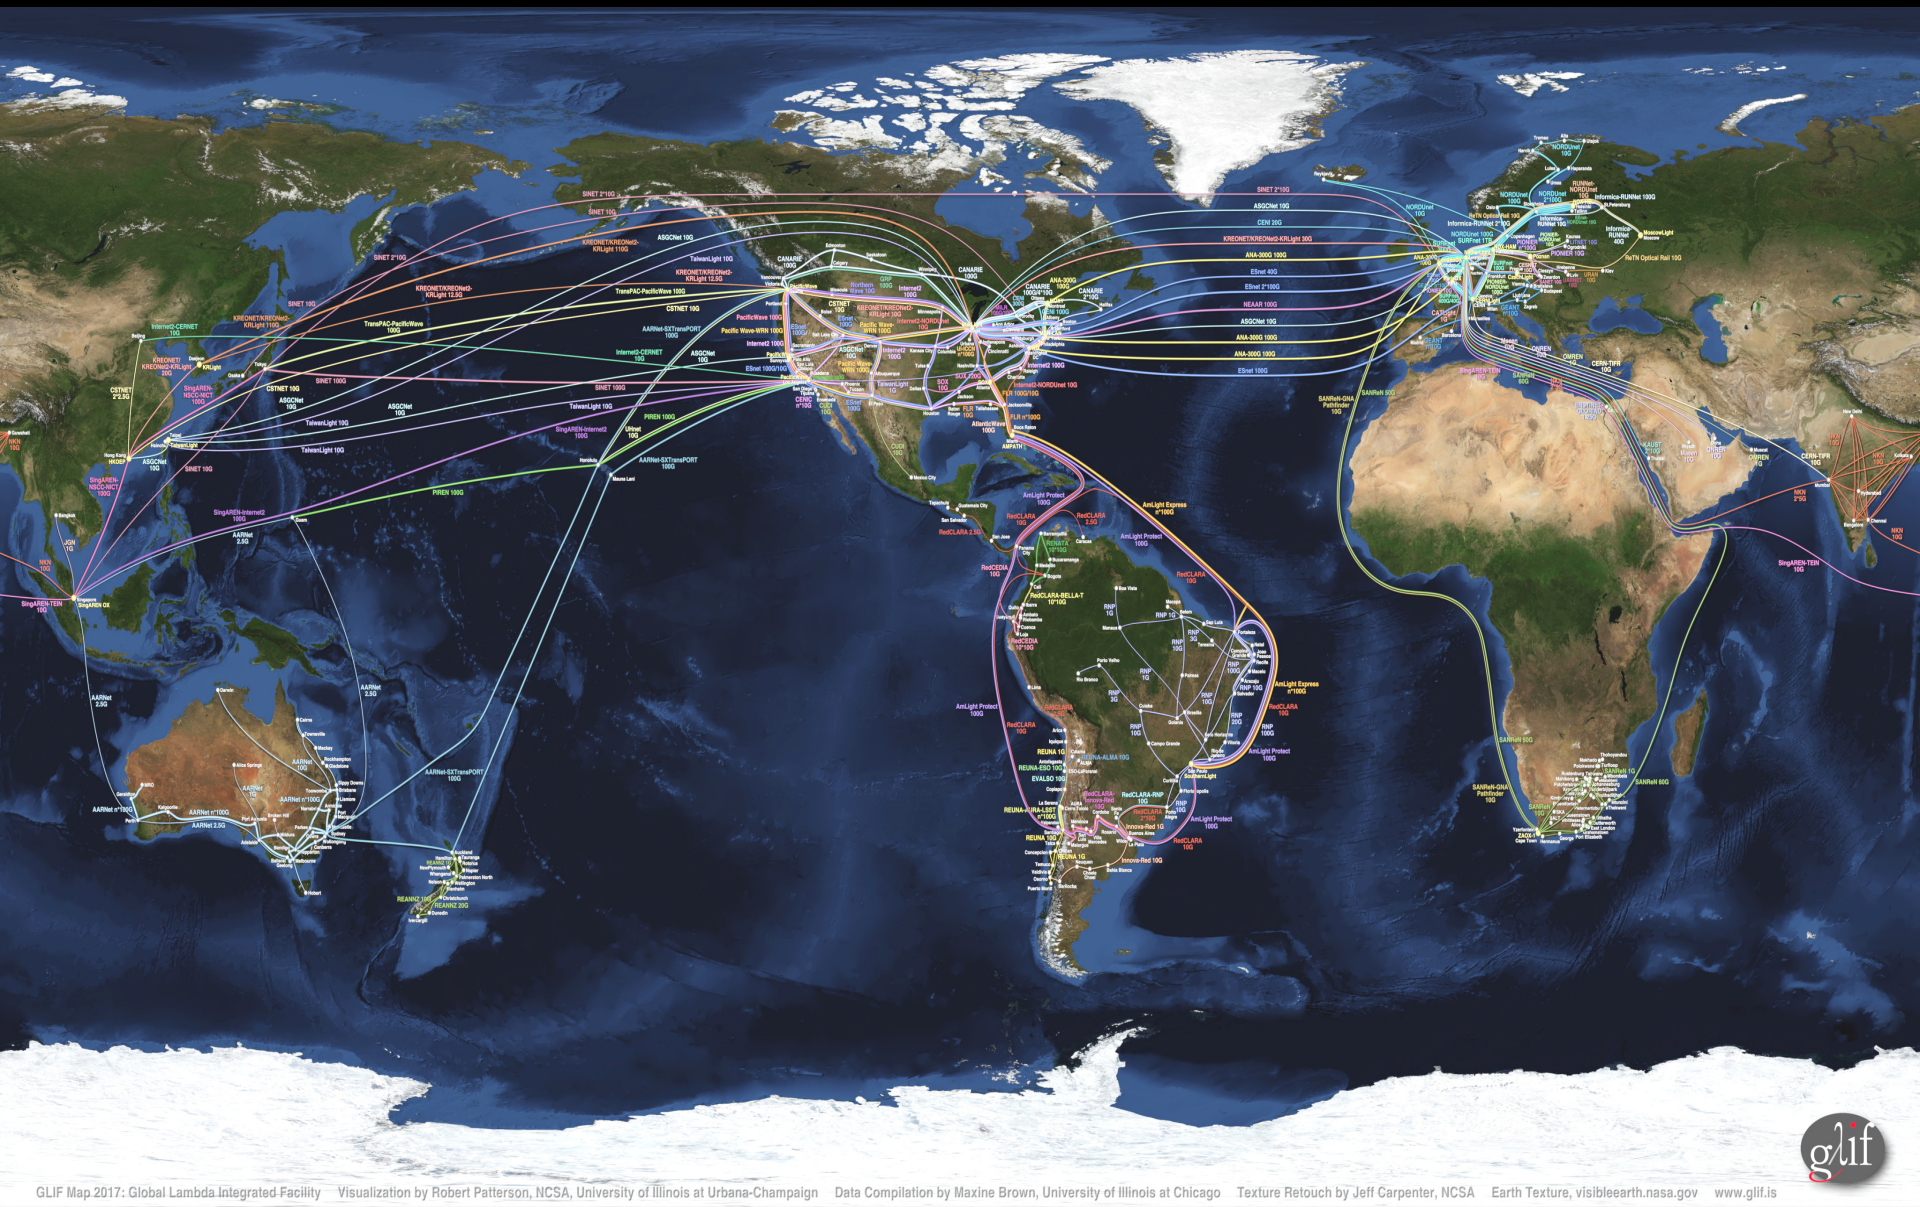

GLIF Map 2017: Global Lambda Integrated Facility Visualization by Robert Patterson, NCSA, University of Illinois at Urbana-Champaign Data Compilation by Maxine Brown, University of Illinois at Chicago Texture Retouch by Jeff Carpenter, NCSA Earth Texture, visibleearth.nasa.gov www.glif.is

Amsterdam is a major hub in The GLIF

F Dijkstra, J van der Ham, P Grosso, C de Laat, “A path finding implementation for multi-layer networks”, Future Generation Computer Systems 25 (2), 142-146.

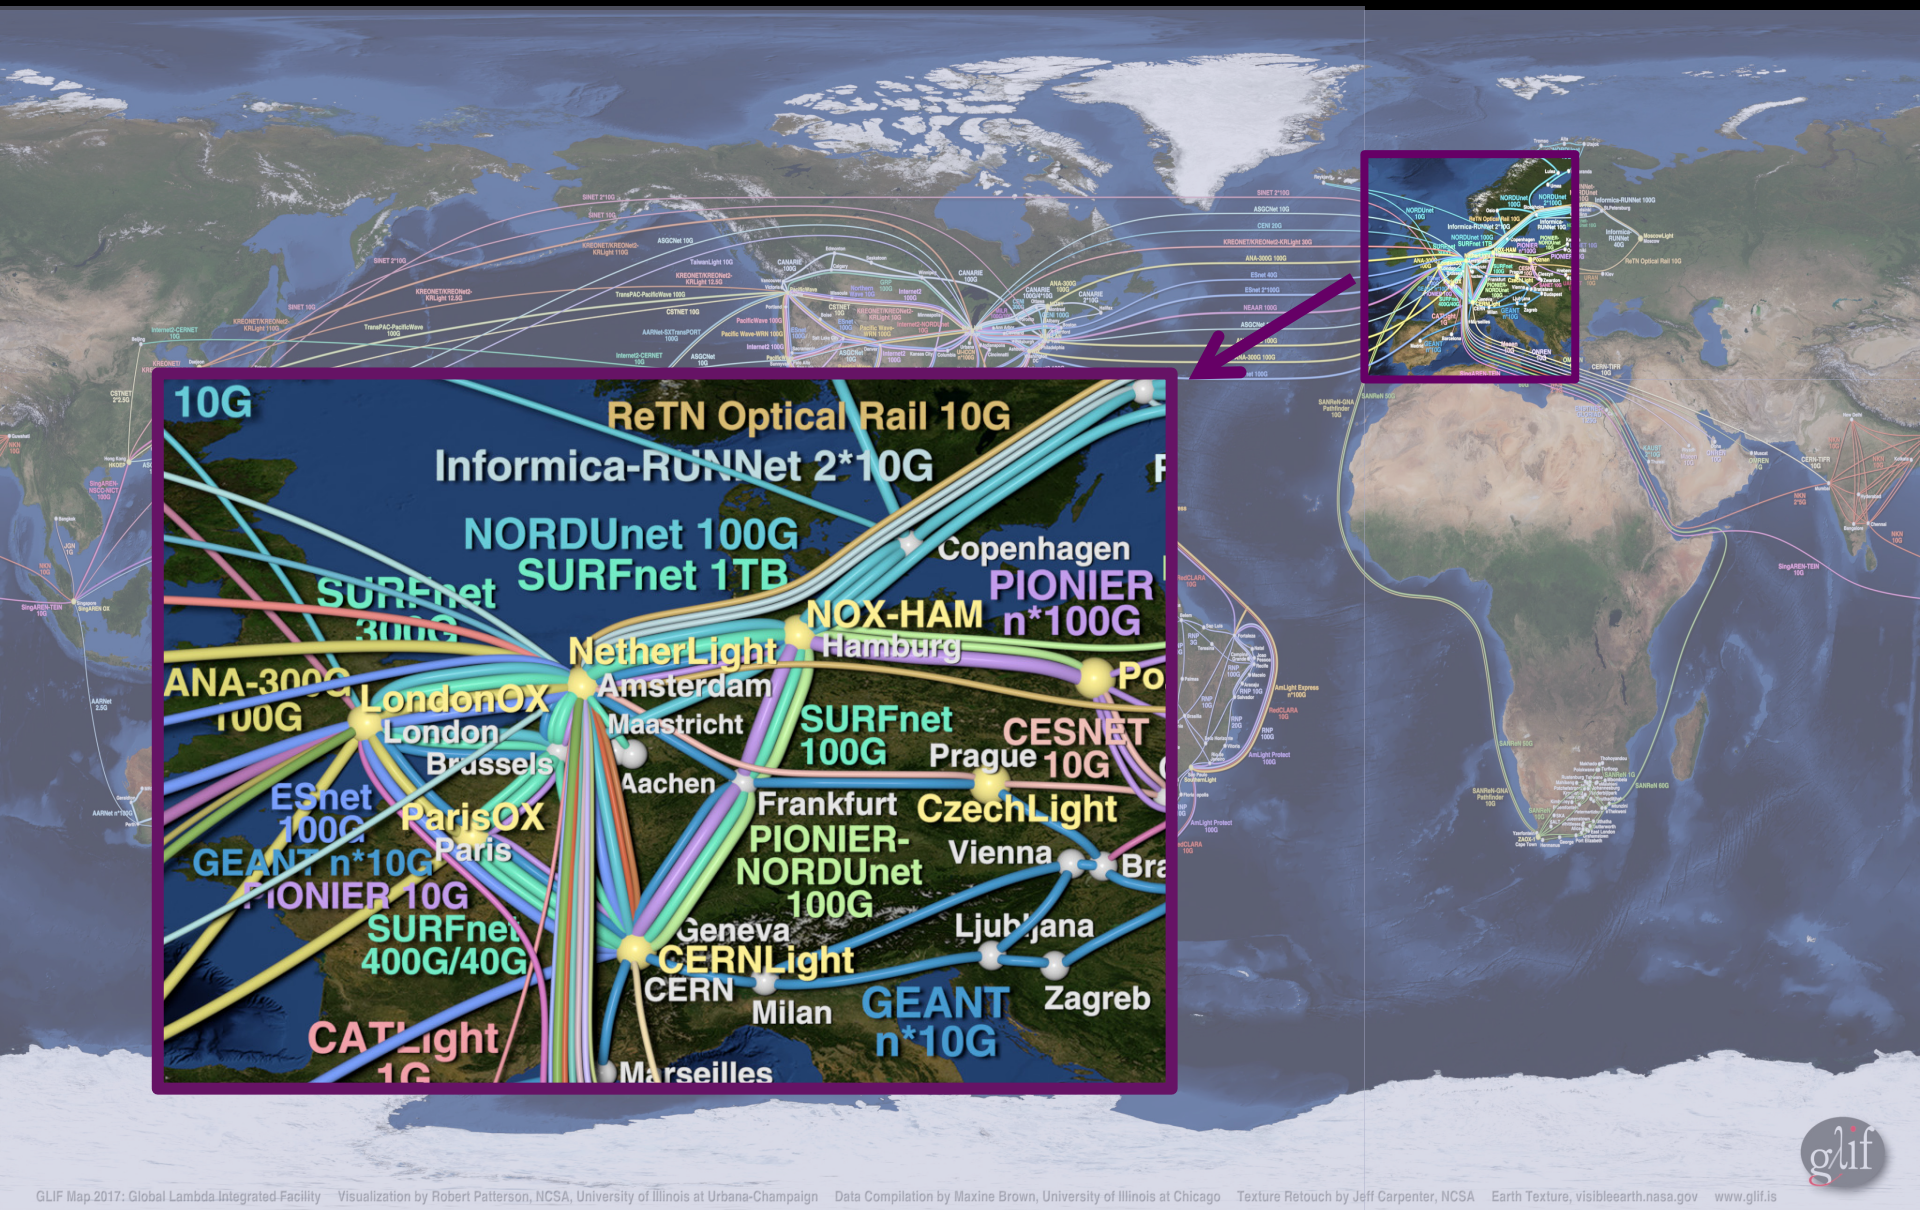

ExoGeni @ OpenLab - UvA

Installed and up June 3th 2013

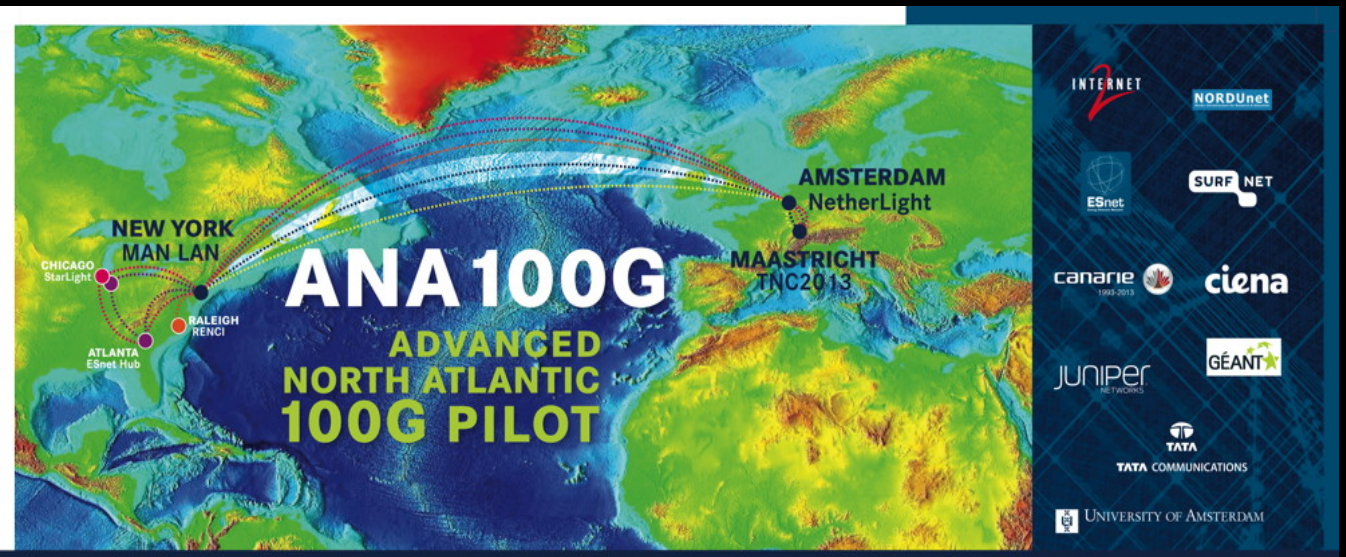

TNC2013 DEMOS JUNE, 2013

DEMO	TITLE	OWNER	AFFILIATION	E-MAIL	A-SIDE	Z-SIDE	PORTS(S) MAN LAN	PORTS(S) TNC2013	DETAILS
1	Big data transfers with multipathing, OpenFlow and MPTCP	Ronald van der Pol	SURFnet	ronald.vanderpol@surfnet.nl	TNC/MECC, Maastricht NL	Chicago, IL	Existing 100G link between internet2 and ESnet	2x40GE (Juniper)+ 2x 10GE (OME6500)	In this demonstration we show how multipathing, OpenFlow and Multipath TCP (MPTCP) can help in large file transfers between data centres (Maastricht and Chicago). An OpenFlow application provisions multiple paths between the servers and MPTCP will be used on the servers to simultaneously send traffic across all those paths. This demo uses 2x40G on the transatlantic 100G link. ESnet provides 2x40G between MAN LAN and StarLight, ACE and USLHCnet provide additional 10GEs.
2	Visualize 100G traffic	Inder Monga	ESnet	imonga@es.net					Using an SNMP feed from the Juniper switch at TNC2013,and/or Brocade ALZS node in MANLAN, this demo would visualize the total traffic on the link, of all demos aggregated. The network diagram will show the transatlantic topology and some of the demo topologies.
3	How many modern servers can fill a 100Gbps Transatlantic Circuit?	Inder Monga	ESnet	imonga@es.net	Chicago, Ill	TNC showfloor	1x 100GE	8x 10GE	In this demonstration, we show that with the proper tuning and tool, only 2 hosts on each continent can generate almost 80Gbps of traffic. Each server has 4 10G NICS connected to a 40G virtual circuit, and has iperf3 running to generate traffic. ESnet's new "iperf3" throughput measurement tool, still in 'beta', combines the best features from other tools such as iperf, nuttcp, and netperf. See: https://my.es.net/demos/tnc2013/
4	First European ExoGENI at Work	Jeroen van der Ham	UvA	vdham@uva.nl	RENCI, NC	UvA, Amsterdam, NL	1x 10GE	1x 10GE	The ExoGENI racks at RENCI and UvA will be interconnected over a 10G pipe and be on continuously, showing GENI connectivity between Amsterdam and the rest of the GENI nodes in the USA.
5	Up and down North Atlantic @ 100G	Michael Enrico	DANTE	michael.enrico@dante.net	TNC showfloor	TNC showfloor	1x 100GE	1x 100GE	The DANTE 100GE test set will be placed at the TNC2013 showfloor and connected to the Juniper at 100G. When this demo is running a loop @ MAN LAN's Brocade switch will ensure that the traffic sent to MAN LAN returns to the showfloor. On display is the throughput and RTT (to show the traffic traveled the Atlantic twice)

Connected via the new 100 Gb/s transatlantic To US-GENI

Alien light From idea to realisation!

40Gb/s alien wavelength transmission via a multi-vendor 10Gb/s DWDM infrastructure

NCF

Alien wavelength advantages

- Direct connection of customer equipment[1] → cost savings
- Avoid OEO regeneration → power savings
- Faster time to service[2] → time savings
- Support of different modulation formats[3] → extend network lifetime

Alien wavelength challenges

- Complex end-to-end optical path engineering in terms of linear (i.e. OSNR, dispersion) and non-linear (FWM, SPM, XPM, Raman) transmission effects for different modulation formats.
- Complex interoperability testing.
- End-to-end monitoring, fault isolation and resolution.
- End-to-end service activation.

In this demonstration we will investigate the performance of a 40Gb/s PM-QPSK alien wavelength installed on a 10Gb/s DWDM infrastructure.

New method to present fiber link quality, FoM (Figure of Merit)

In order to quantify optical link grade, we propose a new method of representing system quality: the FOM (Figure of Merit) for concatenated fiber spans.

$$FOM = \sum_{j=1}^{N} 10^{\left(\frac{L_j}{10}\right)}$$

Lj, span losses in dB
N, number of spans

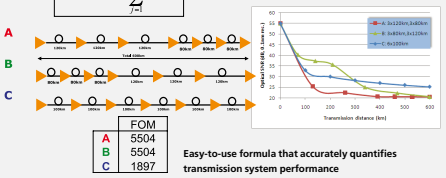

	FOM
A	5504
B	5504
C	1897

Easy-to-use formula that accurately quantifies transmission system performance

Transmission system setup

JOINT SURFnet/NORDUnet 40Gb/s PM-QPSK alien wavelength DEMONSTRATION.

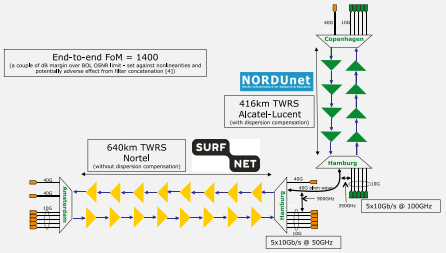

Test results

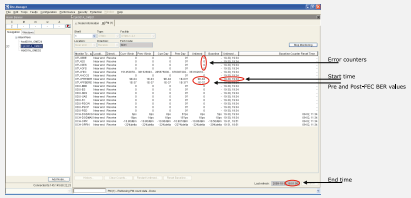

Error-free transmission for 23 hours, 17 minutes → BER < 3.0 10^{-16}

Conclusions

- We have investigated experimentally the all-optical transmission of a 40Gb/s PM-QPSK alien wavelength via a concatenated native and third party DWDM system that both were carrying live 10Gb/s wavelengths.
- The end-to-end transmission system consisted of 1056 km of TWRS (TrueWave Reduced Slope) transmission fiber.
- We demonstrated error-free transmission (i.e. BER below 10-15) during a 23 hour period.
- More detailed system performance analysis will be presented in an upcoming paper.

NORTEL NORDUnet telindus together with ISTY SURF NET

REFERENCES [1] "OPERATIONAL SOLUTIONS FOR AN OPEN DWDM LAYER", O. GERSTEL ET AL, OFC'2009 | [2] "AT&T OPTICAL TRANSPORT SERVICES", BARBARA E. SMITH, OFC'09
[3] "OPEX SAVINGS OF ALL-OPTICAL CORE NETWORKS", ANDREW LORD AND CARL ENGINEER, ECOC2009 | [4] NORTEL/SURFNET INTERNAL COMMUNICATION

ACKNOWLEDGEMENTS WE ARE GRATEFUL TO NORDUNET FOR PROVIDING US WITH BANDWIDTH ON THEIR DWDM LINK FOR THIS EXPERIMENT AND ALSO FOR THEIR SUPPORT AND ASSISTANCE DURING THE EXPERIMENTS. WE ALSO ACKNOWLEDGE TELINDUS AND NORTEL FOR THEIR INTEGRATION WORK AND SIMULATION SUPPORT

Alien light From idea to realisation!

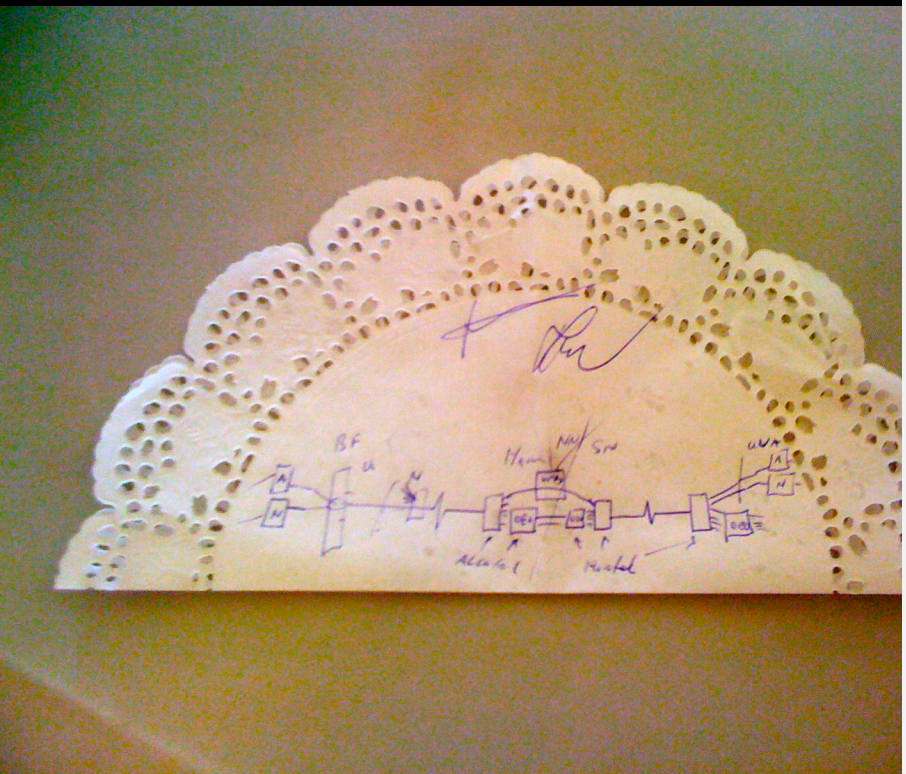

40Gb/s alien wavelength transmission via a multi-vendor 10Gb/s DWDM infrastructure

NCF

Alien wavelength advantages

- Direct connection of customer equipment[1] → cost savings
- Avoid OEO regeneration → power savings
- Faster time to service[2] → time savings
- Support of different modulation formats[3] → extend network lifetime

Alien wavelength challenges

- Complex end-to-end optical path engineering in terms of linear (i.e. OSNR, dispersion) and non-linear (FWM, SPM, XPM, Raman) transmission effects for different modulation formats.
- Complex interoperability testing.
- End-to-end monitoring, fault isolation and resolution.
- End-to-end service activation.

In this demonstration we will investigate the performance of a 40Gb/s PM-QPSK alien wavelength installed on a 10Gb/s DWDM infrastructure.

New method to present fiber link quality, FoM (Figure of Merit)

In order to quantify optical link grade, we propose a new method of representing system quality: the FOM (Figure of Merit) for concatenated fiber spans.

$$FOM = \sum_{j=1}^{N} 10^{\left(\frac{L_j}{10}\right)}$$

Lj, span losses in dB
N, number of spans



	FOM
A	5504
B	5504
C	1897

Easy-to-use formula that accurately quantifies transmission system performance

Transmission system setup

JOINT SURFnet/NORDUnet 40Gb/s PM-QPSK alien wavelength DEMONSTRATION.

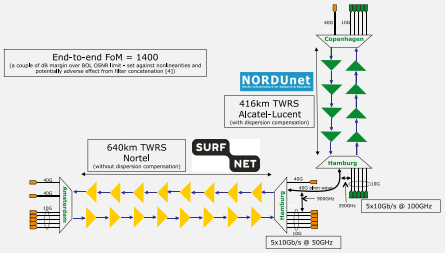

Test results

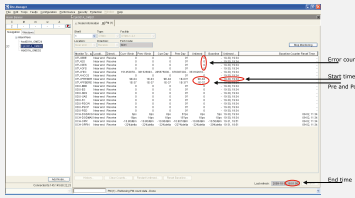

Error-free transmission for 23 hours, 17 minutes → BER < 3.0 10^{-16}

Conclusions

- We have investigated experimentally the all-optical transmission of a 40Gb/s PM-QPSK alien wavelength via a concatenated native and third party DWDM system that both were carrying live 10Gb/s wavelengths.
- The end-to-end transmission system consisted of 1056 km of TWRS (TrueWave Reduced Slope) transmission fiber.
- We demonstrated error-free transmission (i.e. BER below 10-15) during a 23 hour period.
- More detailed system performance analysis will be presented in an upcoming paper.

NORTEL NORDUnet telindus together with ISIT SURF NET

REFERENCES [1] "OPERATIONAL SOLUTIONS FOR AN OPEN DWDM LAYER", O. GERSTEL ET AL, OFC'2009 | [2] "AT&T OPTICAL TRANSPORT SERVICES", BARBARA E. SMITH, OFC'09
[3] "OPEX SAVINGS OF ALL-OPTICAL CORE NETWORKS", ANDREW LORD AND CARL ENGINEER, ECOC2009 | [4] NORTEL/SURFNET INTERNAL COMMUNICATION

ACKNOWLEDGEMENTS WE ARE GRATEFUL TO NORDUNET FOR PROVIDING US WITH BANDWIDTH ON THEIR DWDM LINK FOR THIS EXPERIMENT AND ALSO FOR THEIR SUPPORT AND ASSISTANCE DURING THE EXPERIMENTS. WE ALSO ACKNOWLEDGE TELINDUS AND NORTEL FOR THEIR INTEGRATION WORK AND SIMULATION SUPPORT

ClearStream @ TNC2011

Setup codename: FlightCees

UvA

iPerf
I7 3.2 GHz Q-core

iPerf
Amd Ph II 3.6 GHz HexC

Mellanox

40G E

Copenhagen

iPerf
2* dual 2.8 GHz Q-core

iPerf

Mellanox

CIEN A OME 6500

CERN

CIEN A OME 6500

CIENA DWDM

17 ms RTT

Hamburg

Alcatel DWDM

27 ms RTT

CIEN A OME 6500

Amsterdam – Geneva (CERN) – Copenhagen – 4400 km (2700 km alien light)

Visit CIENA Booth

surf to http://tnc.delaat.net/tnc11

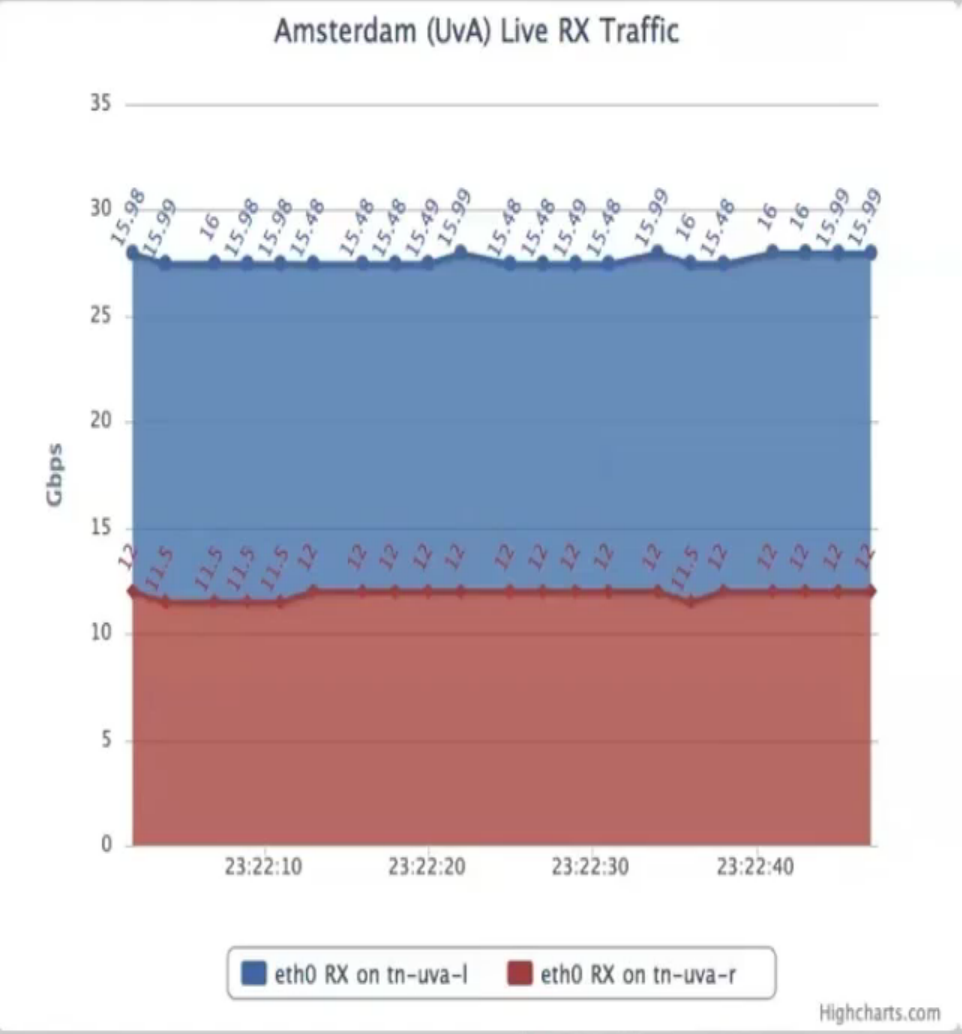

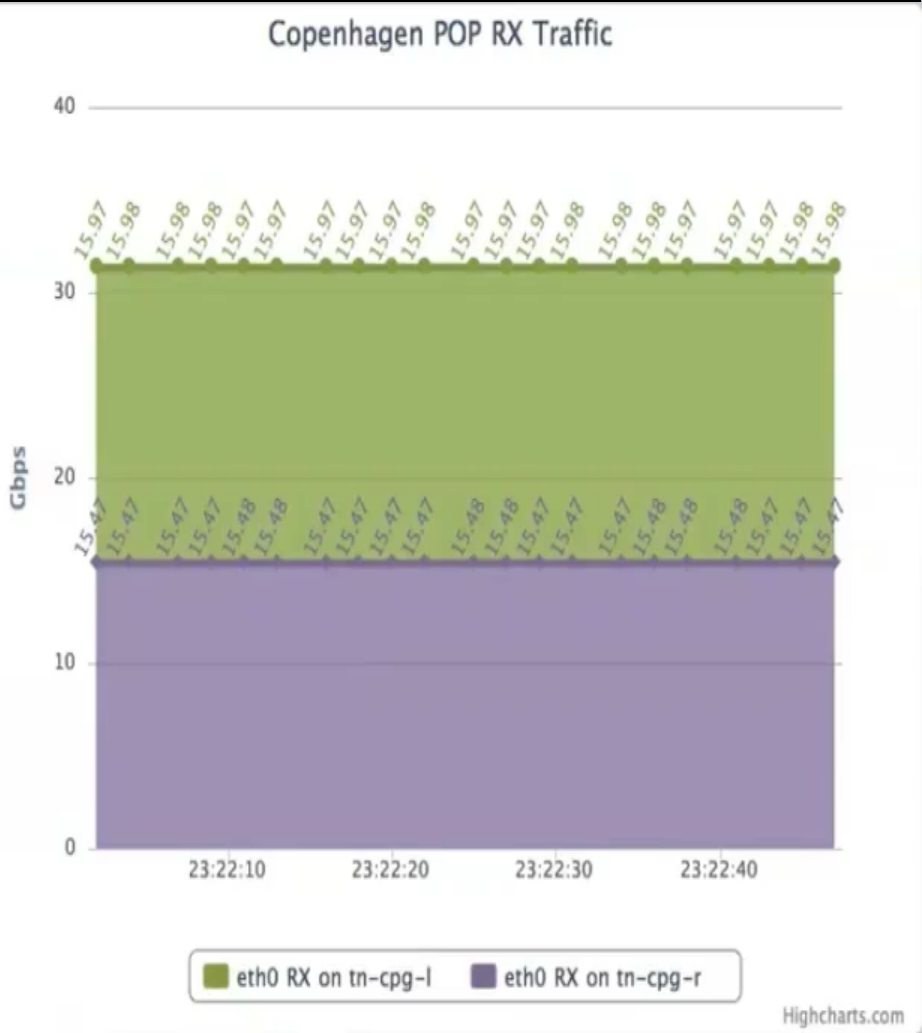

27.99 Gbps to Amsterdam <-> 31.45 Gbps to Copenhagen

Total Throughput 59.44 Gbps RTT 44.010 ms

Server Architecture

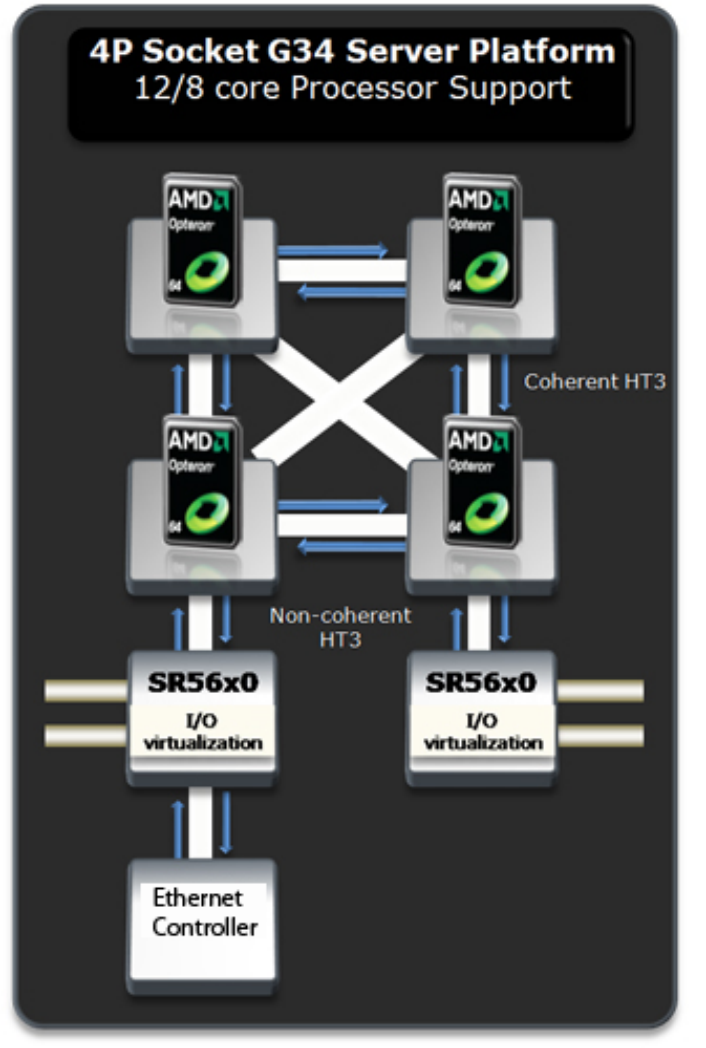

DELL R815

4 x AMD Opteron 6100

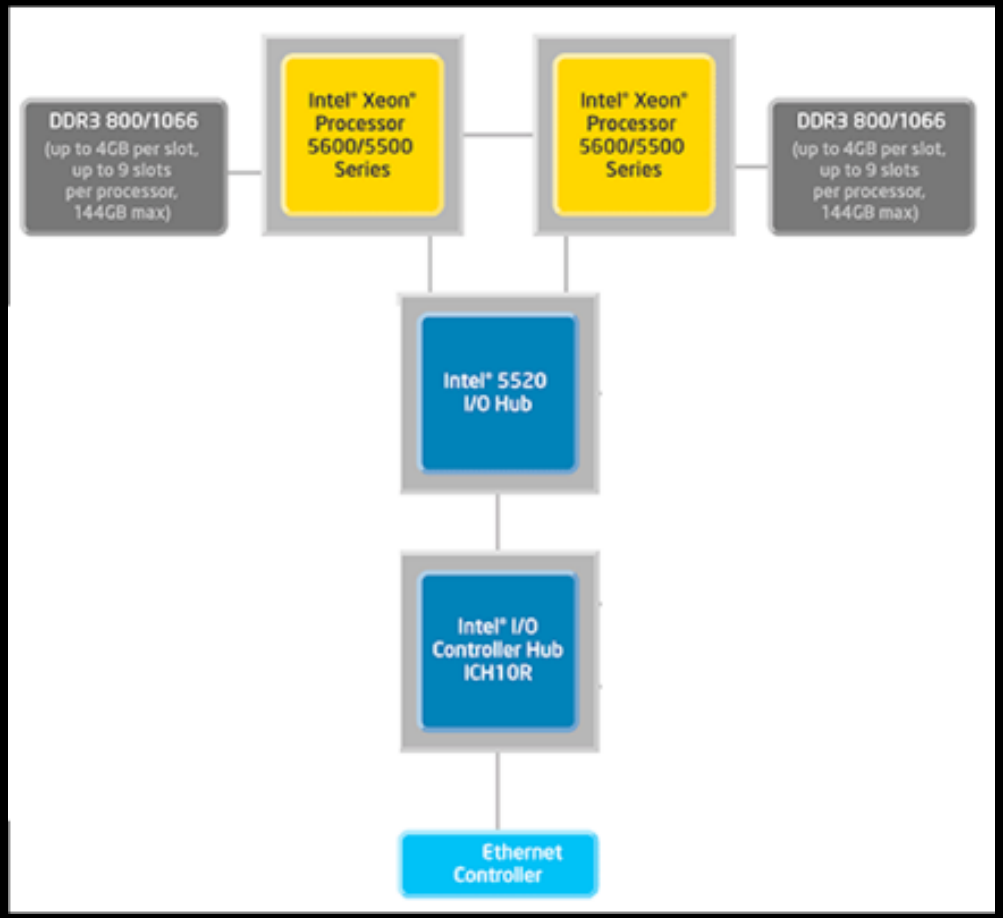

Supermicro X8DTT-HIBQF

2 x Intel Xeon

CPU Topology benchmark

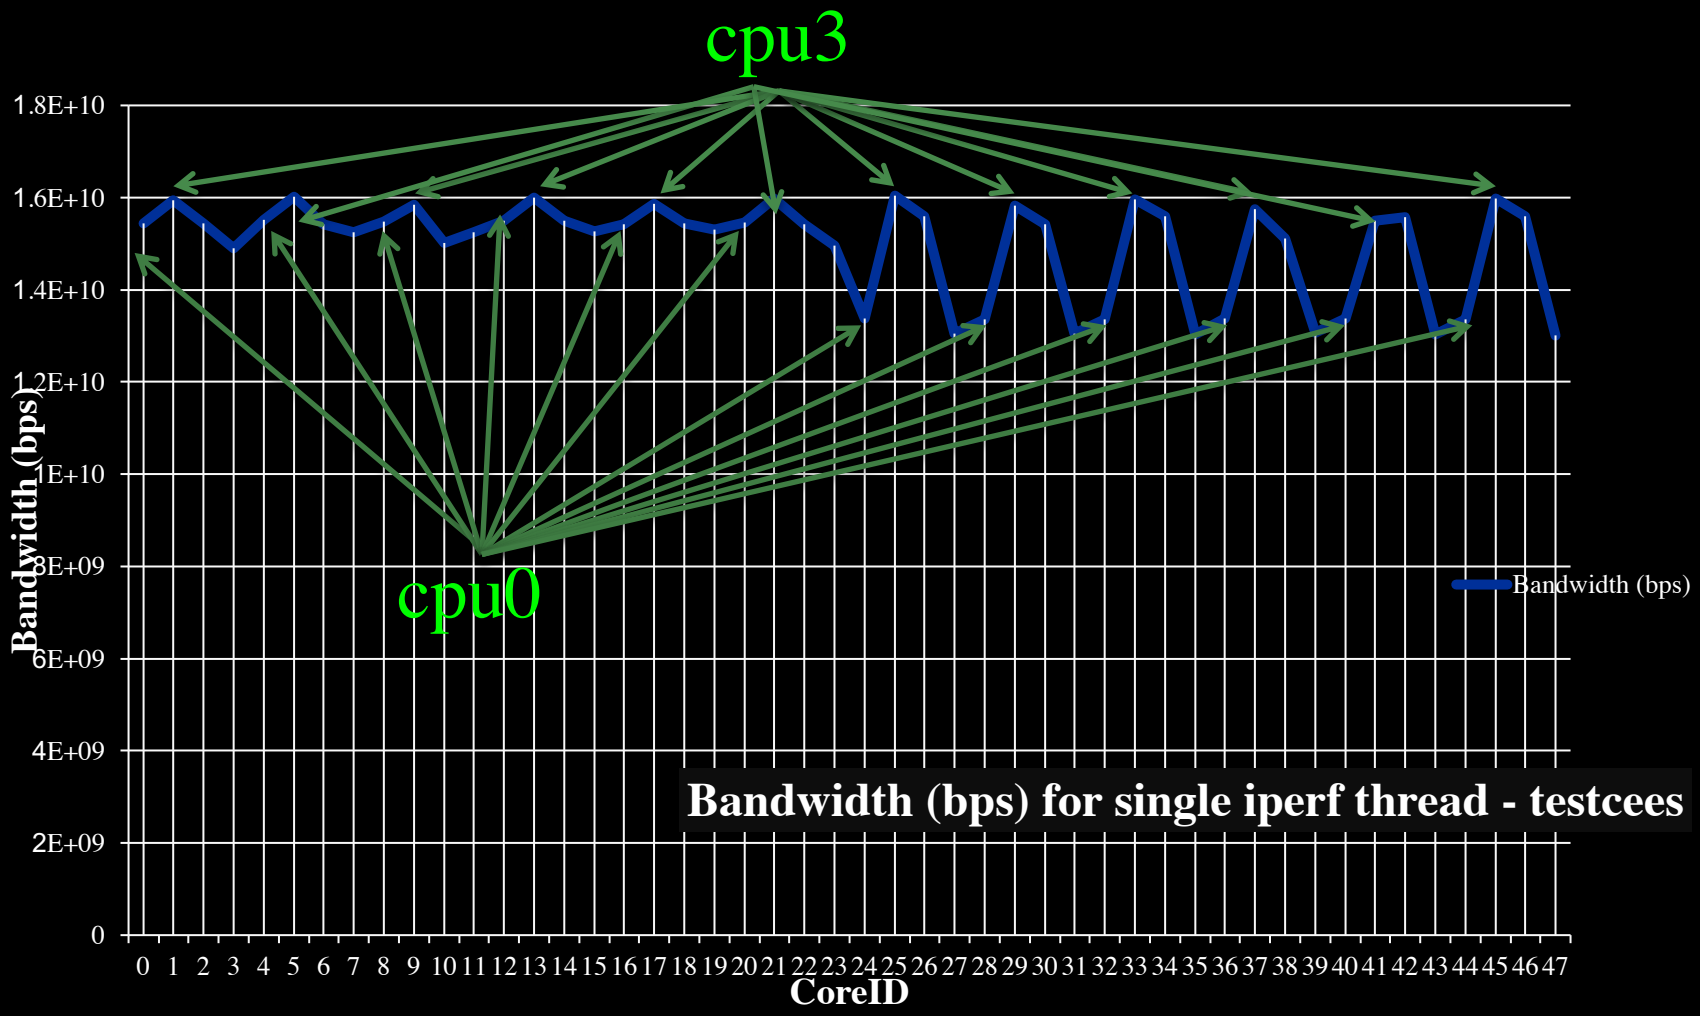

We used numactl to bind iperf to cores

Mission

Can we create smart and safe data processing infrastructures that can be tailored to diverse application needs?

- *Capacity*
  - *Bandwidth on demand, QoS, architectures, photonics, performance*
- ***Capability***
  - ***Programmability, virtualization, complexity, semantics, workflows***
- *Security*
  - *Anonymity, integrity of data in distributed data processing*
- *Sustainability*
  - *Greening infrastructure, awareness*
- *Resilience*
  - *Systems under attack, failures, disasters*

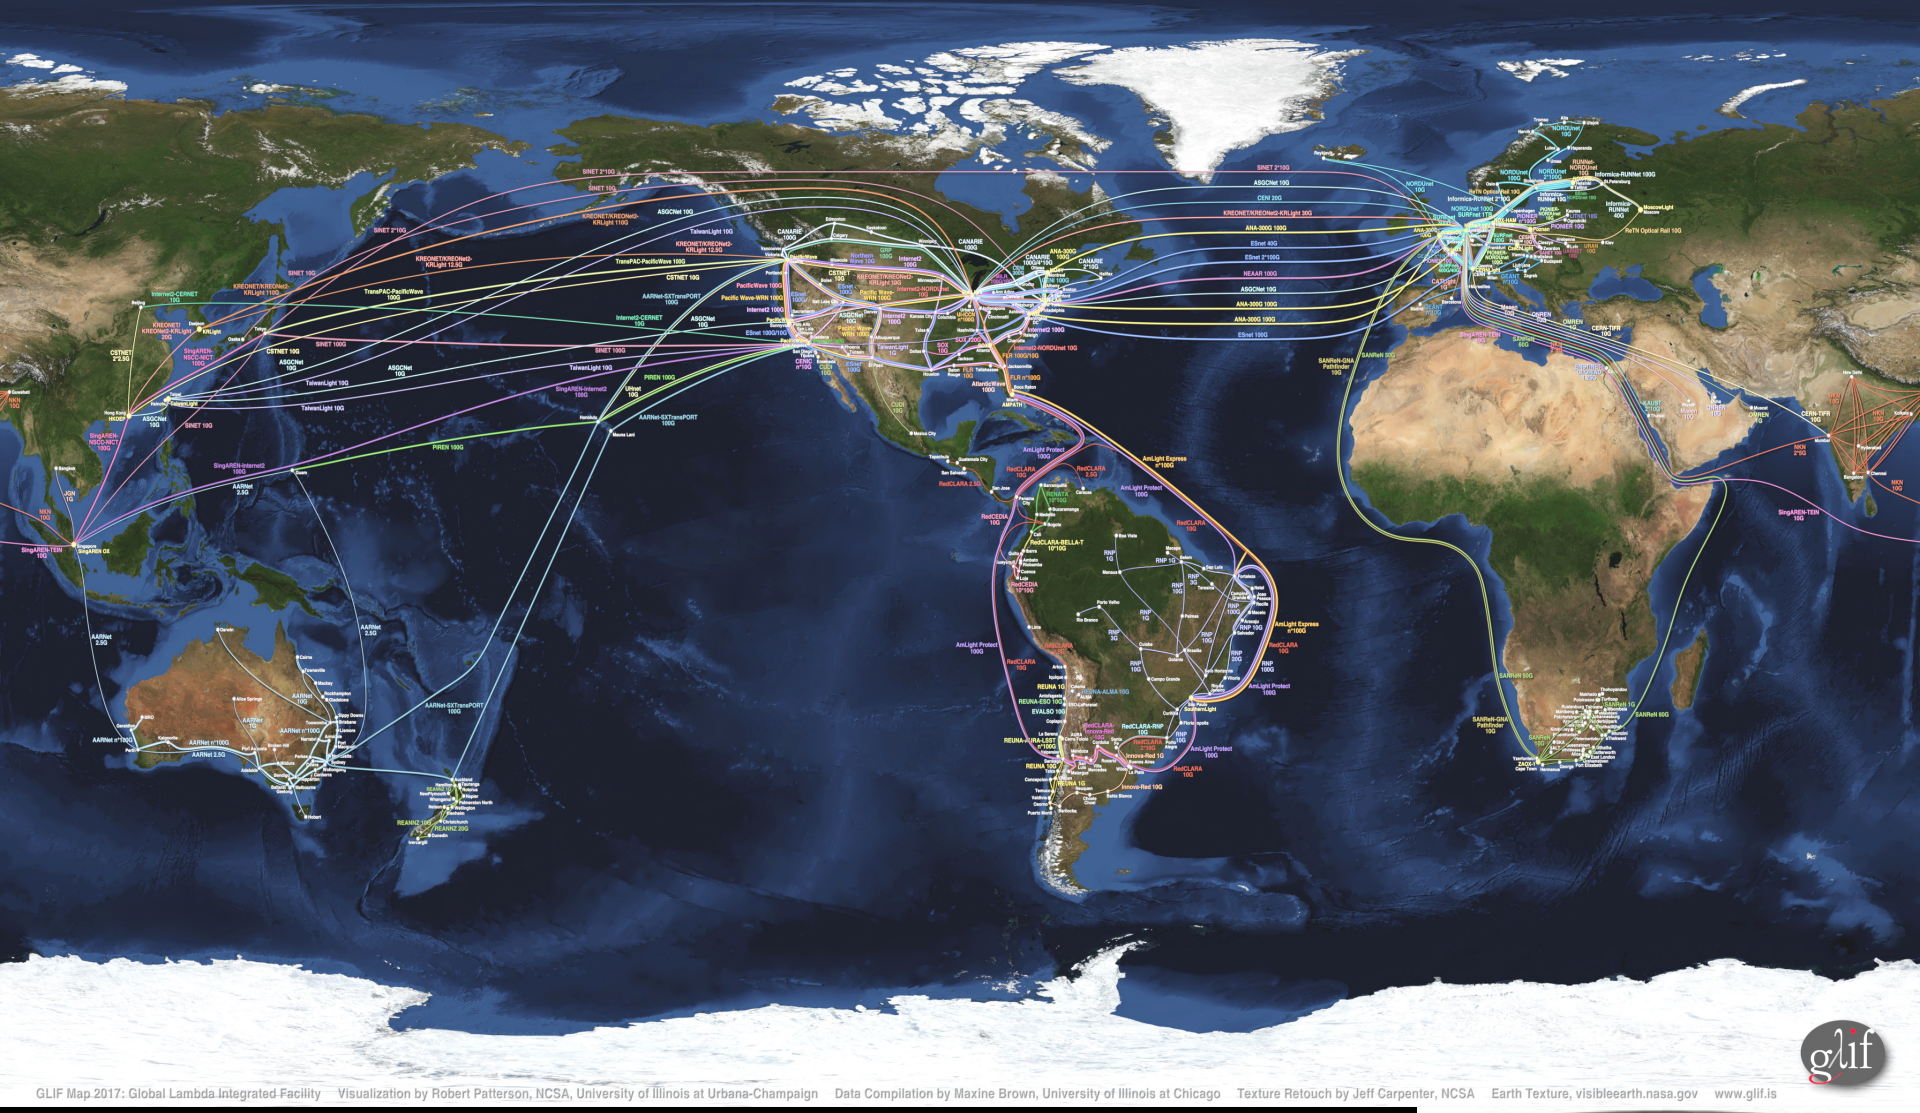

We investigate: TOMTOM for complex networks!

California Institute for Telecommunications and Information Technology (Calit2)
Wide Area Network

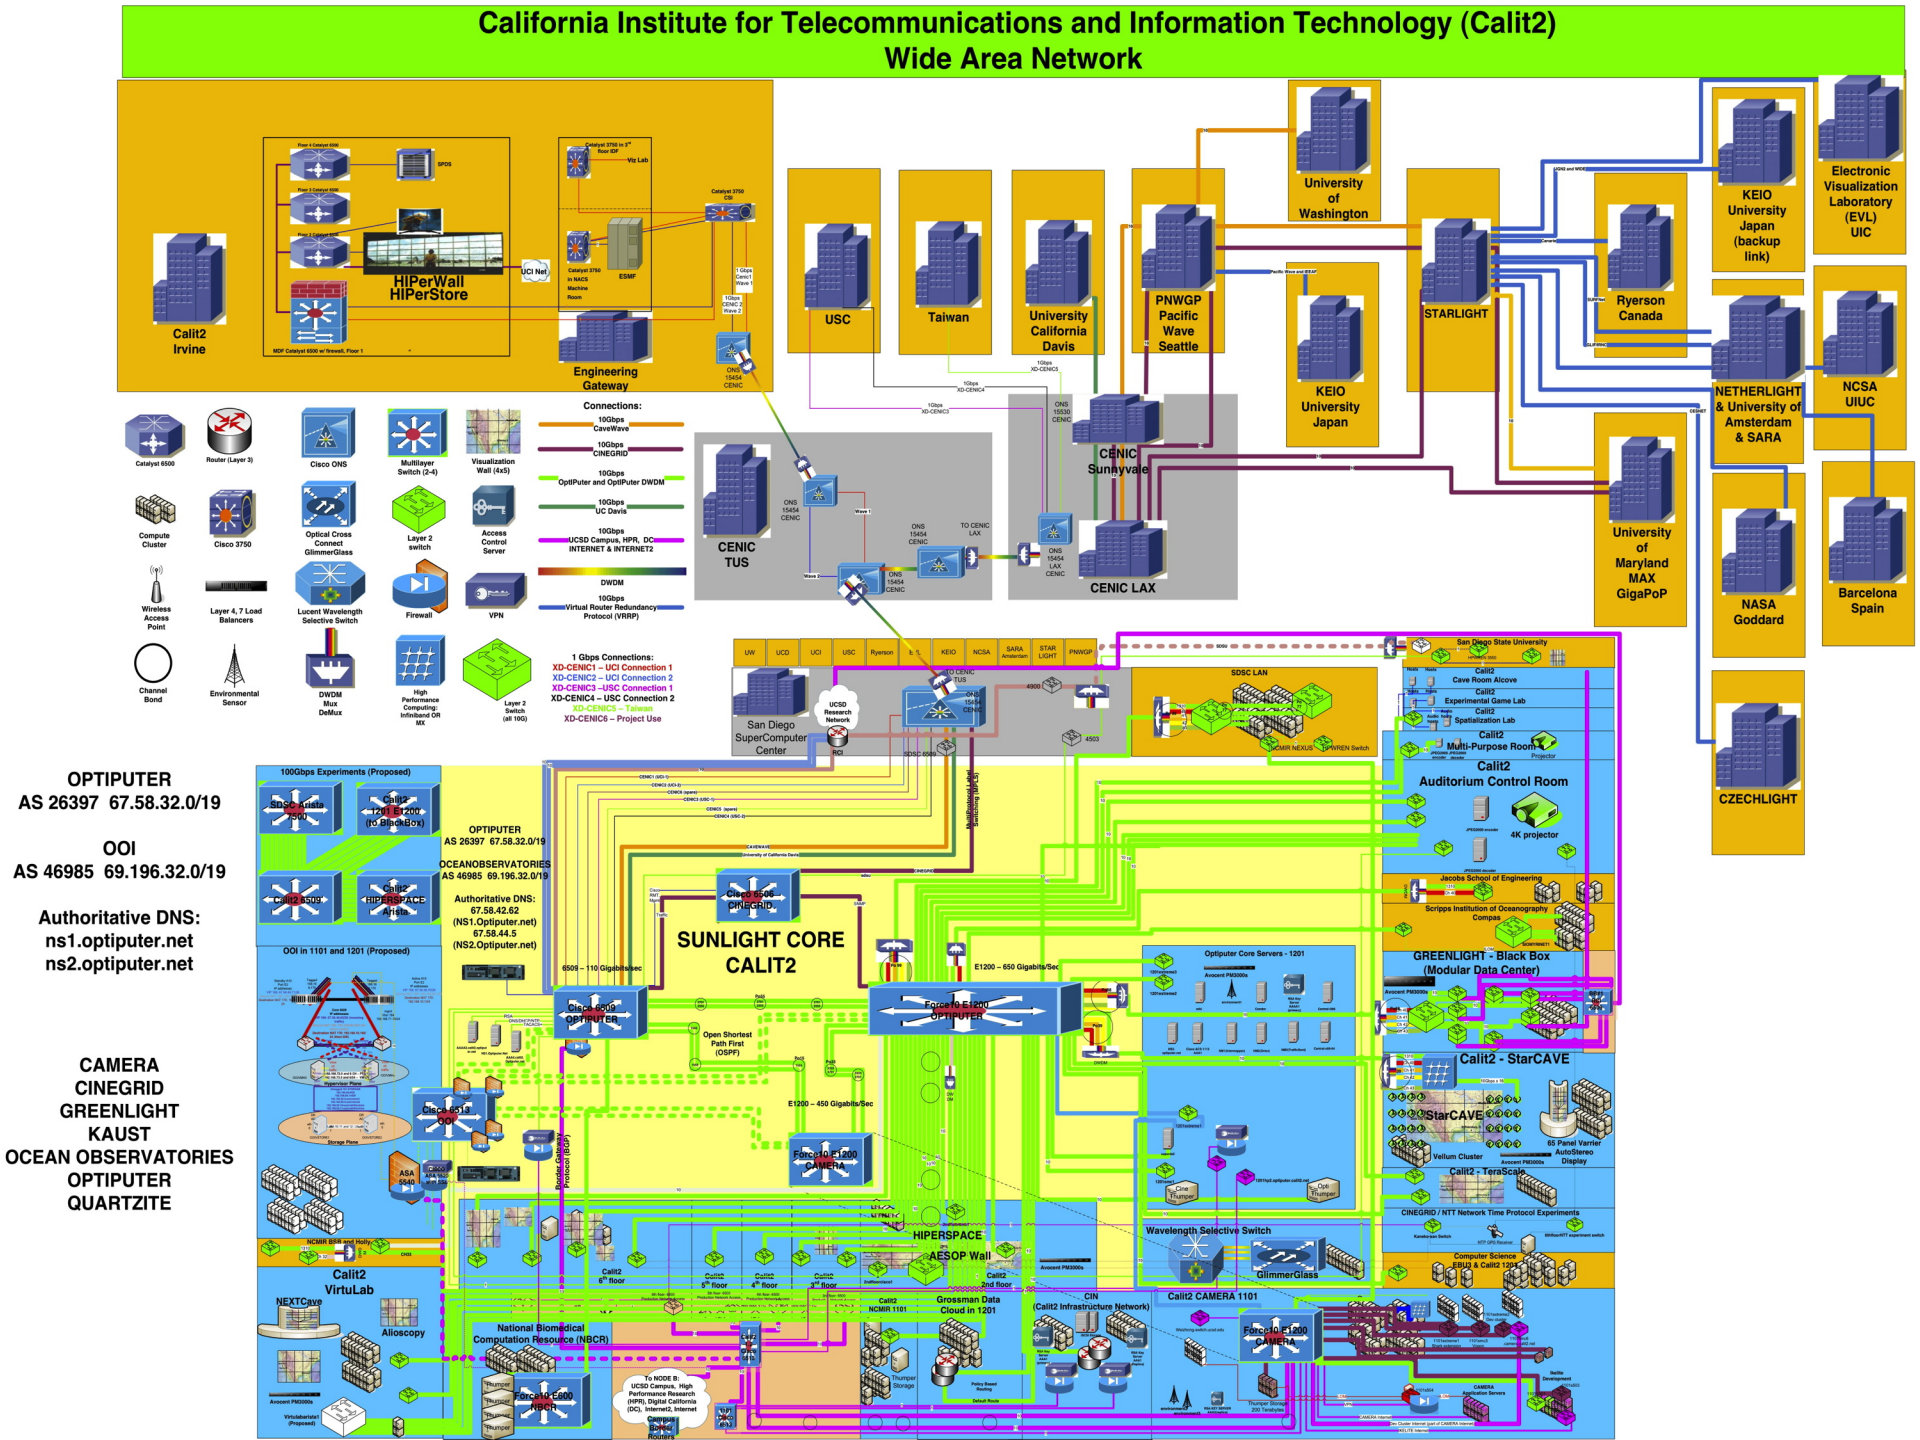

LinkedIN for Infrastructure

- From semantic Web / Resource Description Framework.
- The RDF uses XML as an interchange syntax.
- Data is described by triplets (Friend of a Friend):

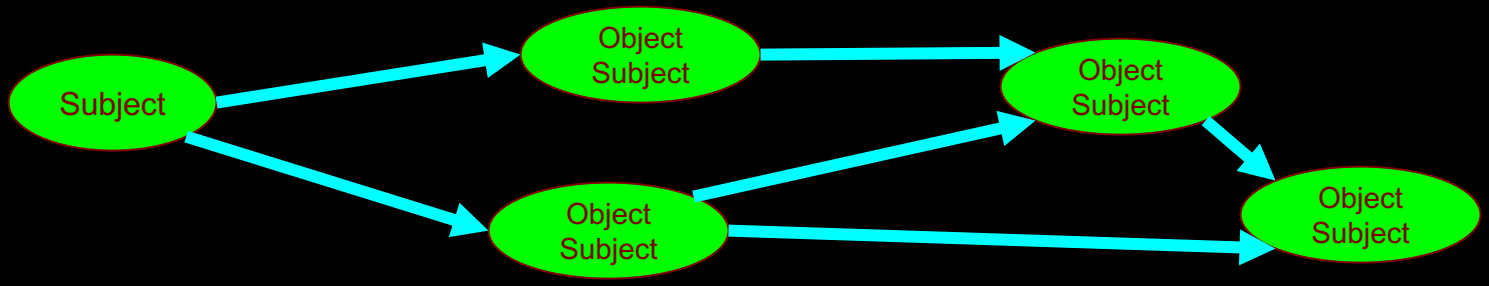

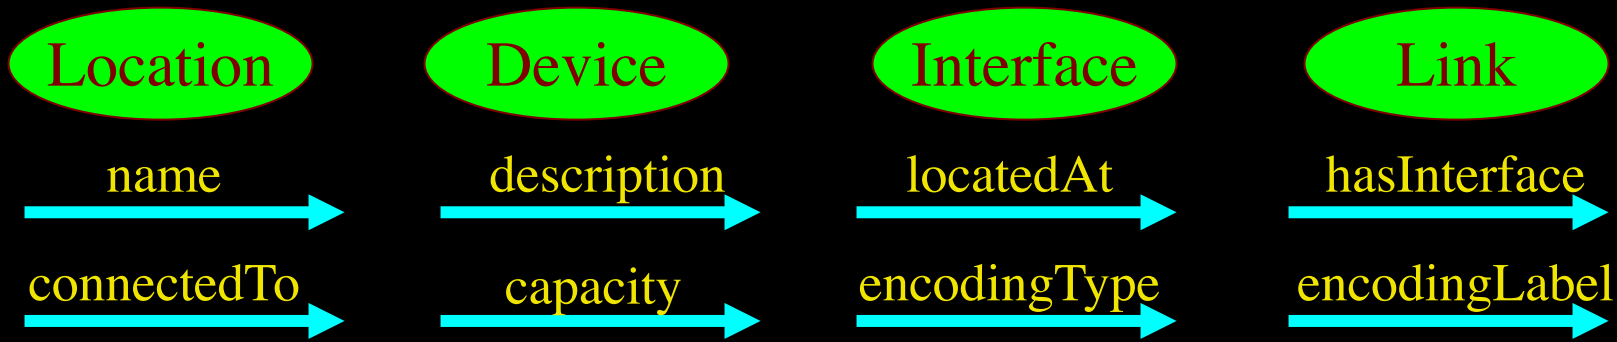

Network Description Language

Choice of RDF instead of XML syntax

Grounded modeling based on G0805 description:

Article: F. Dijkstra, B. Andree, K. Koymans, J. van der Ham, P. Grosso, C. de Laat, *"A Multi-Layer Network Model Based on ITU-T G.805"*

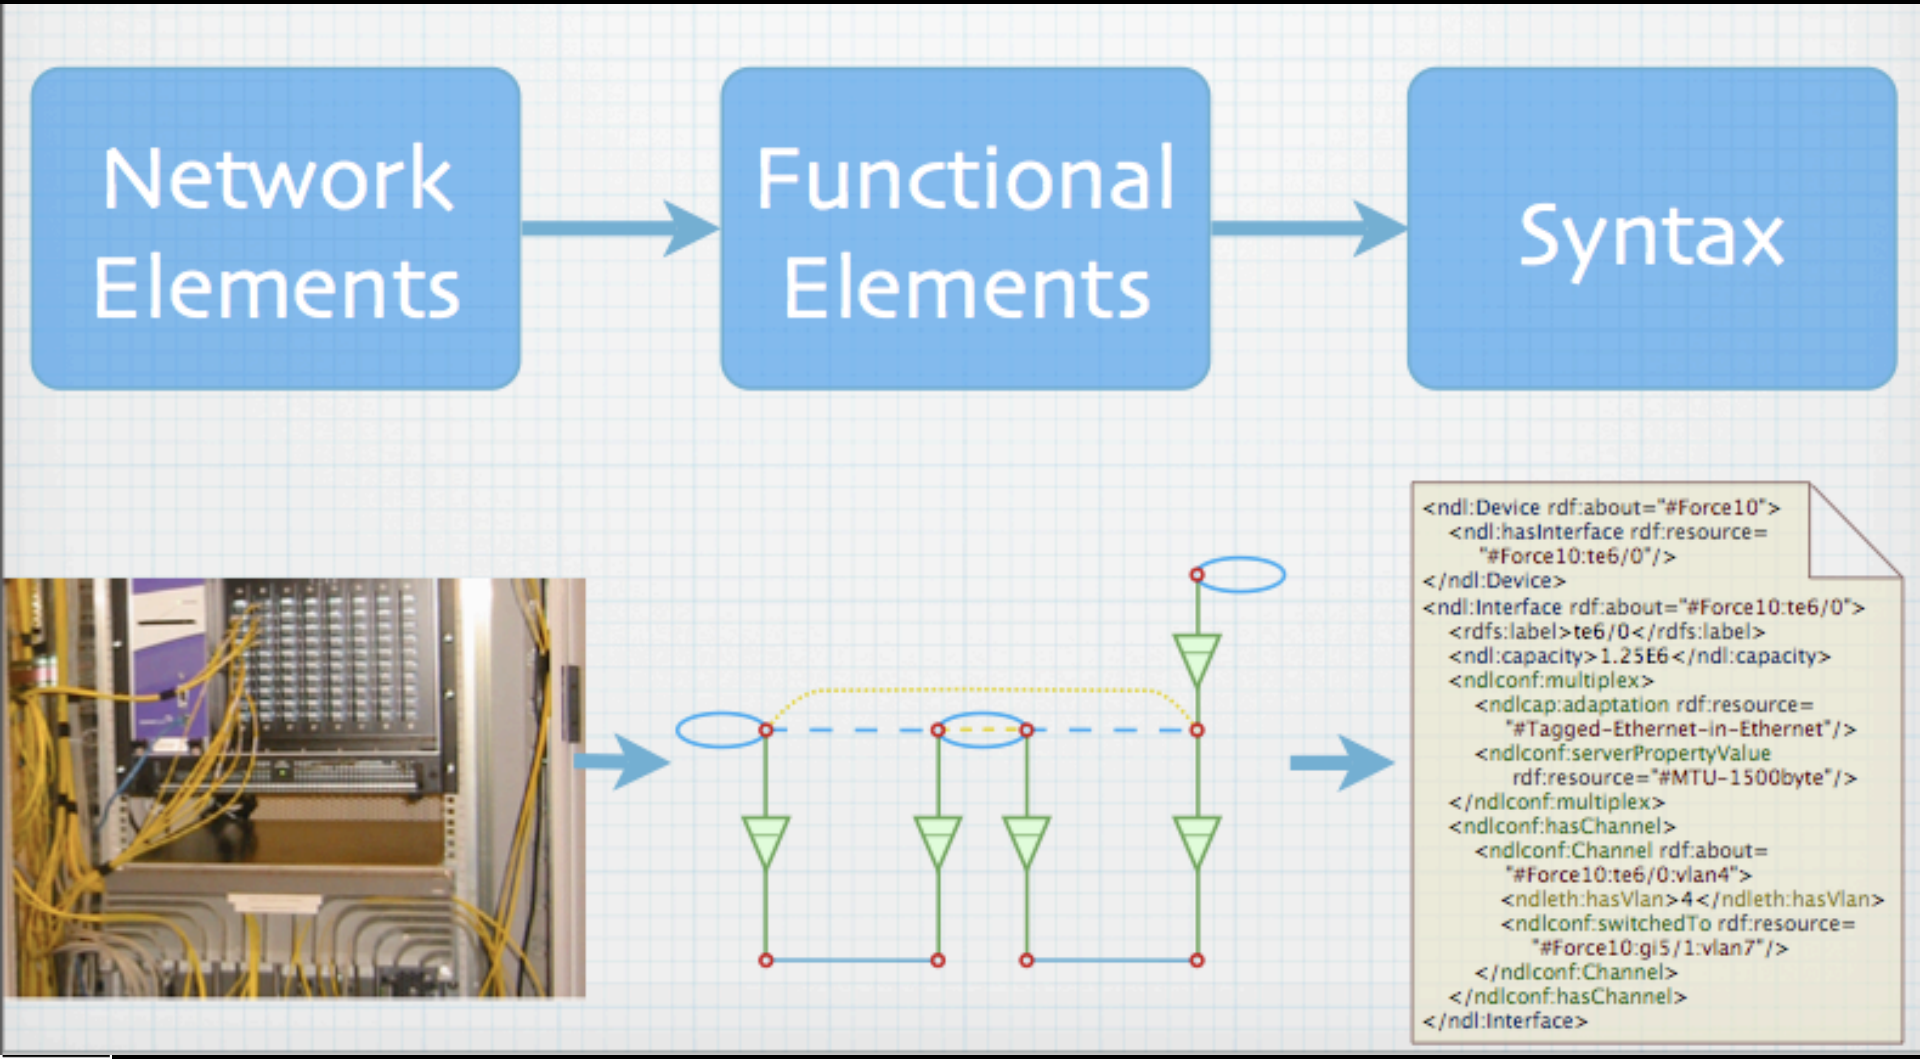

Multi-layer descriptions in NDL

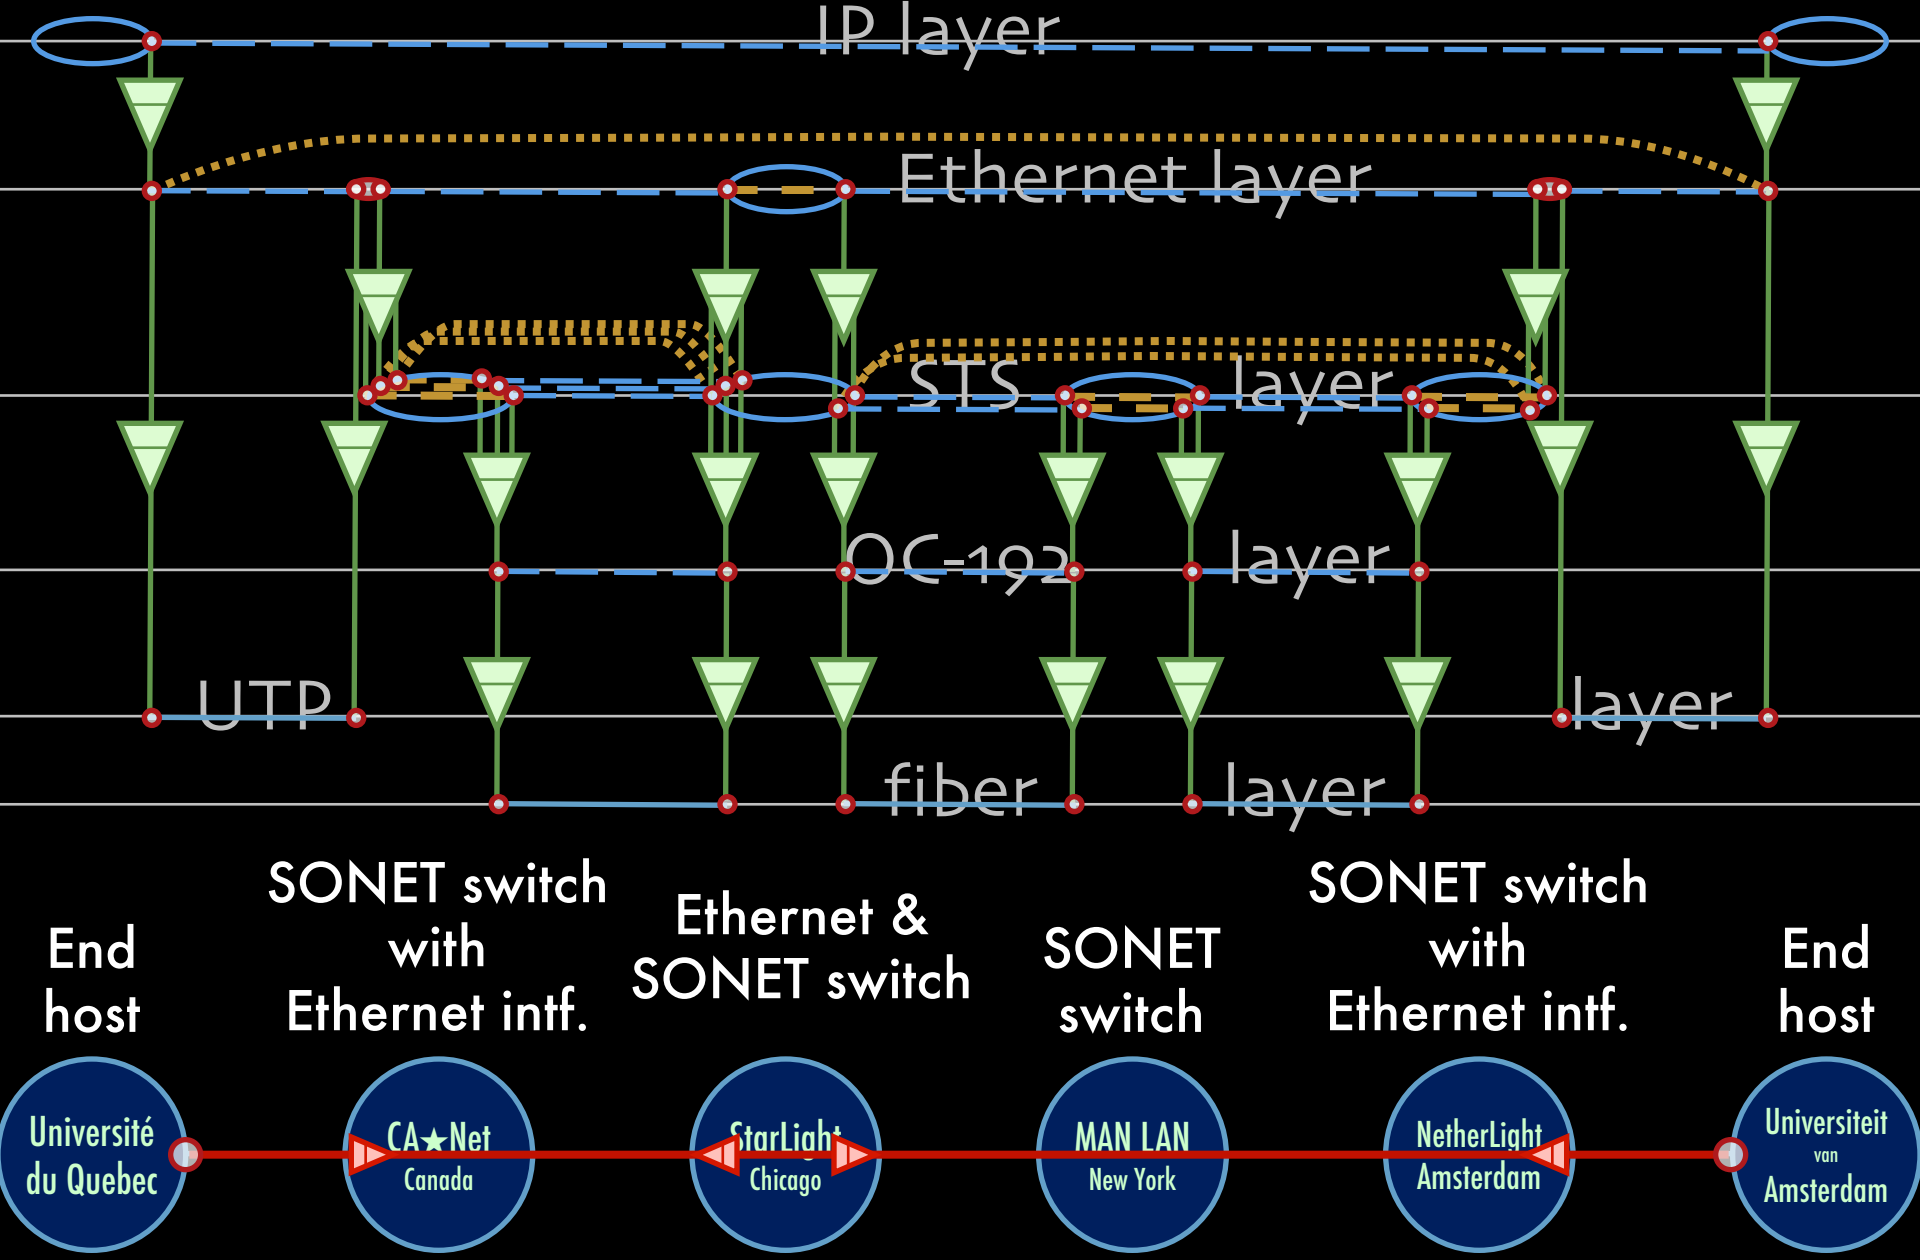

NML
OGF spec
iNDL

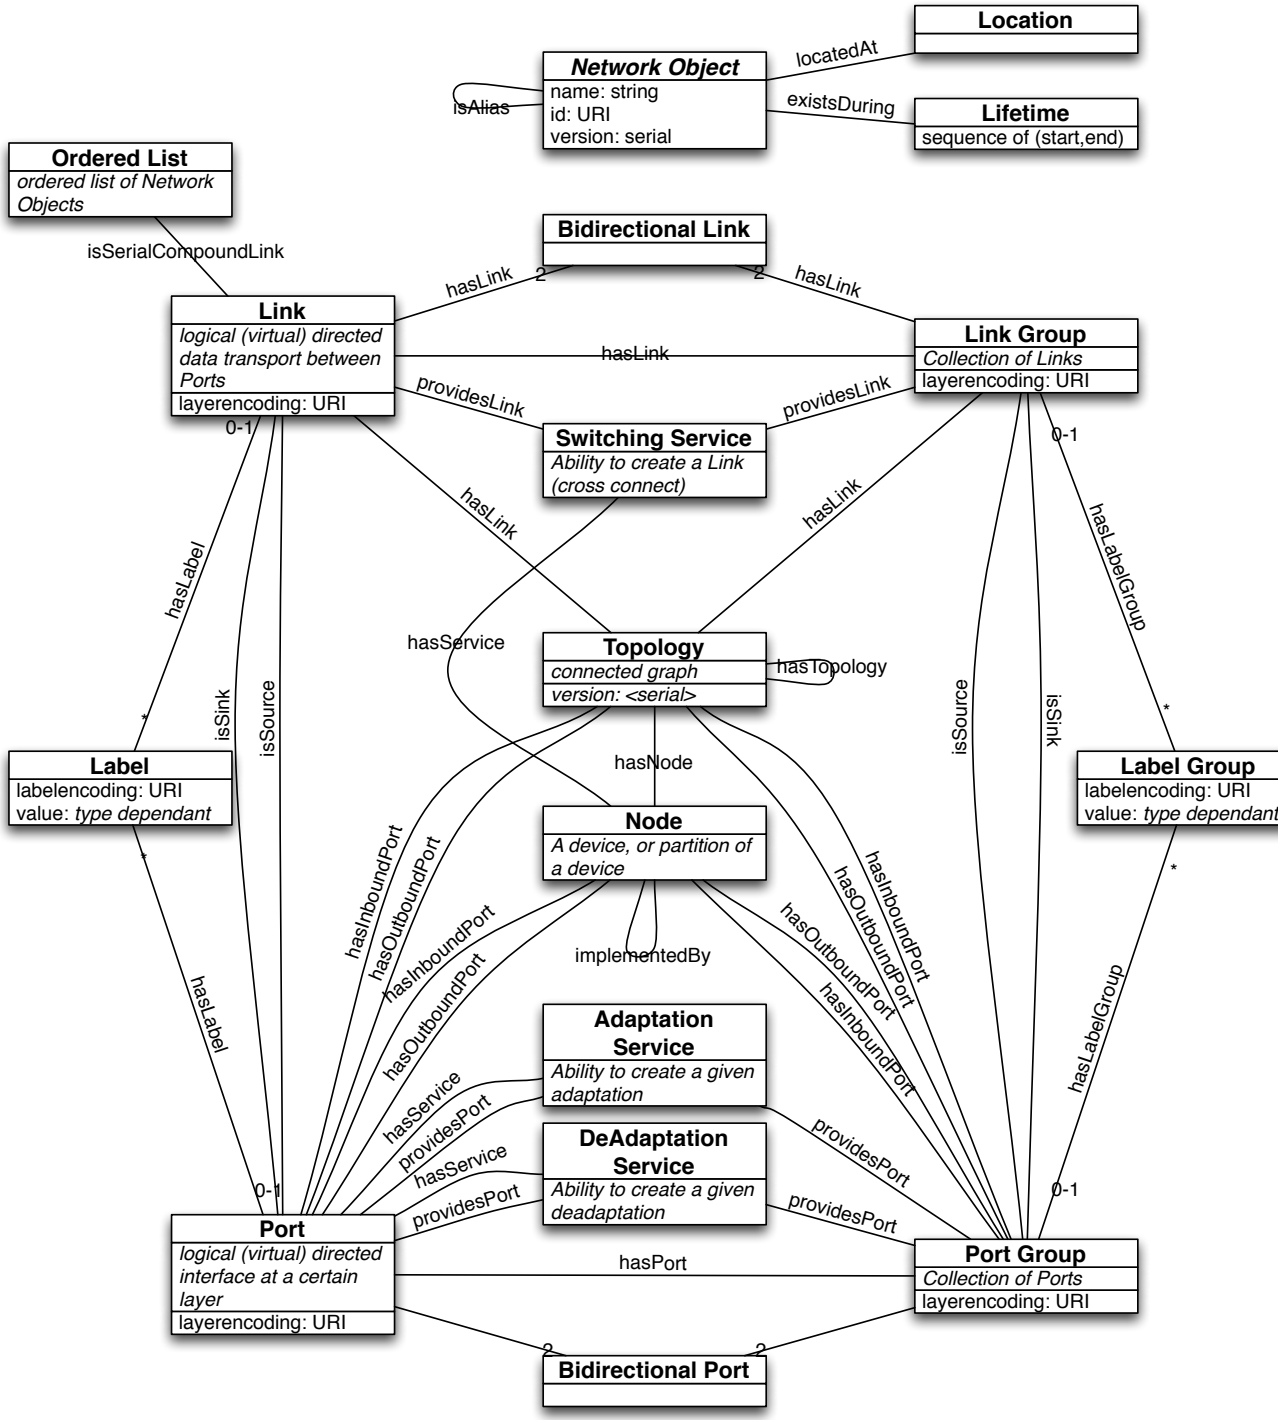

Network Topology Description

Network topology research supporting automatic network provisioning

- Inter-domain networks
- Multiple technologies
- Based on incomplete information
- Possibly linked to other resources

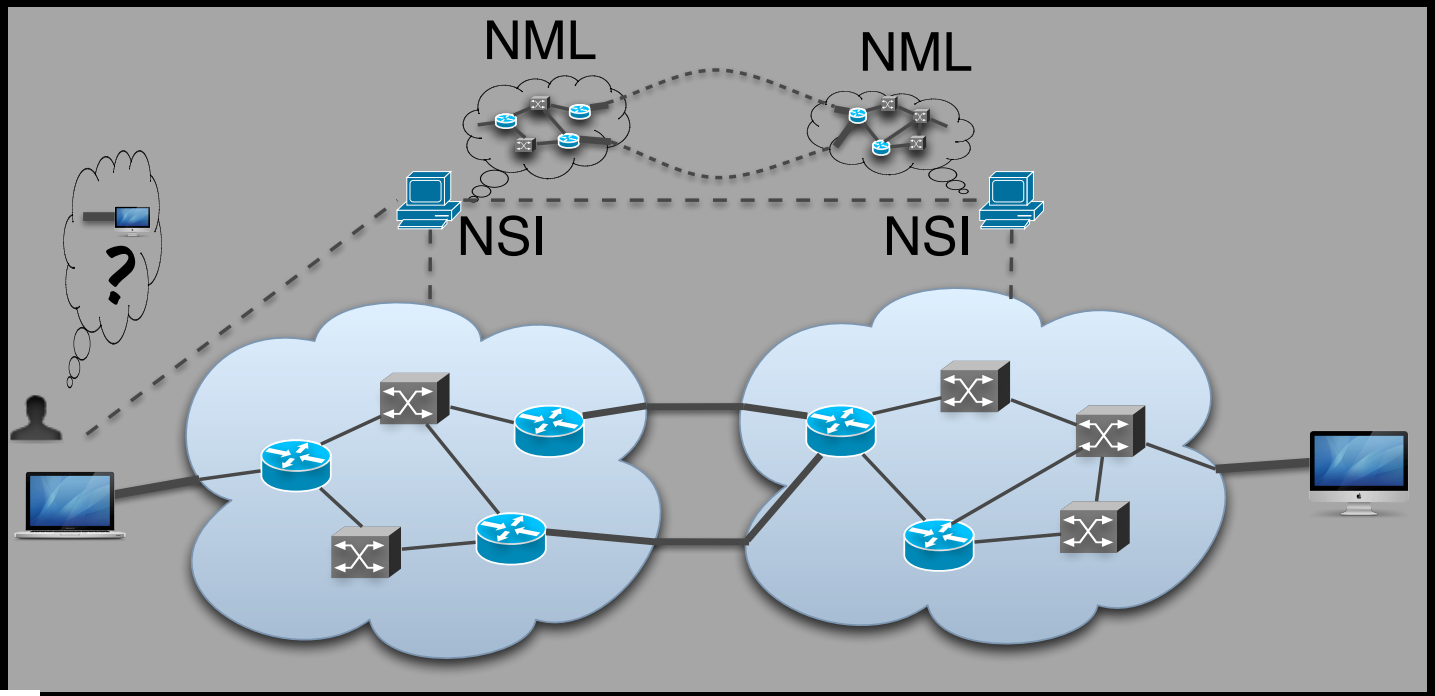

OpenGridForum
OPEN FORUM | OPEN STANDARDS

http://redmine.ogf.org/projects/nml-wg
http://redmine.ogf.org/projects/nsi-wg

http://sne.science.uva.nl/ndl

GLIF 2013 in NML

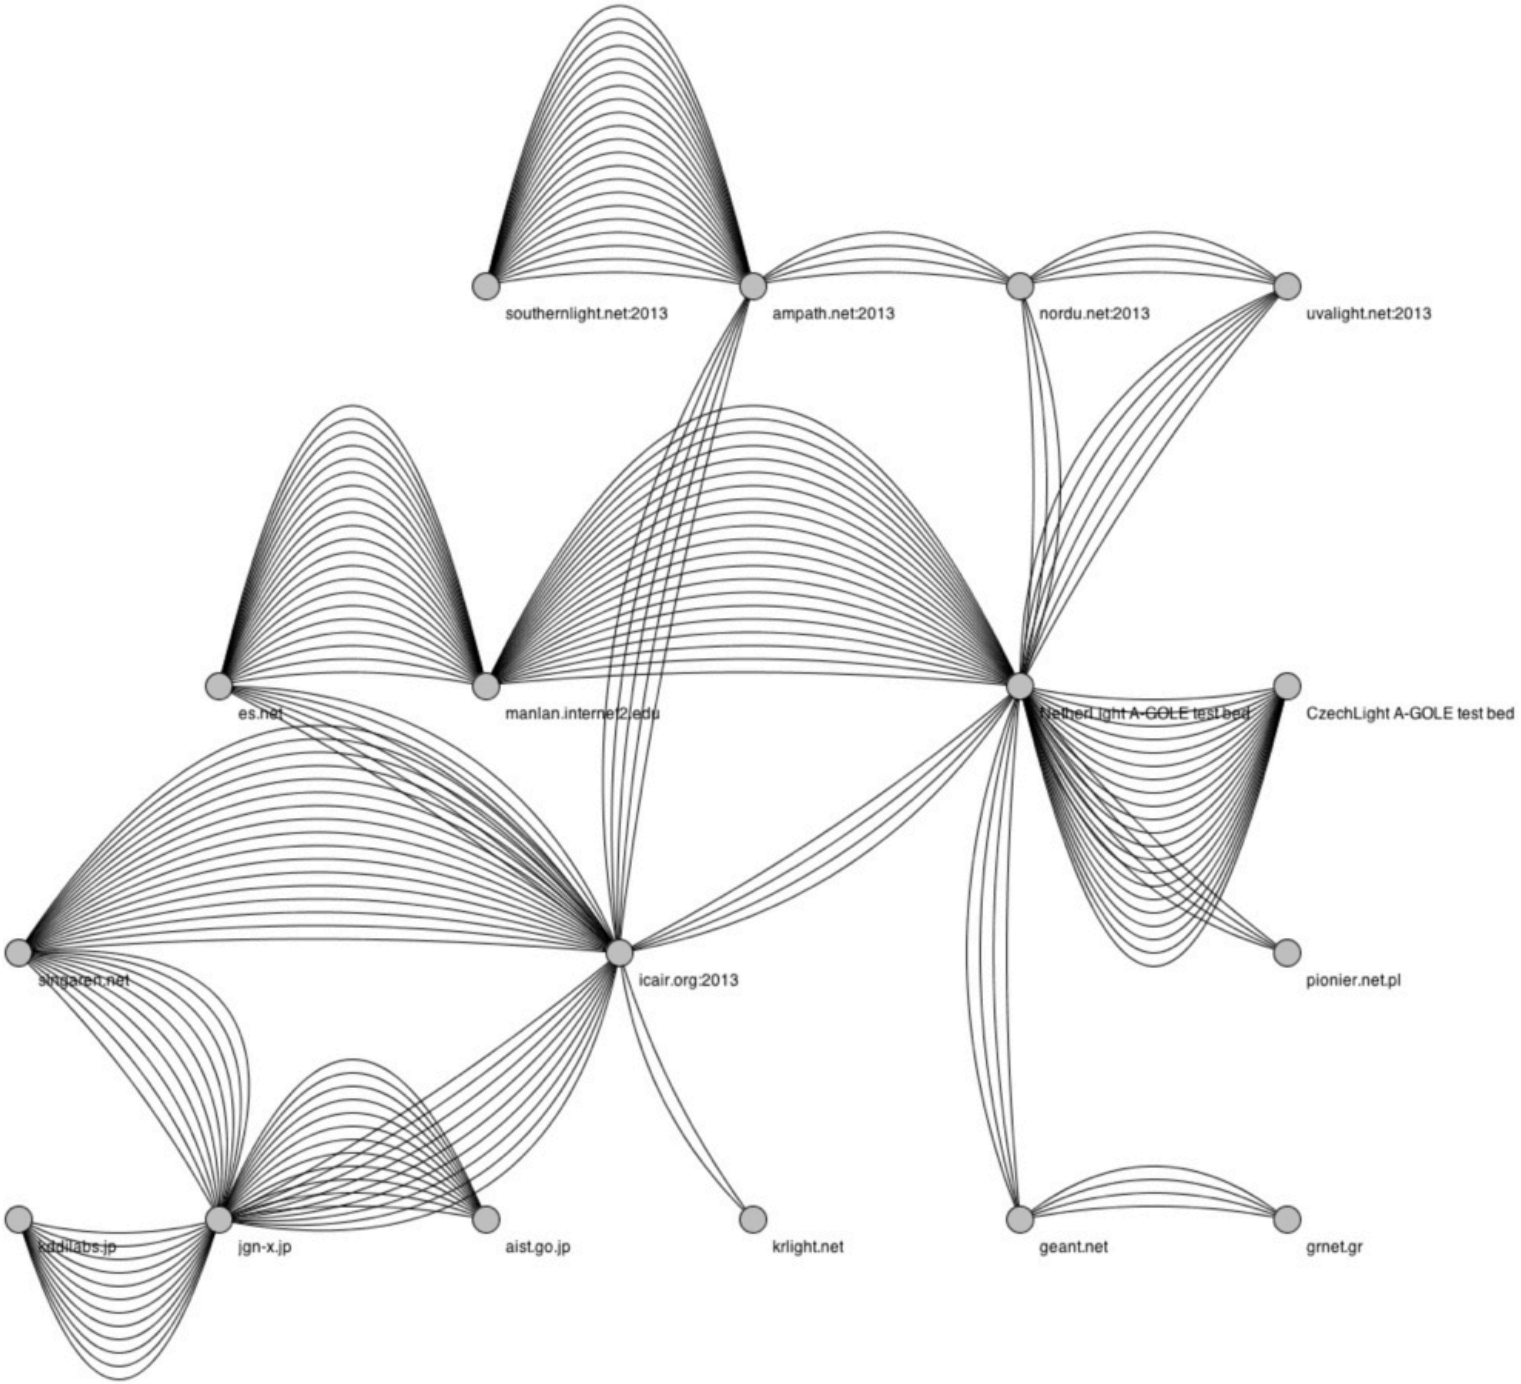

CdL

Applications and Networks become aware of each other!

CineGrid Description Language

CineGrid is an initiative to facilitate the exchange, storage and display of high-quality digital media.

The CineGrid Description Language (CDL) describes CineGrid resources. Streaming, display and storage components are organized in a hierarchical way.

CDL has bindings to the NDL ontology that enables descriptions of network components and their interconnections.

With CDL we can reason on the CineGrid infrastructure and its services.

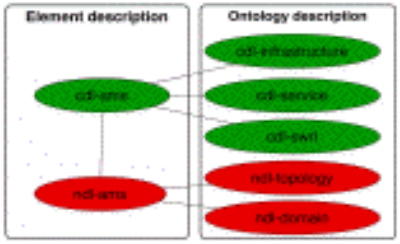

UML representation of CDL

SQWRL is used to query the Ontology.

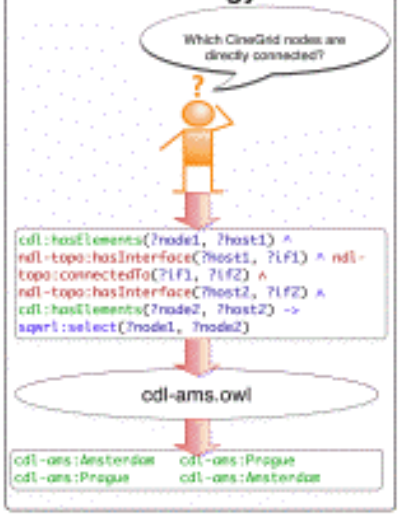

CDL links to ***NDL*** using the ***owl:SameAs*** property. ***CDL*** defines the services, ***NDL*** the network interfaces and links. The combination of the two ontologies identifies the host pairs that support matching services via existing network connections.

Information Modeling

Define a common information model for ***infrastructures*** and ***services***.
Base it on Semantic Web.

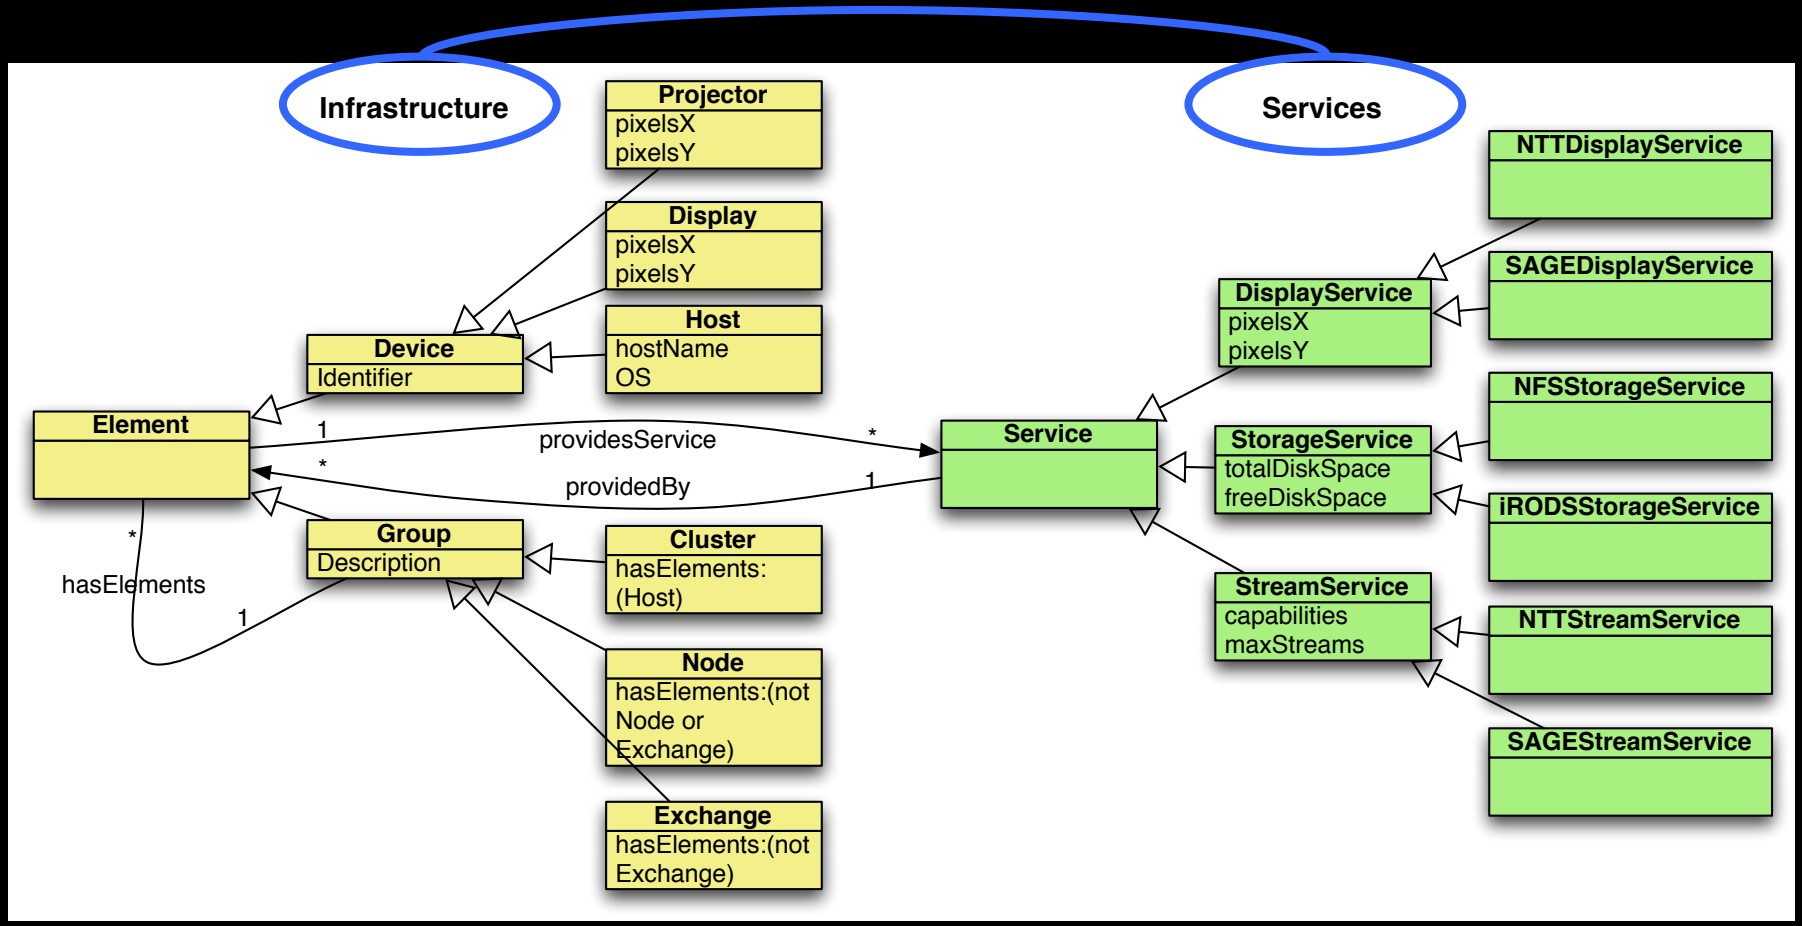

J. van der Ham, F. Dijkstra, P. Grosso, R. van der Pol, A. Toonk, C. de Laat
A distributed topology information system for optical networks based on the semantic web, Elsevier Journal on Optical Switching and Networking, Volume 5, Issues 2-3, June 2008, Pages 85-93

R.Koning, P.Grosso and C.de Laat
Using ontologies for resource description in the CineGrid Exchange
In: Future Generation Computer Systems (2010)

Envisioned role of the SPG: define slice archetypes?

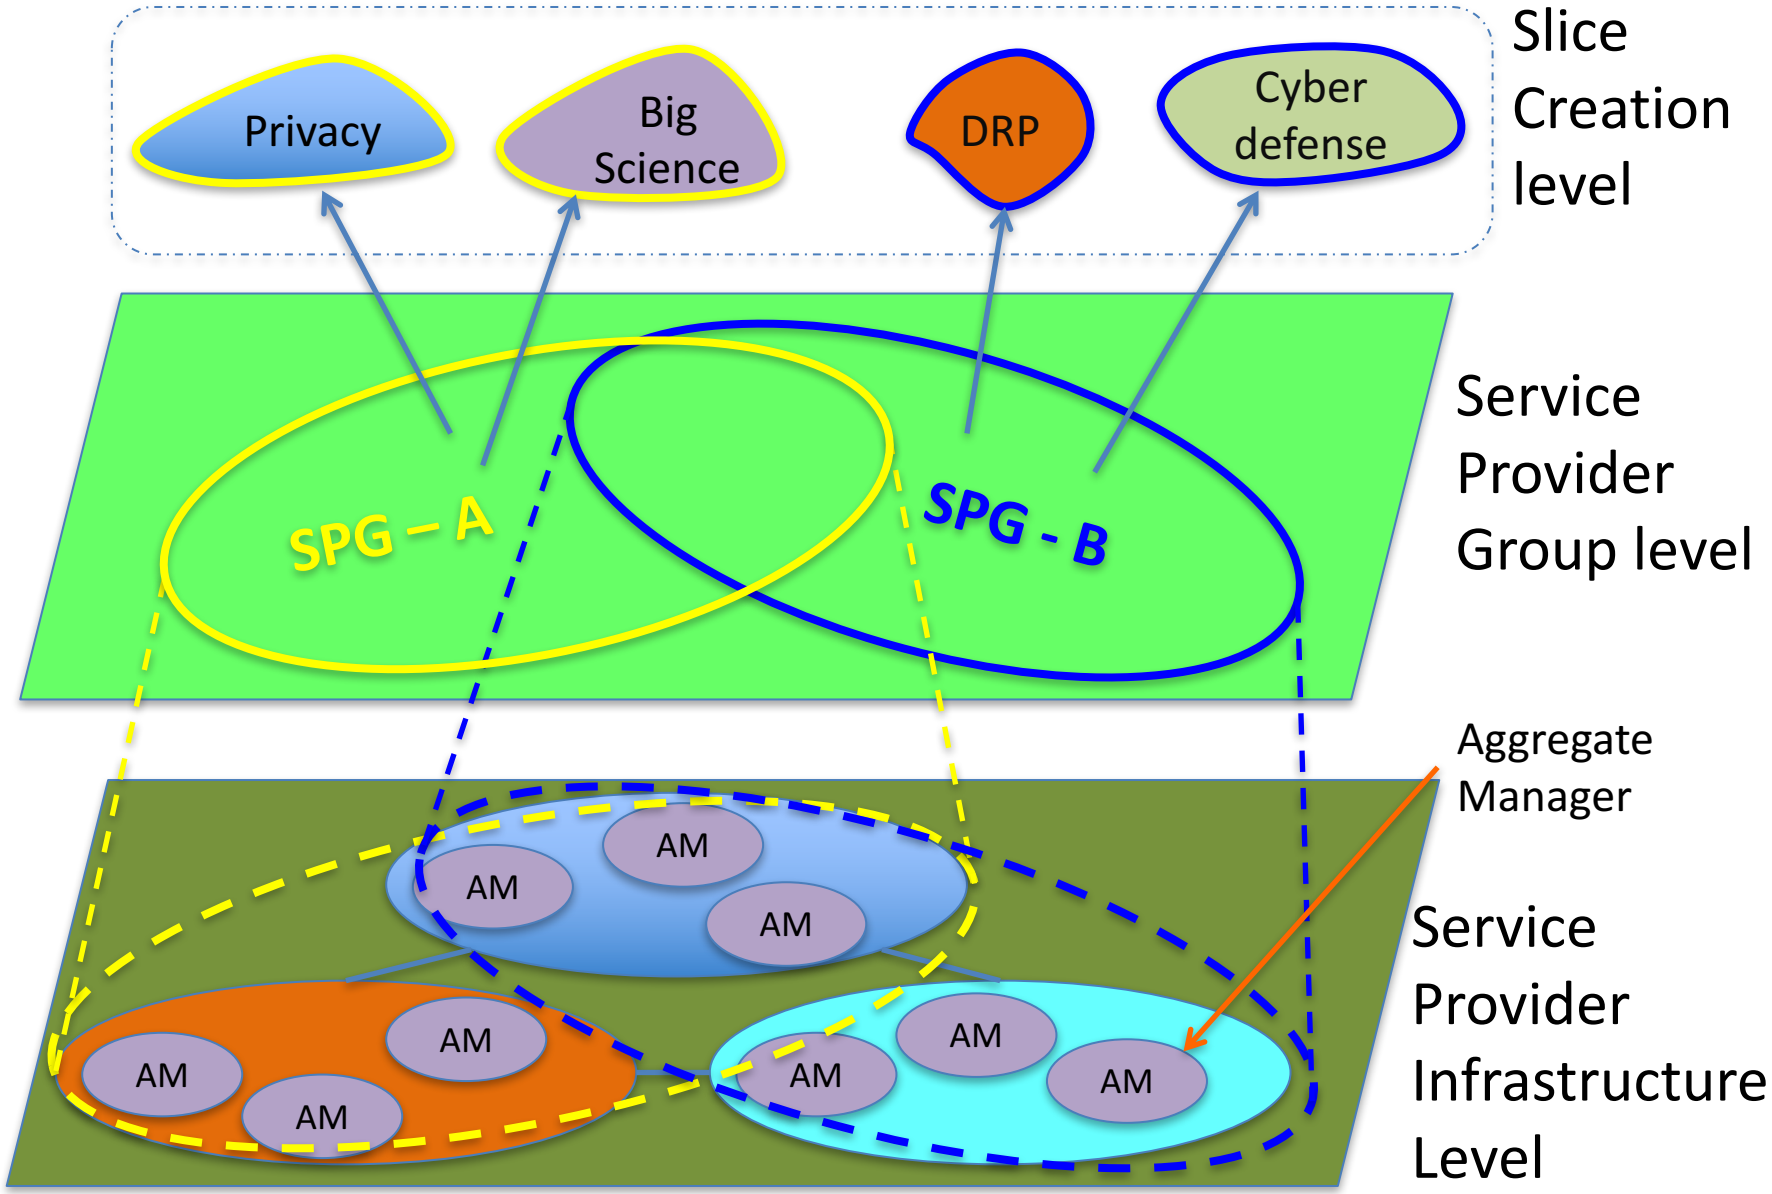

SNE - Mission

Can we create smart and safe data processing systems that can be tailored to diverse application needs?

- *Capacity*
  - *Bandwidth on demand, QoS, architectures, photonics, performance*
- ***Capability***
  - ***Programmability, virtualization, complexity, semantics, workflows***
- ***Security***
  - ***Policy, Trust, Anonymity, Privacy, Integrity***
- *Sustainability*
  - *Greening infrastructure, Awareness*
- ***Resilience***
  - ***Failures, Disasters, Systems under attack***

SARNET: Security Autonomous Response with programmable NETworks

Cees de Laat
Leon Gommans, Rodney Wilson, Rob Meijer
Tom van Engers, Marc Lyonais, Paola Grosso, Frans Franken,
Ameneh Deljoo, Ralph Koning, Ben de Graaff, Stojan Trajanovski, Gleb Polevoy

UNIVERSITY OF AMSTERDAM

Cyber security program

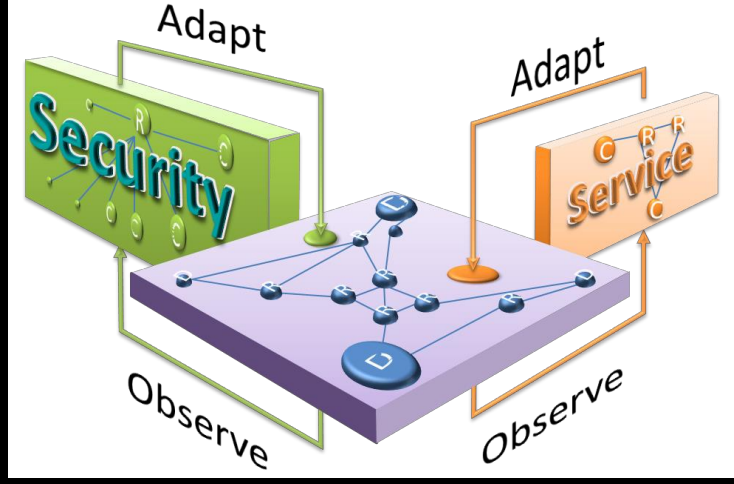

Research goal is to obtain the knowledge to create ICT systems that:

- model their state (situation)
- discover by observations and reasoning if and how an attack is developing and calculate the associated risks
- have the knowledge to calculate the effect of counter measures on states and their risks
- choose and execute one.

In short, we research the concept of networked computer infrastructures exhibiting SAR: Security Autonomous Response.

Context & Goal

Security Autonomous Response NETwork Research

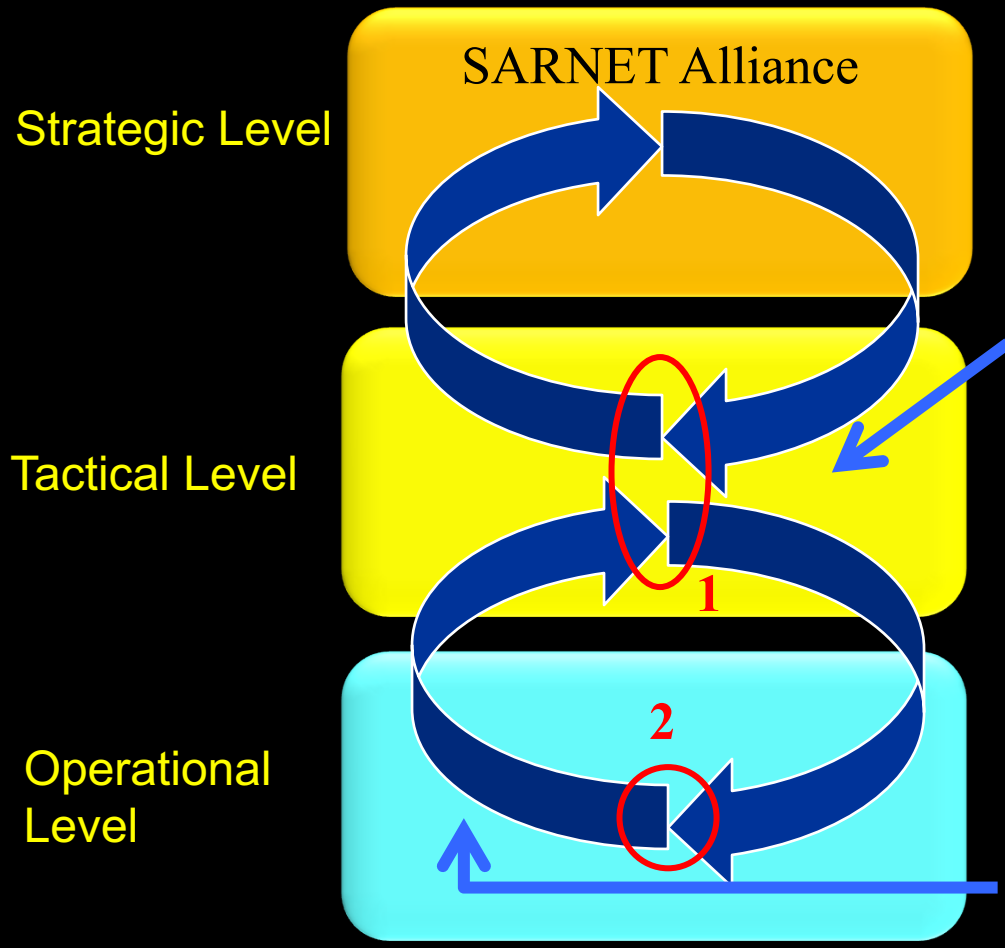

SARNET

Ameneh Deljoo (PhD):
Why create SARNET Alliances?
Model autonomous SARNET behaviors to identify risk and benefits for SARNET stakeholders

Stojan Trajanovski (PD):
Determine best defense scenario against cyberattacks deploying SARNET functions (1) based on security state and KPI information (2).

Ralph Koning (PhD)
Ben de Graaff (SP):
1. Design functionalities needed to operate a SARNET using SDN/NFV
2: deliver security state and KPI information (e.g cost)

Status SARNET Operational Level

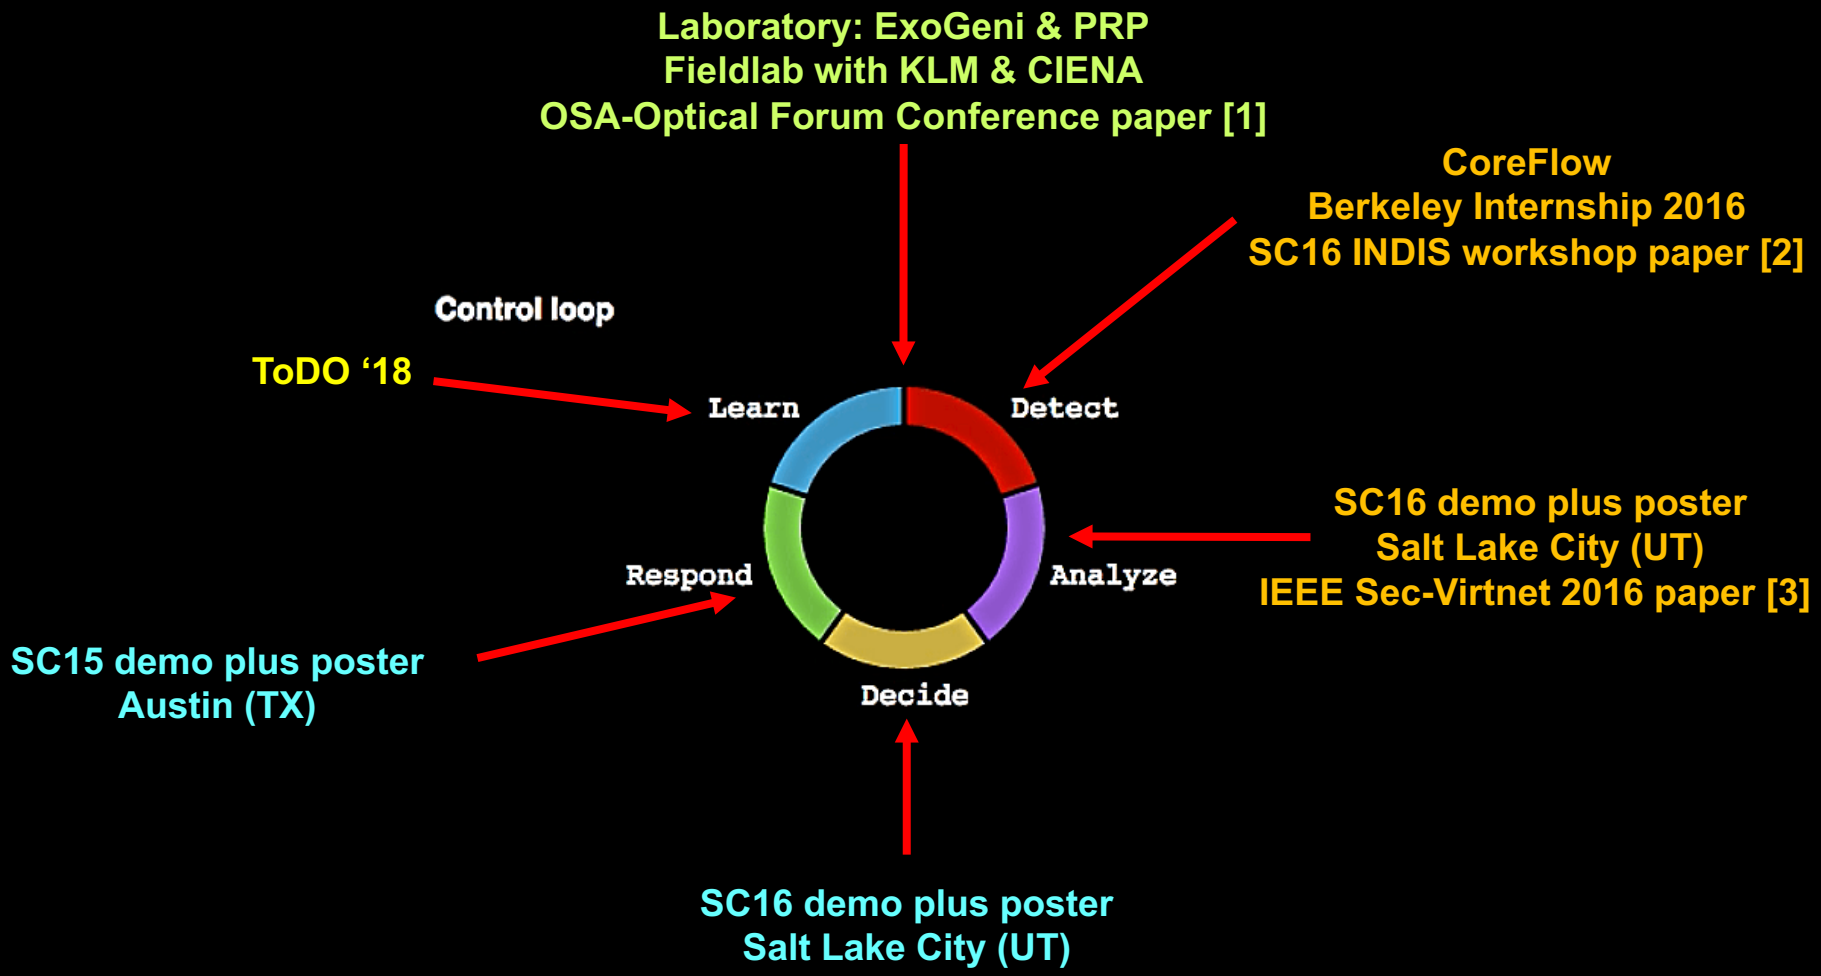

1. Paper: R. Koning, A. Deljoo, S. Trajanovski, B. de Graaff, P. Grosso, L. Gommans, T. van Engers, F. Fransen, R. Meijer, R. Wilson, and C. de Laat, "Enabling E-Science Applications with Dynamic Optical Networks: Secure Autonomous Response Networks ", OSA Optical Fiber Communication Conference and Exposition, 19-23 March 2017, Los Angeles, California.
2. Paper: Ralph Koning, Nick Buraglio, Cees de Laat, Paola Grosso, "CoreFlow: Enriching Bro security events using network traffic monitoring data", SC16 Salt Lake City, INDIS workshop, Nov 13, 2016.
3. Paper: Ralph Koning, Ben de Graaff, Cees de Laat, Robert Meijer, Paola Grosso, "Analysis of Software Defined Networking defences against Distributed Denial of Service attacks", The IEEE International Workshop on Security in Virtualized Networks (Sec-VirtNet 2016) at the 2nd IEEE International Conference on Network Softwarization (NetSoft 2016), Seoul Korea, June 10, 2016.

SC16 DEMO STARNET Operational Level

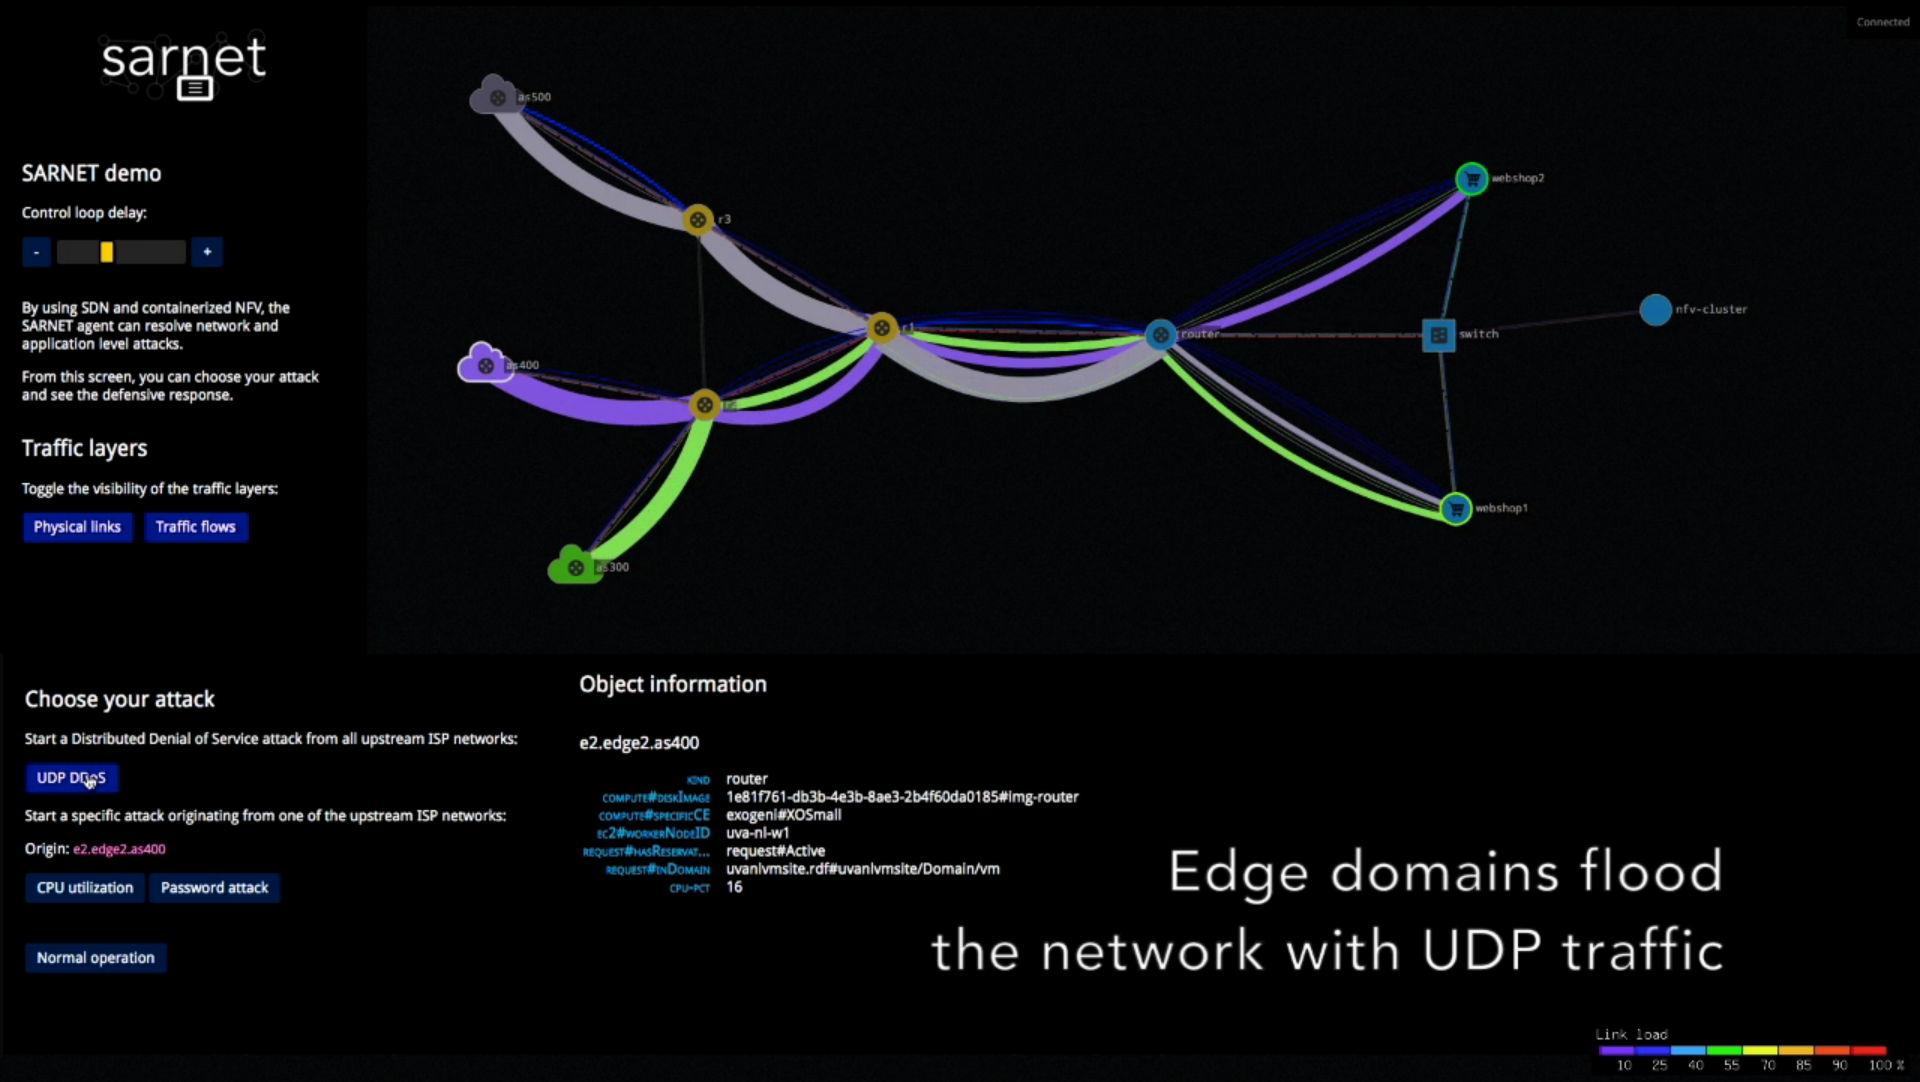

SC16 DEMO STARNET Operational Level

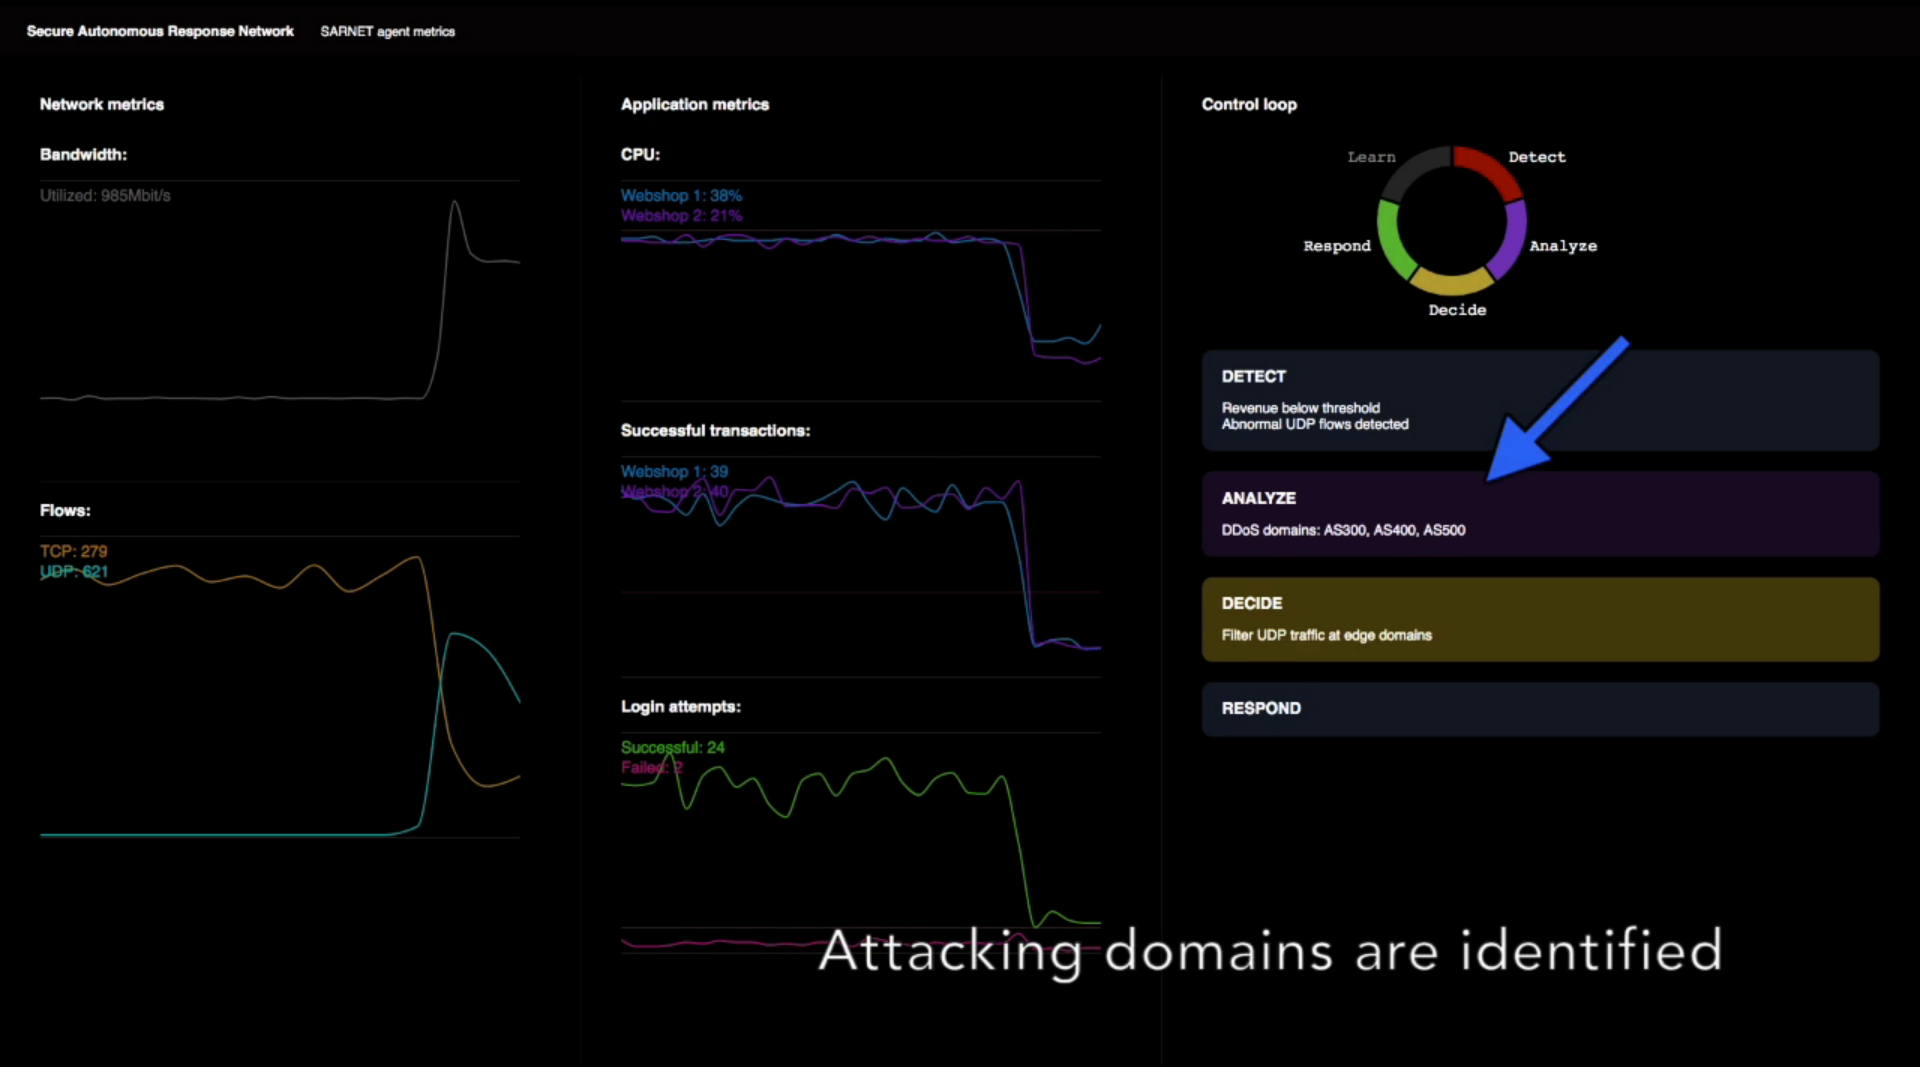

Attacking domains are identified

SC16 DEMO STARNET Operational Level

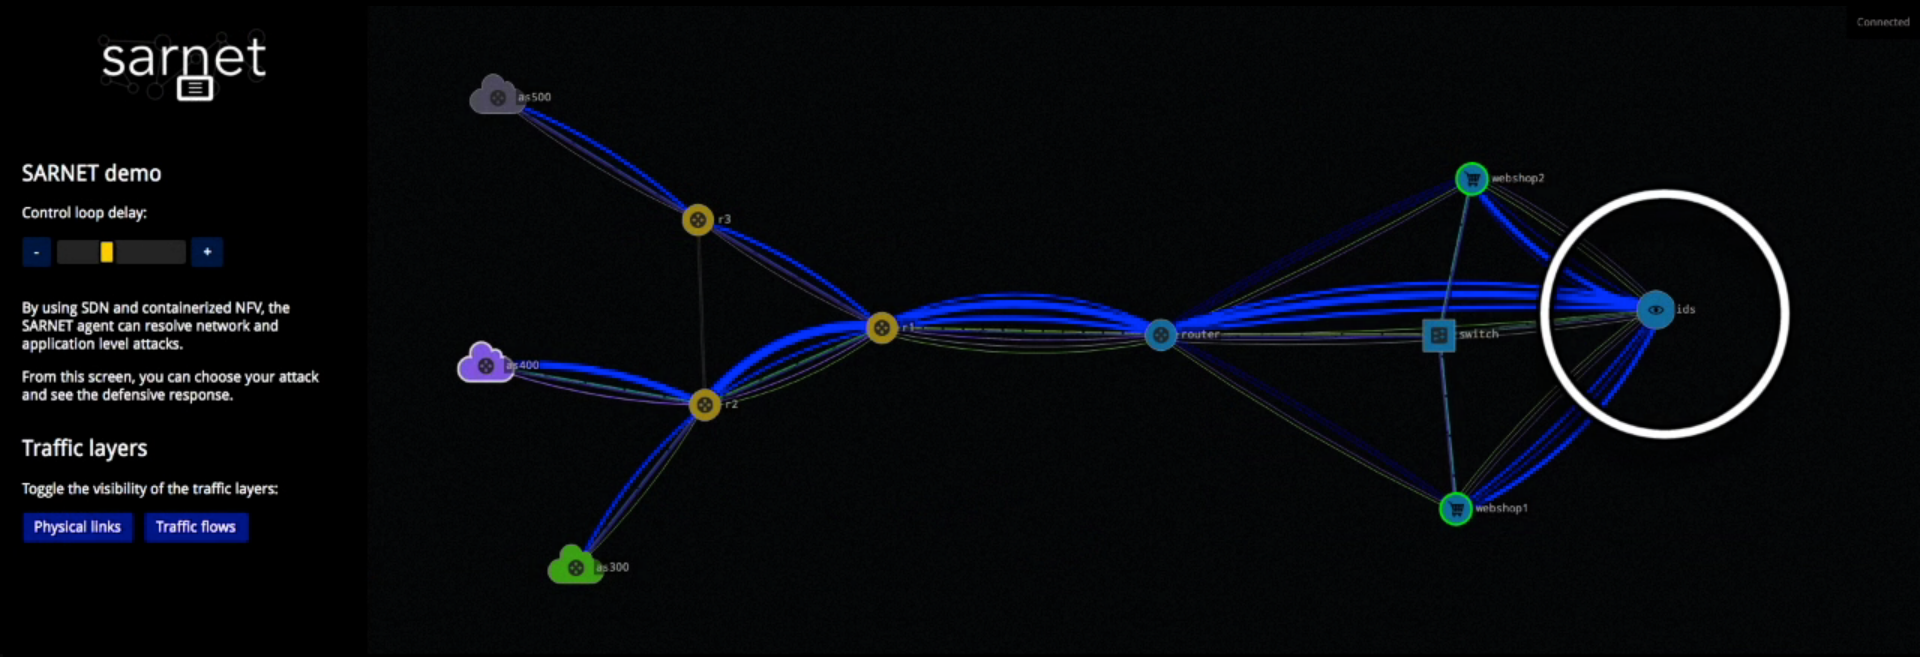

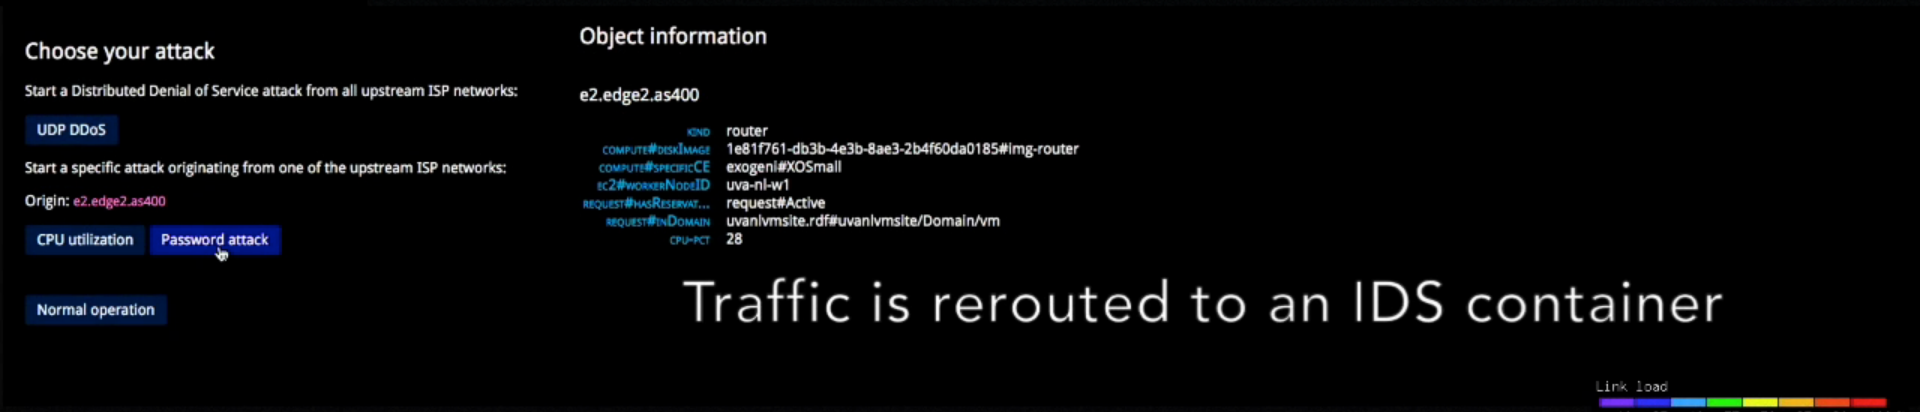

SC16 DEMO STARNET Operational Level

Mission

Can we create smart and safe data processing infrastructures that can be tailored to diverse application needs?

- *Capacity*
  - *Bandwidth on demand, QoS, architectures, photonics, performance*
- ***Capability***
  - ***Programmability, virtualization, complexity, semantics, workflows***
- *Security*
  - *Anonymity, integrity of data in distributed data processing*
- *Sustainability*
  - *Greening infrastructure, awareness*
- ***Resilience***
  - ***Systems under attack, failures, disasters***

Software Defined Networking

- What constitutes a Tb/s network?
- think back to teraflop computing!
  - MPI turns a room full of pc's in a teraflop machine
- massive parallel channels in hosts, NIC's
- TeraApps programming model supported by
  - TFlops -> MPI / Globus / Cloud
  - TBytes -> DAIS / MONETdb …
  - TPixels -> SAGE
  - TSensors -> LOFAR, LHC, LOOKING, CineGrid, ...
  - Tbit/s -> OpenFlow & SDN
  - -> Virtualized Programmable Networks

User Programmable Virtualized Networks allows the results of decades of computer science to handle the complexities of application specific networking.

- The network is virtualized as a collection of resources
- UPVNs enable network resources to be programmed as part of the application
- Mathematica, a powerful mathematical software system, can interact with real networks using UPVNs

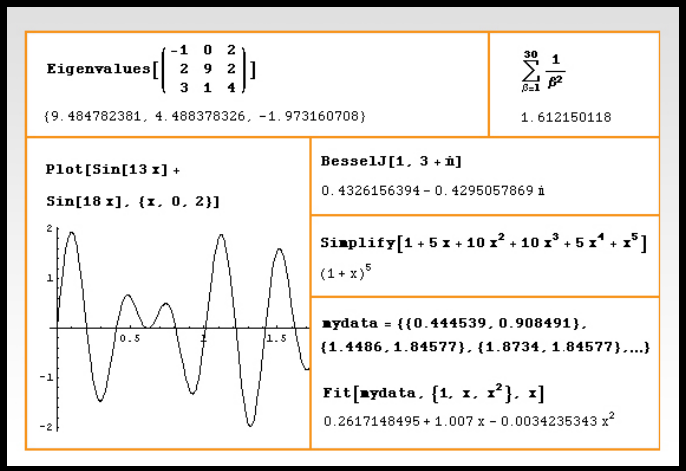

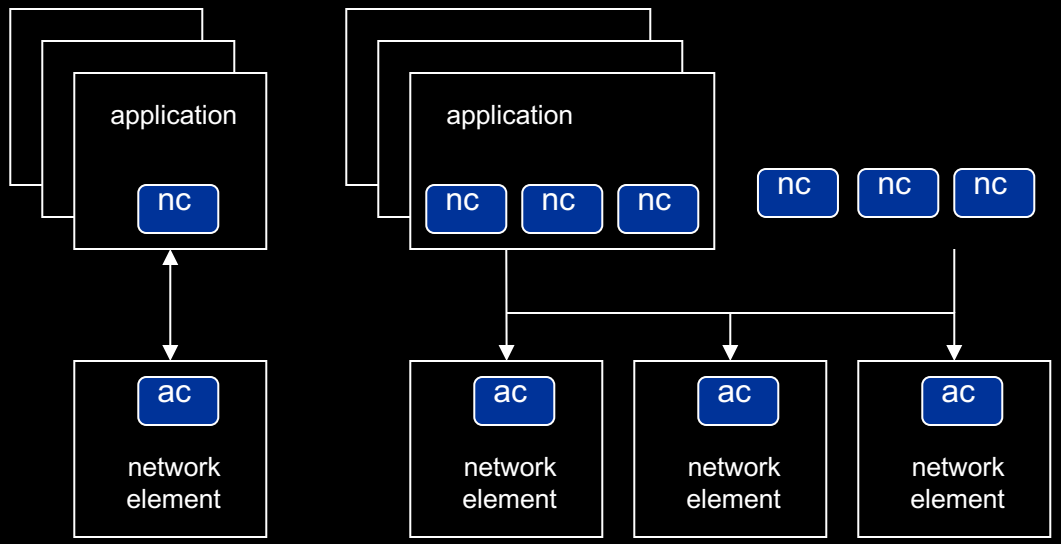

StarPlane

Mathematica enables advanced graph queries, visualizations and real-time network manipulations on UPVNs

Topology matters can be dealt with algorithmically
Results can be persisted using a transaction service built in UPVN

Initialization and BFS discovery of NEs

```
Needs["WebServices`"]
<<DiscreteMath`Combinatorica`
<<DiscreteMath`GraphPlot`
InitNetworkTopologyService["edge.ict.tno.nl"]

Available methods:

{DiscoverNetworkElements,GetLinkBandwidth,GetAllIpLinks,Remote,
NetworkTokenTransaction}

Global`upvnverbose = True;

AbsoluteTiming[nes = BFSDiscover["139.63.145.94"];][[1]]

AbsoluteTiming[result = BFSDiscoverLinks["139.63.145.94", nes];][[1]]

Getting neigbours of: 139.63.145.94
Internal links: {192.168.0.1, 139.63.145.94}
(...)
Getting neigbours of:192.168.2.3

Internal links: {192.168.2.3}
```

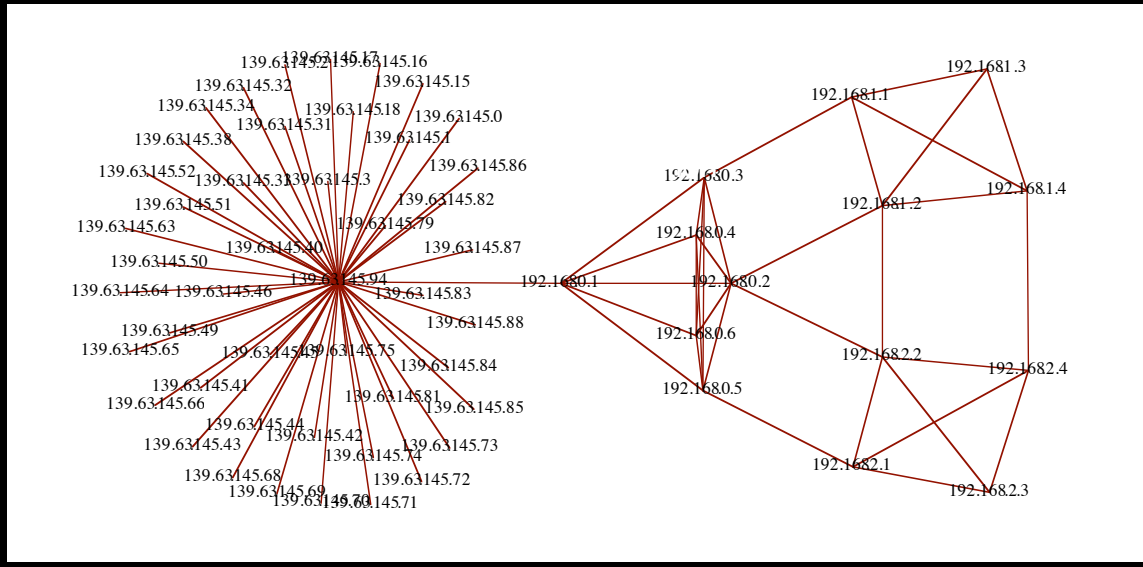

Transaction on shortest path with tokens

```
nodePath = ConvertIndicesToNodes[
                ShortestPath[     g,
Node2Index[nids,"192.168.3.4"],
Node2Index[nids,"139.63.77.49"]],
                                nids];
                Print["Path: ", nodePath];
If[NetworkTokenTransaction[nodePath, "green"]==True,
   Print["Committed"], Print["Transaction failed"]];

                                        Path:
{192.168.3.4,192.168.3.1,139.63.77.30,139.63.77.49}

                                        Committed
```

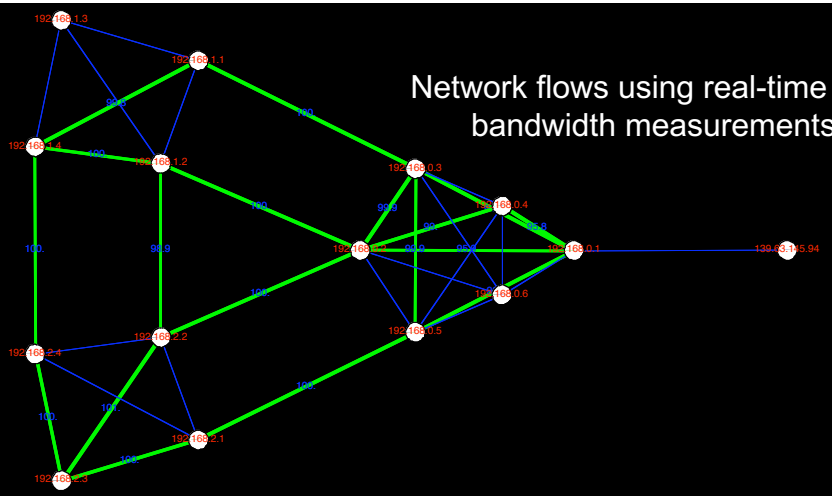

Network flows using real-time bandwidth measurements

ref: Robert J. Meijer, Rudolf J. Strijkers, Leon Gommans, Cees de Laat, User Programmable Virtualiized Networks, accepted for publication to the IEEE e-Science 2006 conference Amsterdam.

StarPlane

Basic operating system loop

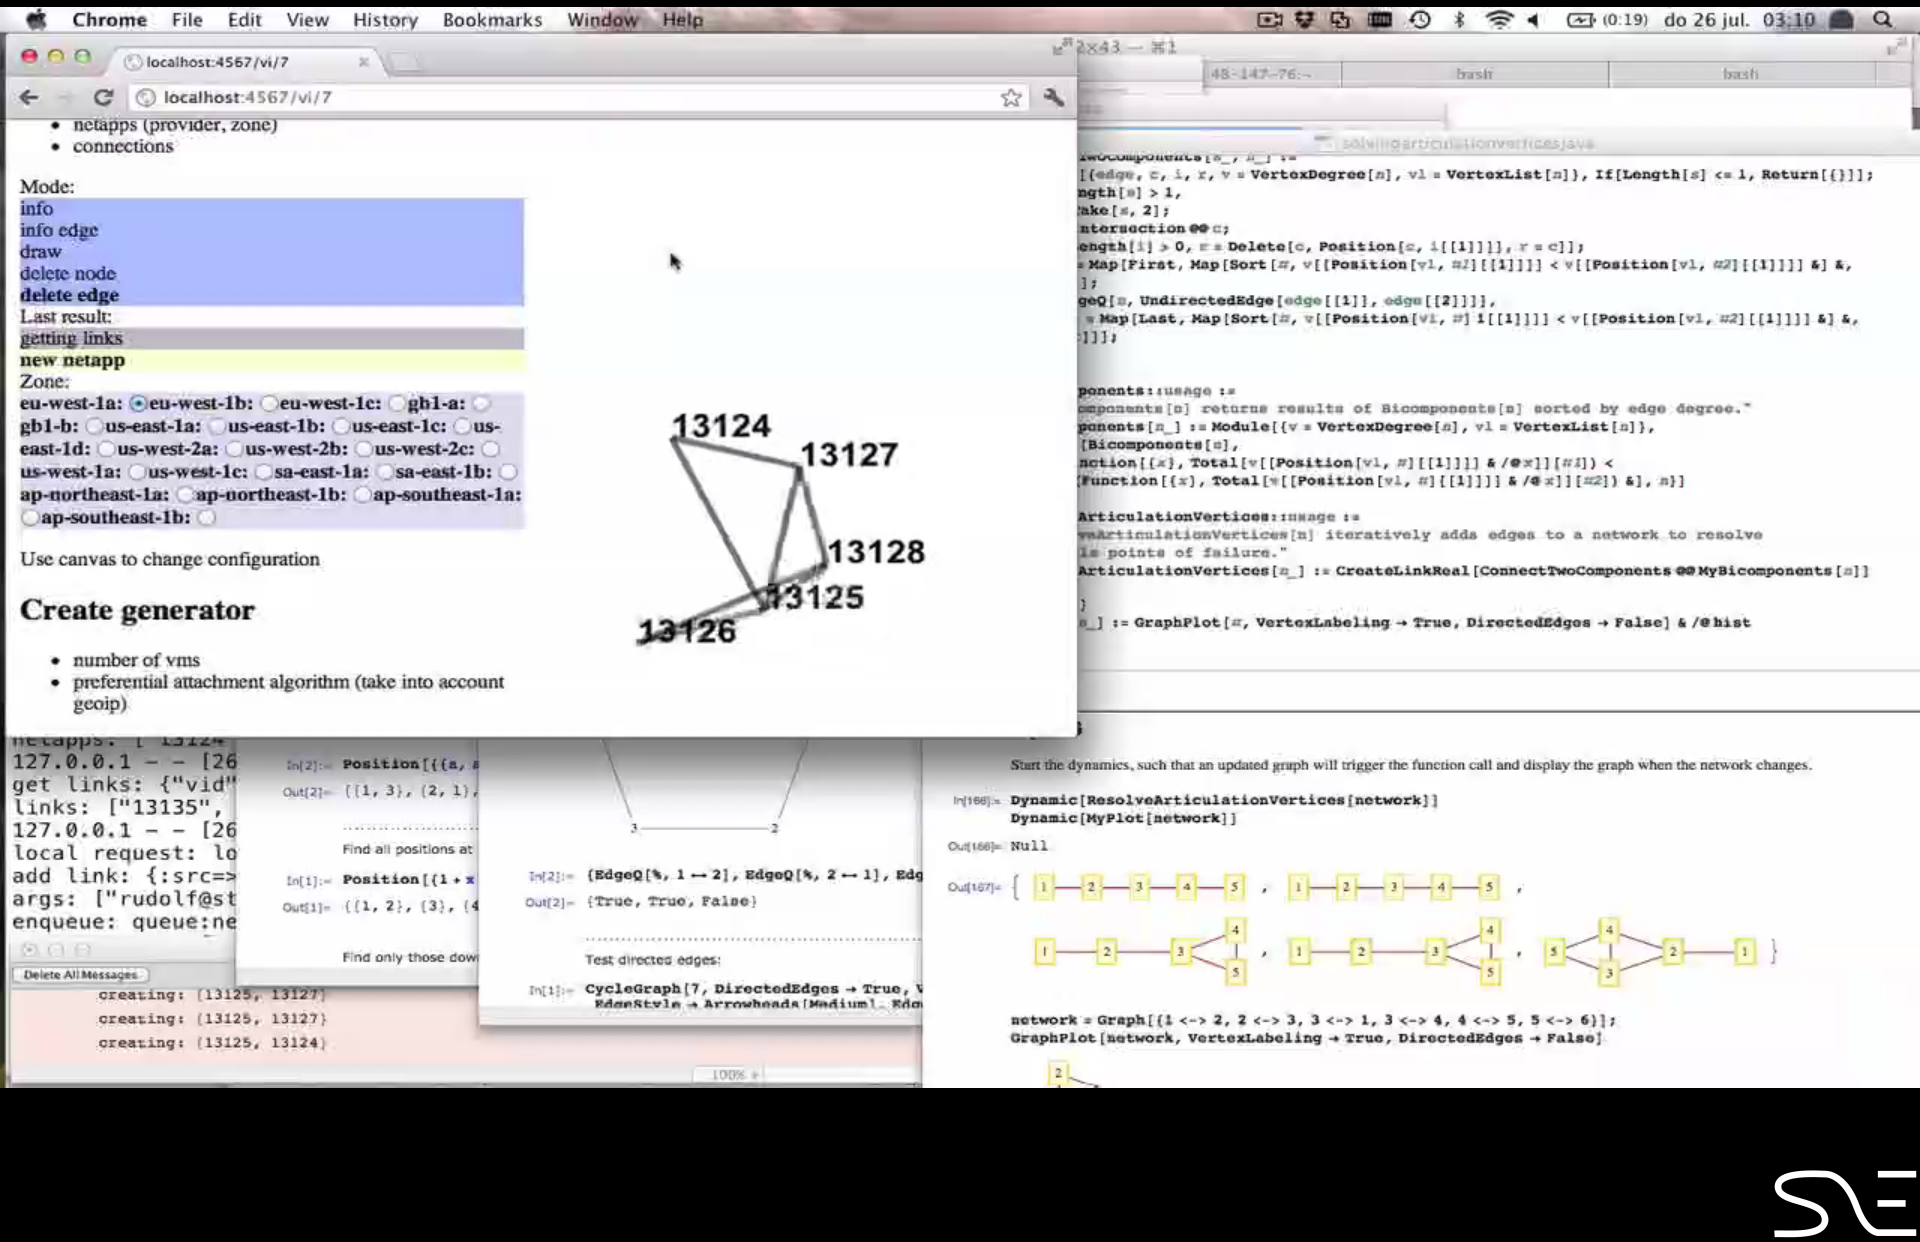

Main problem statement

- Organizations that normally compete have to bring data together to achieve a common goal!
- The shared data may be used for that goal but not for any other!
- Data may have to be processed in untrusted data centers.
  - How to enforce that using modern Cyber Infrastructure?
  - How to organize such alliances?
  - How to translate from strategic via tactical to operational level?
  - What are the different fundamental data infrastructure models to consider?

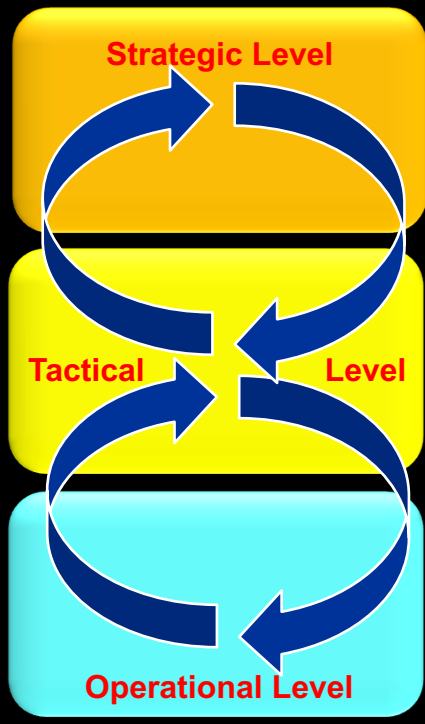

Big Data Sharing use cases placed in airline context

Global Scale

National Scale

City / regional Scale

Campus / Enterprise Scale

Aircraft Component Health Monitoring (Big) Data
NWO **CIMPLO project**
4.5 FTE

Cargo Logistics Data
(C1) DaL4LoD
(C2) Secure scalable policy-enforced distributed data Processing
(using blockchain)

NLIP iShare project

iSHARE
powered by NLIP

Cybersecurity Big Data
NWO COMMIT/
SARNET project
3.5 FTE

Ambition to put capabilities into fieldlab

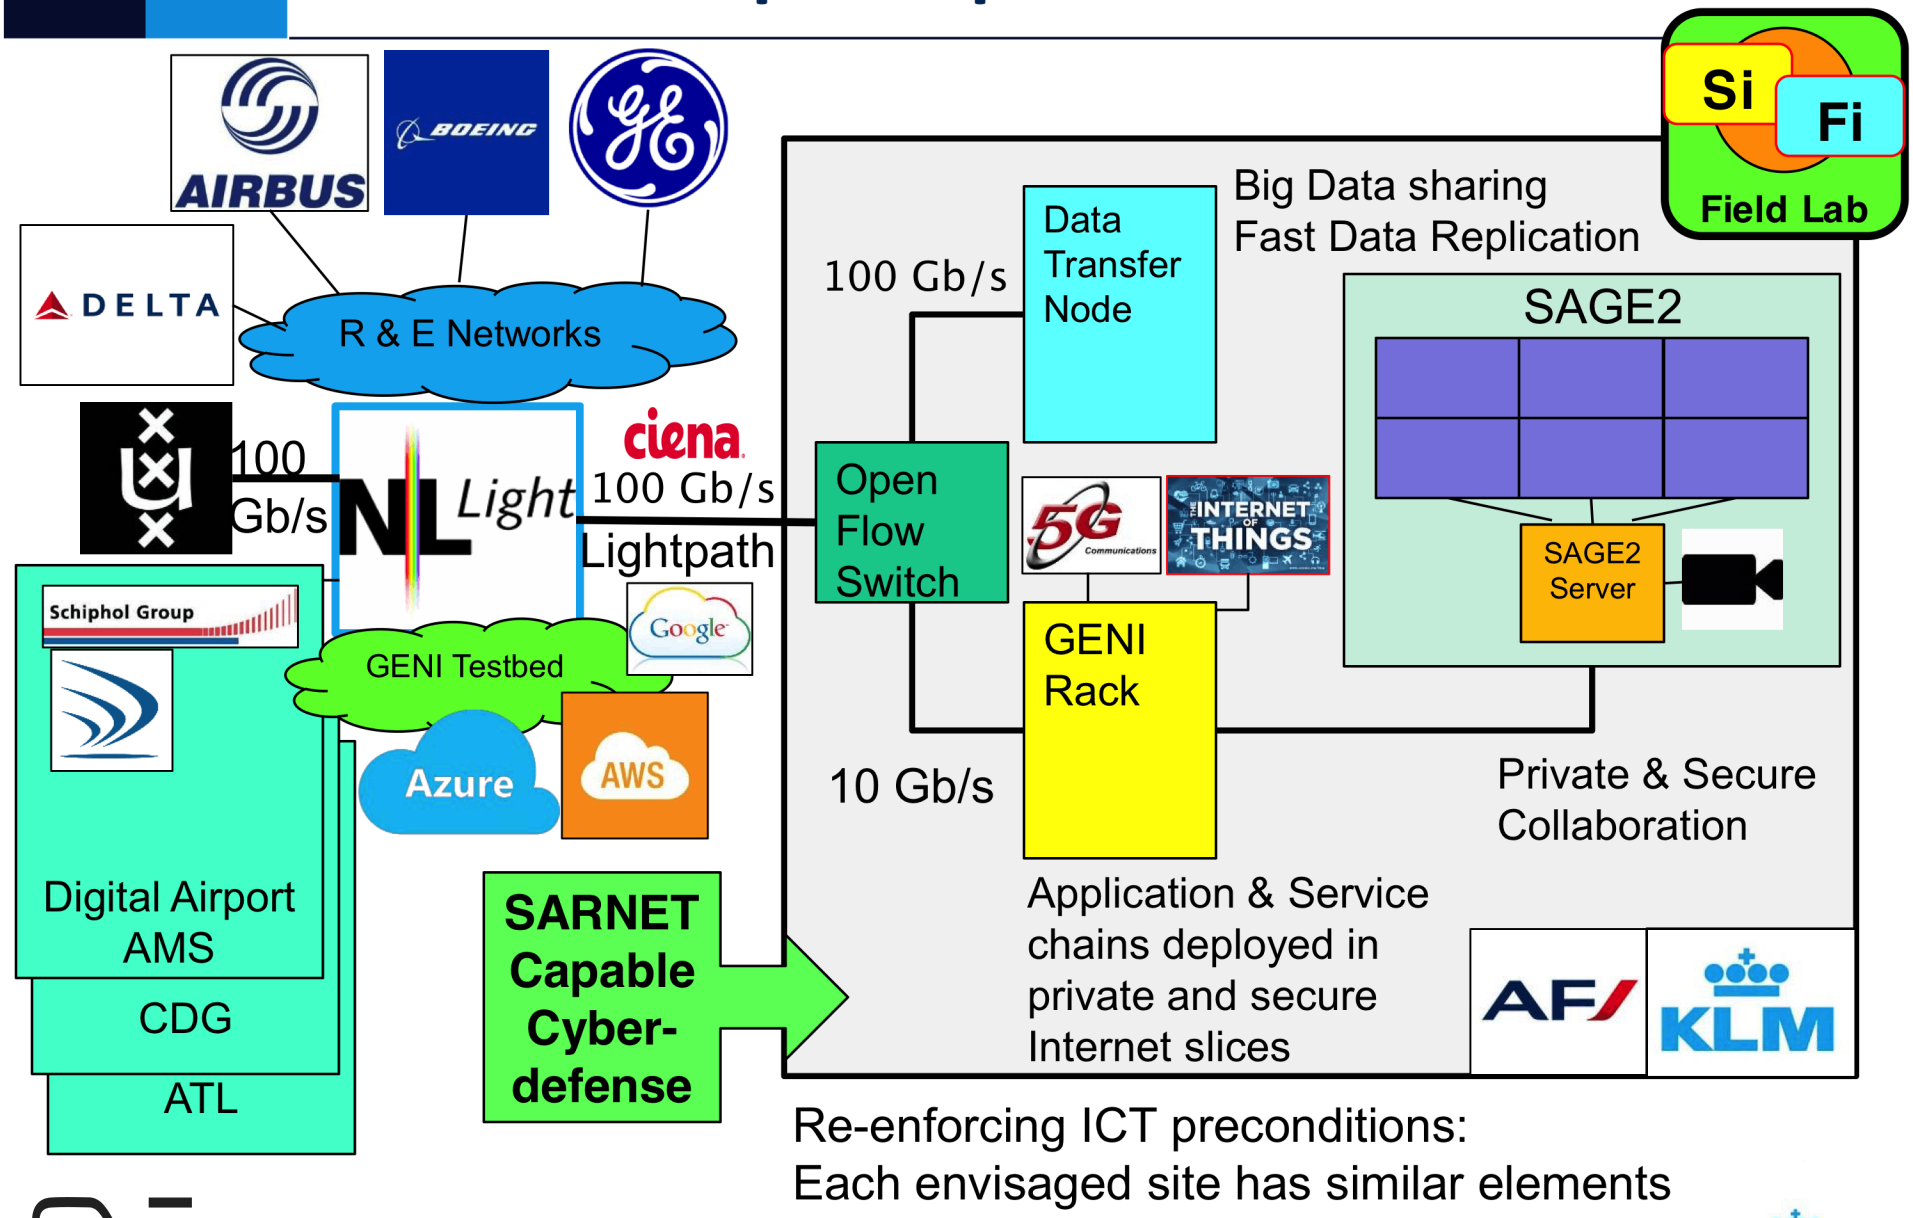

Re-enforcing ICT preconditions:
Each envisaged site has similar elements

AIRFRANCE KLM

Data Processing models

- Bring data to computing
- Bring computing to data
- Bring computing and data to (un)trusted third party
- A mix of all of the above
- Block chain to record what happened
- Block chain for data integrity
- Bring the owner of Data in control!
- Data owner policy + PEP technology

The VM Turntable Demonstrator

iGrid2005
SC2005

hitless remote rendering

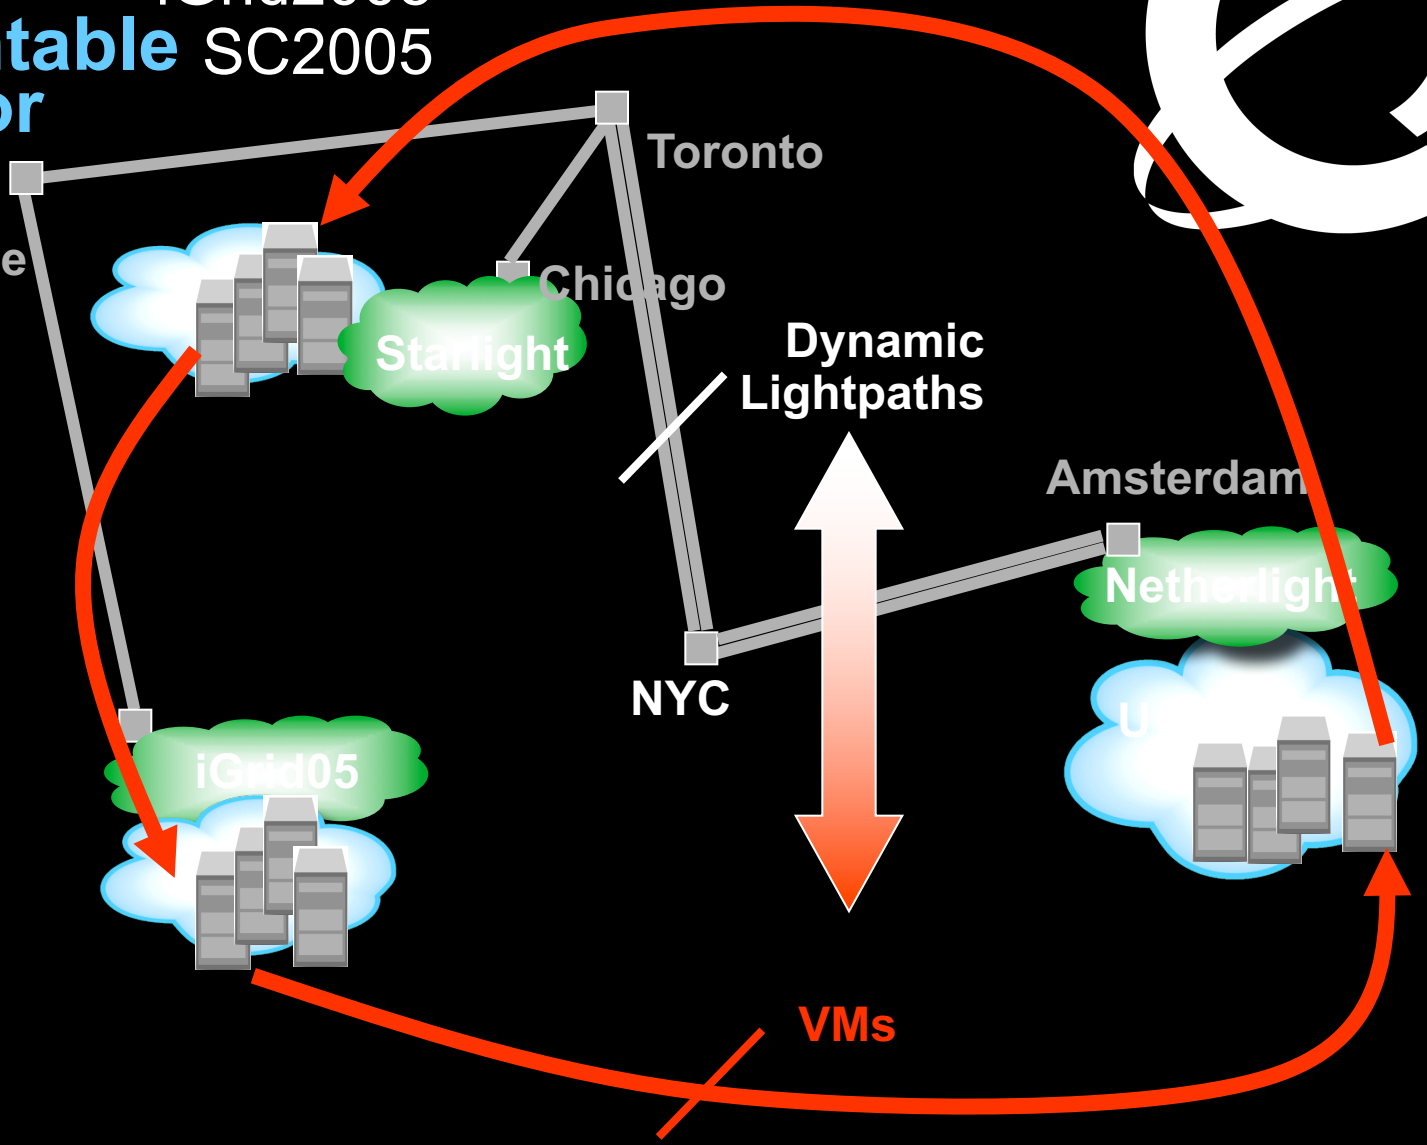

The VMs that are live-migrated run an iterative search-refine-search workflow against data stored in different databases at the various locations. A user in San Diego gets hitless rendering of search progress as VMs spin around

Experiment outcomes
Note, this was in 2005!

We have demonstrated seamless, live migration of VMs over WAN

For this, we have realized a network service that

- Exhibits predictable behavior; tracks endpoints
- Flex bandwidth upon request by credited applications
- Doesn't require peak provisioning of network resources

Pipelining bounds the downtime in spite of high RTTs

- San Diego – Amsterdam, 1GE, RTT = 200 msec, downtime <= 1 sec
- Back to back, 1GE, RTT = 0.2-0.5 msec, downtime = ~0.2 sec*
- **Clark et al. NSDI 05 paper. Different workloads*

VM + Lightpaths across MAN/WAN are deemed a powerful and general alternative to RPC, GRAM approaches

We believe it's a representative instance of active cpu+data+net orchestration

F. Travostino, P. Daspit, L. Gommans, C. Jog, C.T.A.M. de Laat, J. Mambretti, I. Monga, B. van Oudenaarde, S. Raghunath and P.Y. Wang, "Seamless Live Migration of Virtual Machines over the MAN/WAN", Future Generation Computer Systems, Volume 22, Issue 8, October 2006, Pages 901-907.

Secure Policy Enforced Data Processing

- Bringing data and processing software from competing organisations together for common goal
- Docker with encryption, policy engine, certs/keys, blockchain and secure networking
- Data Docker (virtual encryped hard drive)
- Compute Docker (protected application, signed algorithms)
- Visualization Docker (to visualize output)

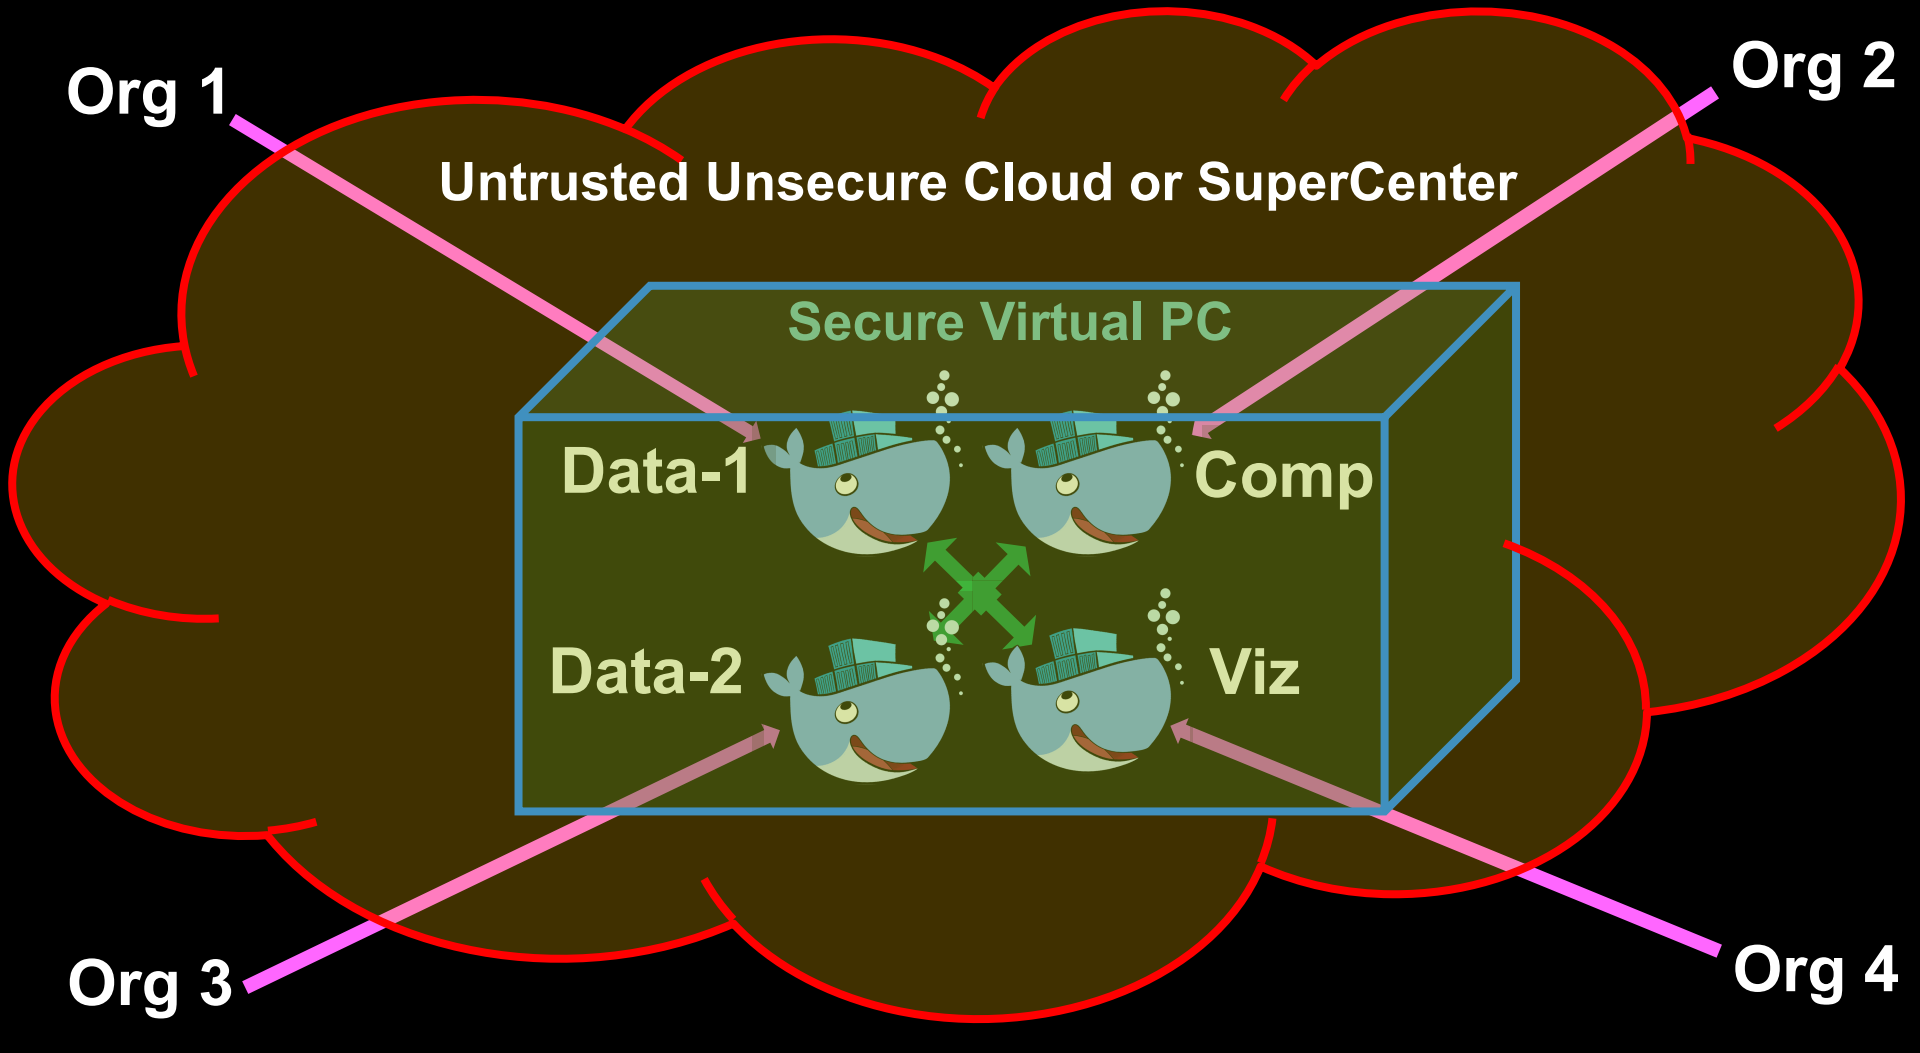

Pacific Research Platform testbed involvement

Research goal: Explore value of academic network research capabilities that enable innovative ways & models to share big data assets

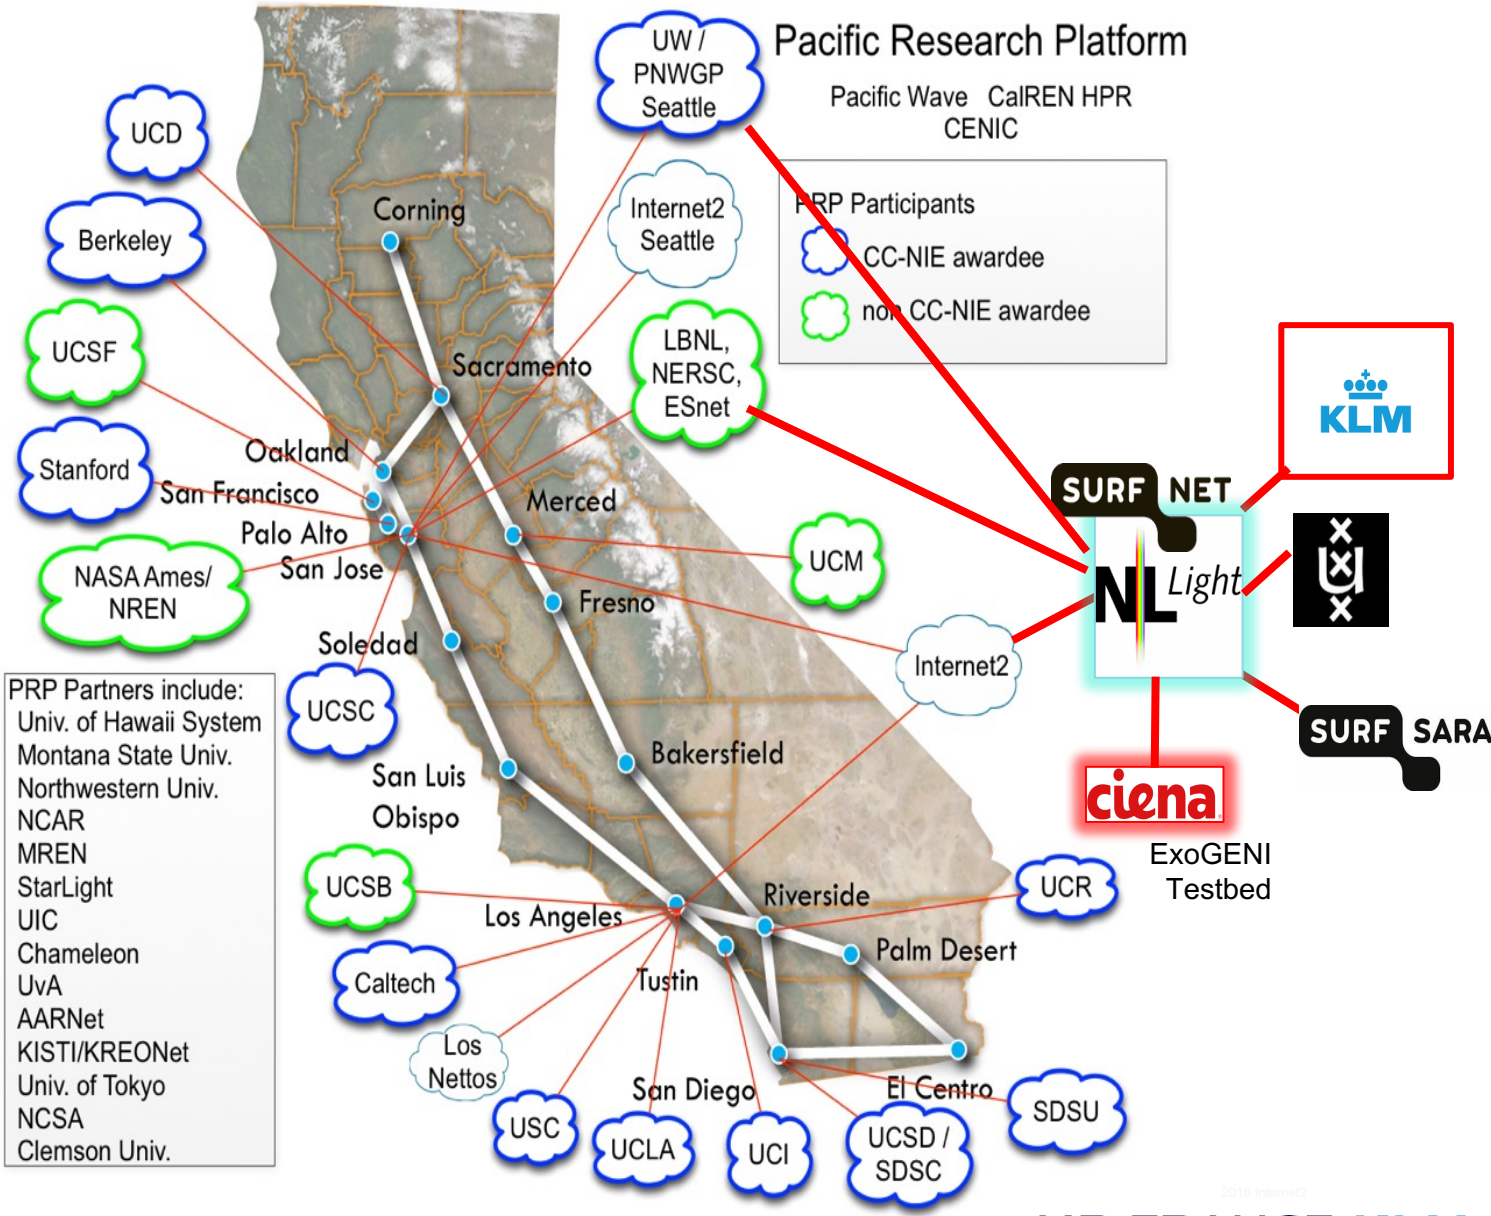

PACIFIC RESEARCH PLATFORM

Note: this diagram represents a subset of sites and connections.

Networks of ScienceDMZ's & SDX's

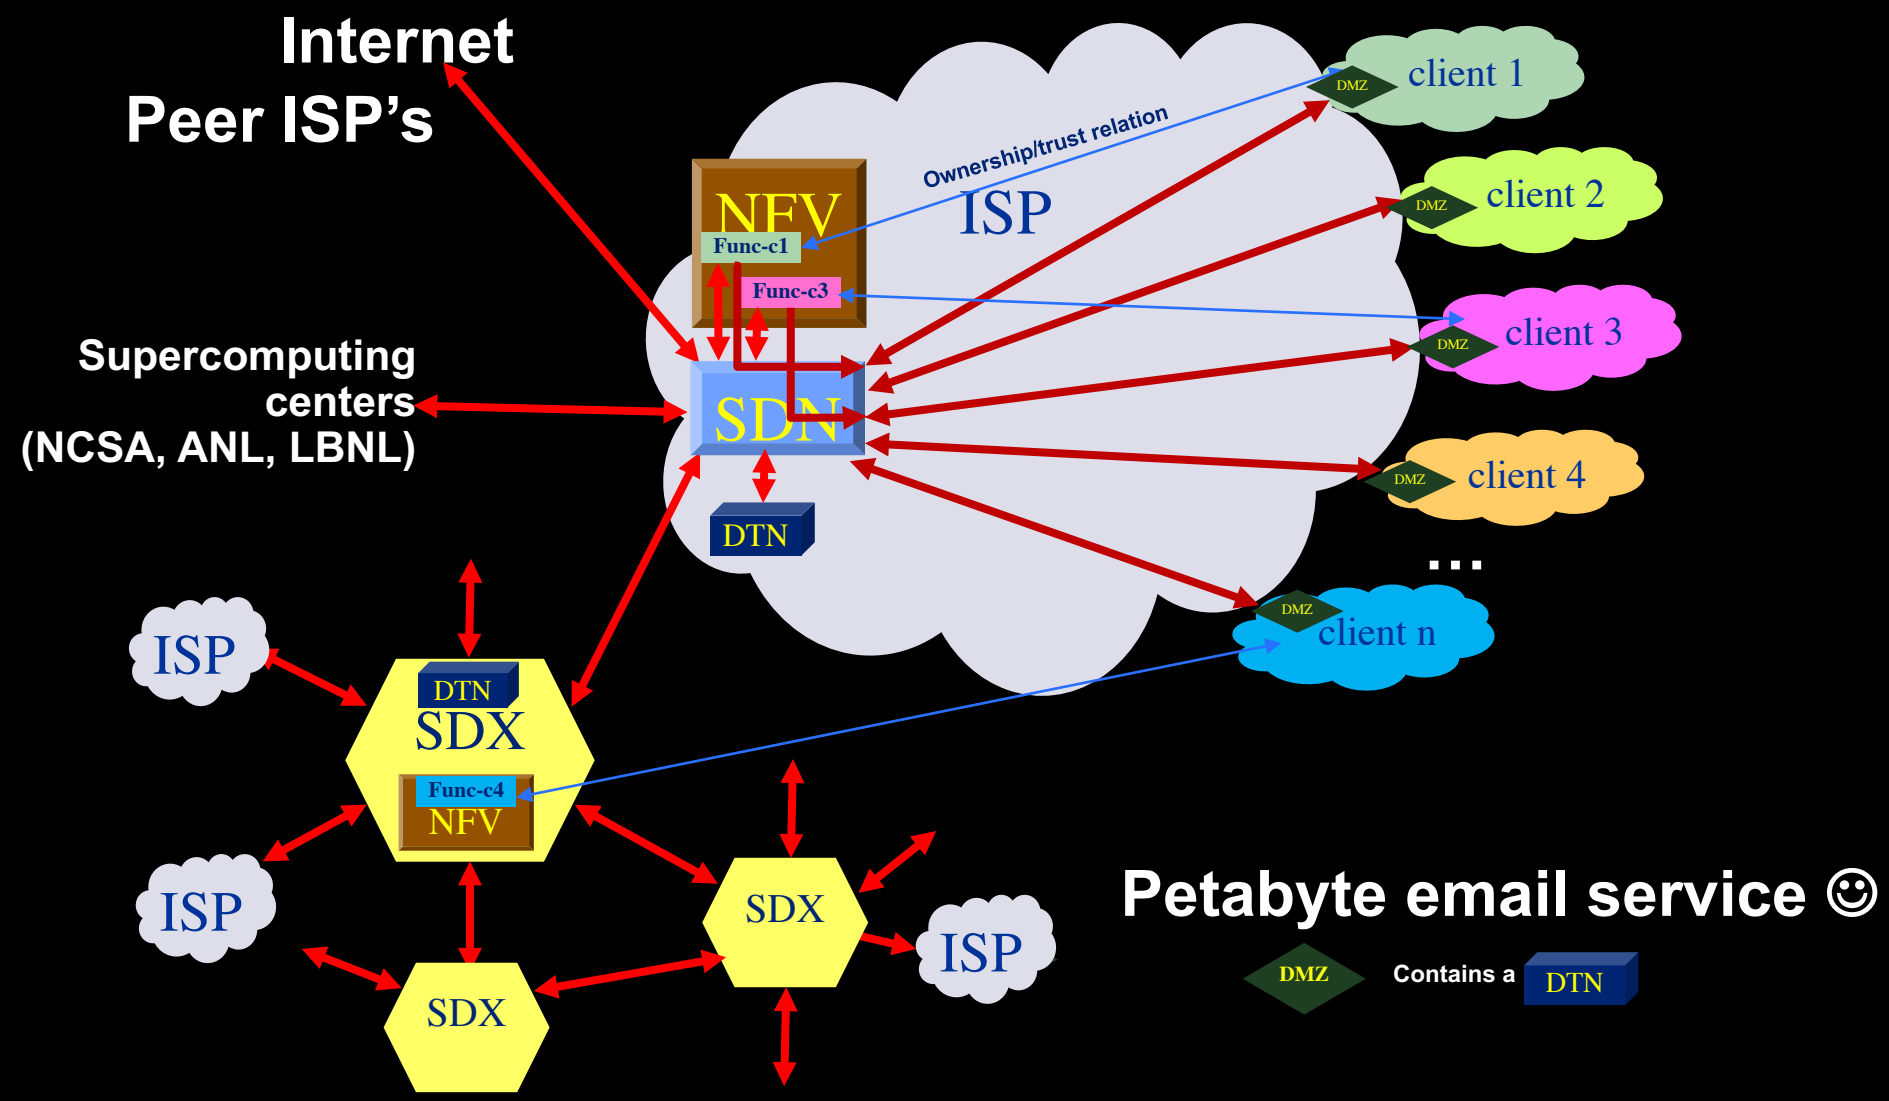

Mission

Can we create smart and safe data processing infrastructures that can be tailored to diverse application needs?

- *Capacity*
  - *Bandwidth on demand, QoS, architecture, [illegible]ics, performance*
- *Capability*
  - *[illegible]ogramma[illegible], virtualizat[illegible]n, complexity, semantics, workflows*
- *Sec[illegible]*
  - *[illegible]nonymity, integrity of data in distributed data processing*
- *Sustainability*
  - *Greening infrastructure, awareness*
- *Resilience*
  - *Systems under attack, failures, disasters*

SMART

I want to

"Show Big Bug Bunny in 4K on my Tiled Display using green Infrastructure"

- Big Bugs Bunny can be on multiple servers on the Internet.
- Movie may need processing / recoding to get to 4K for Tiled Display.
- Needs deterministic Green infrastructure for Quality of Experience.
- Consumer / Scientist does not want to know the underlying details.

➔ His refrigerator also just works!

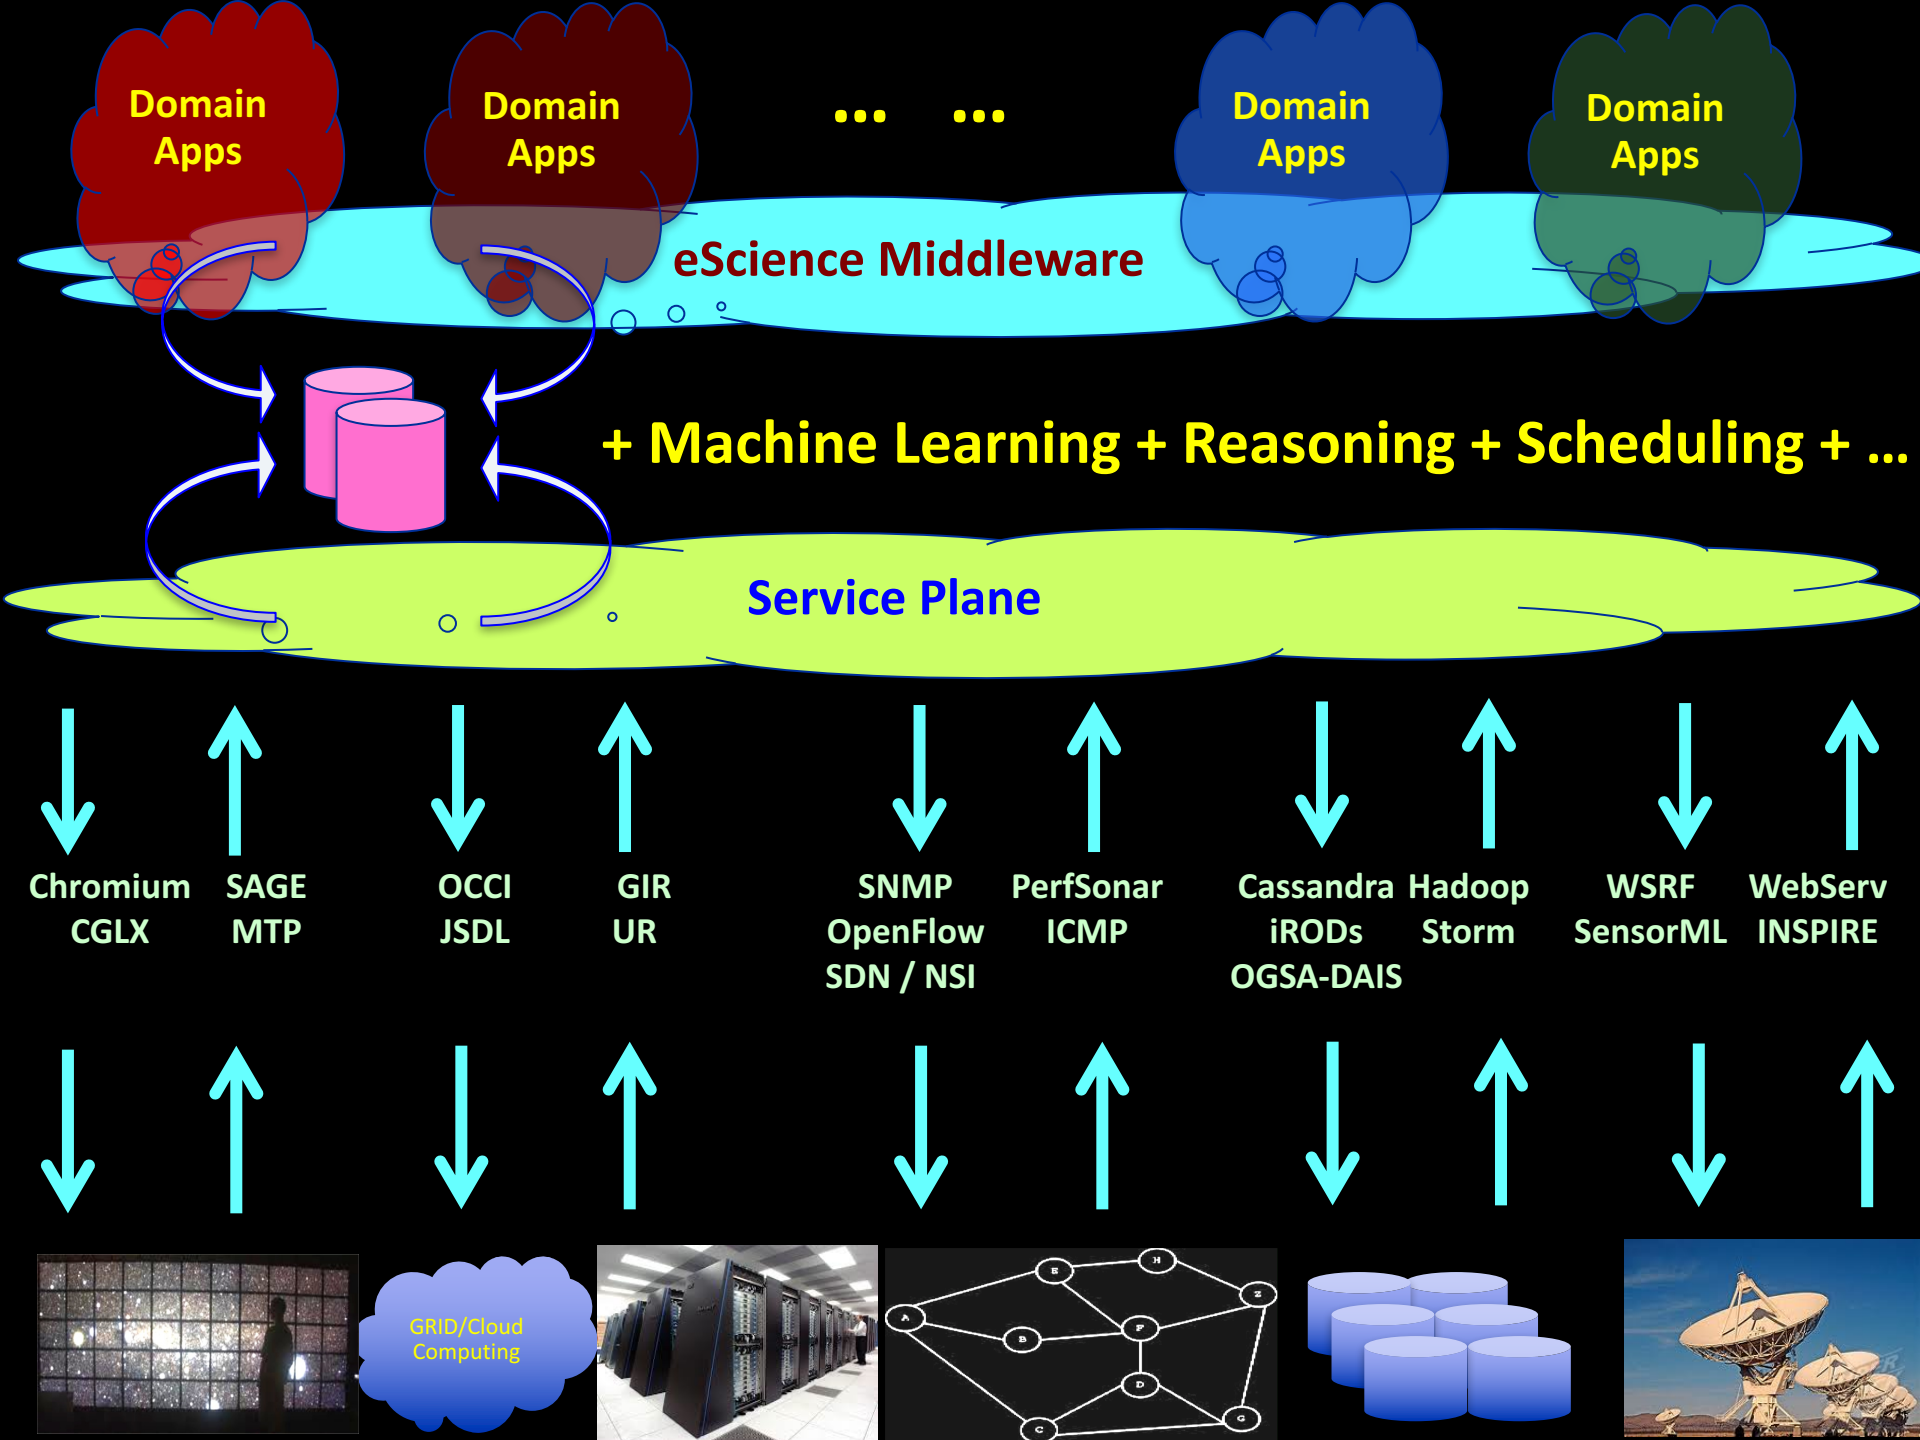
Domain Apps
Domain Apps
... ...
Domain Apps
Domain Apps
eScience Middleware
+ Machine Learning + Reasoning + Scheduling + …
Service Plane
Chromium CGLX
SAGE MTP
OCCI JSDL
GIR UR
SNMP OpenFlow SDN / NSI
PerfSonar ICMP
Cassandra iRODs OGSA-DAIS
Hadoop Storm
WSRF SensorML
WebServ INSPIRE
GRID/Cloud Computing

The Big Data Challenge

Doing Science

Wis dom

Knowledge to act

Information

Data

a.o. from ESFRI's

ICT to enable Science

e-IRG

Workflows Schedulers to act

OWL

XML, RDF, rSpec, SNMP, Java based, etc.

The Big Data Challenge

Doing Science

ICT to enable Science

Scientists live here!

Science App Store?

Wis dom

Knowledge

e-IRG

Workflows Schedulers

MAGIC DATA CARPET

curation - description - trust - security - policy – integrity

Information

OWL

Data

a.o. from ESFRI's

XML, RDF, rSpec, SNMP, Java based, etc.










TimeLine

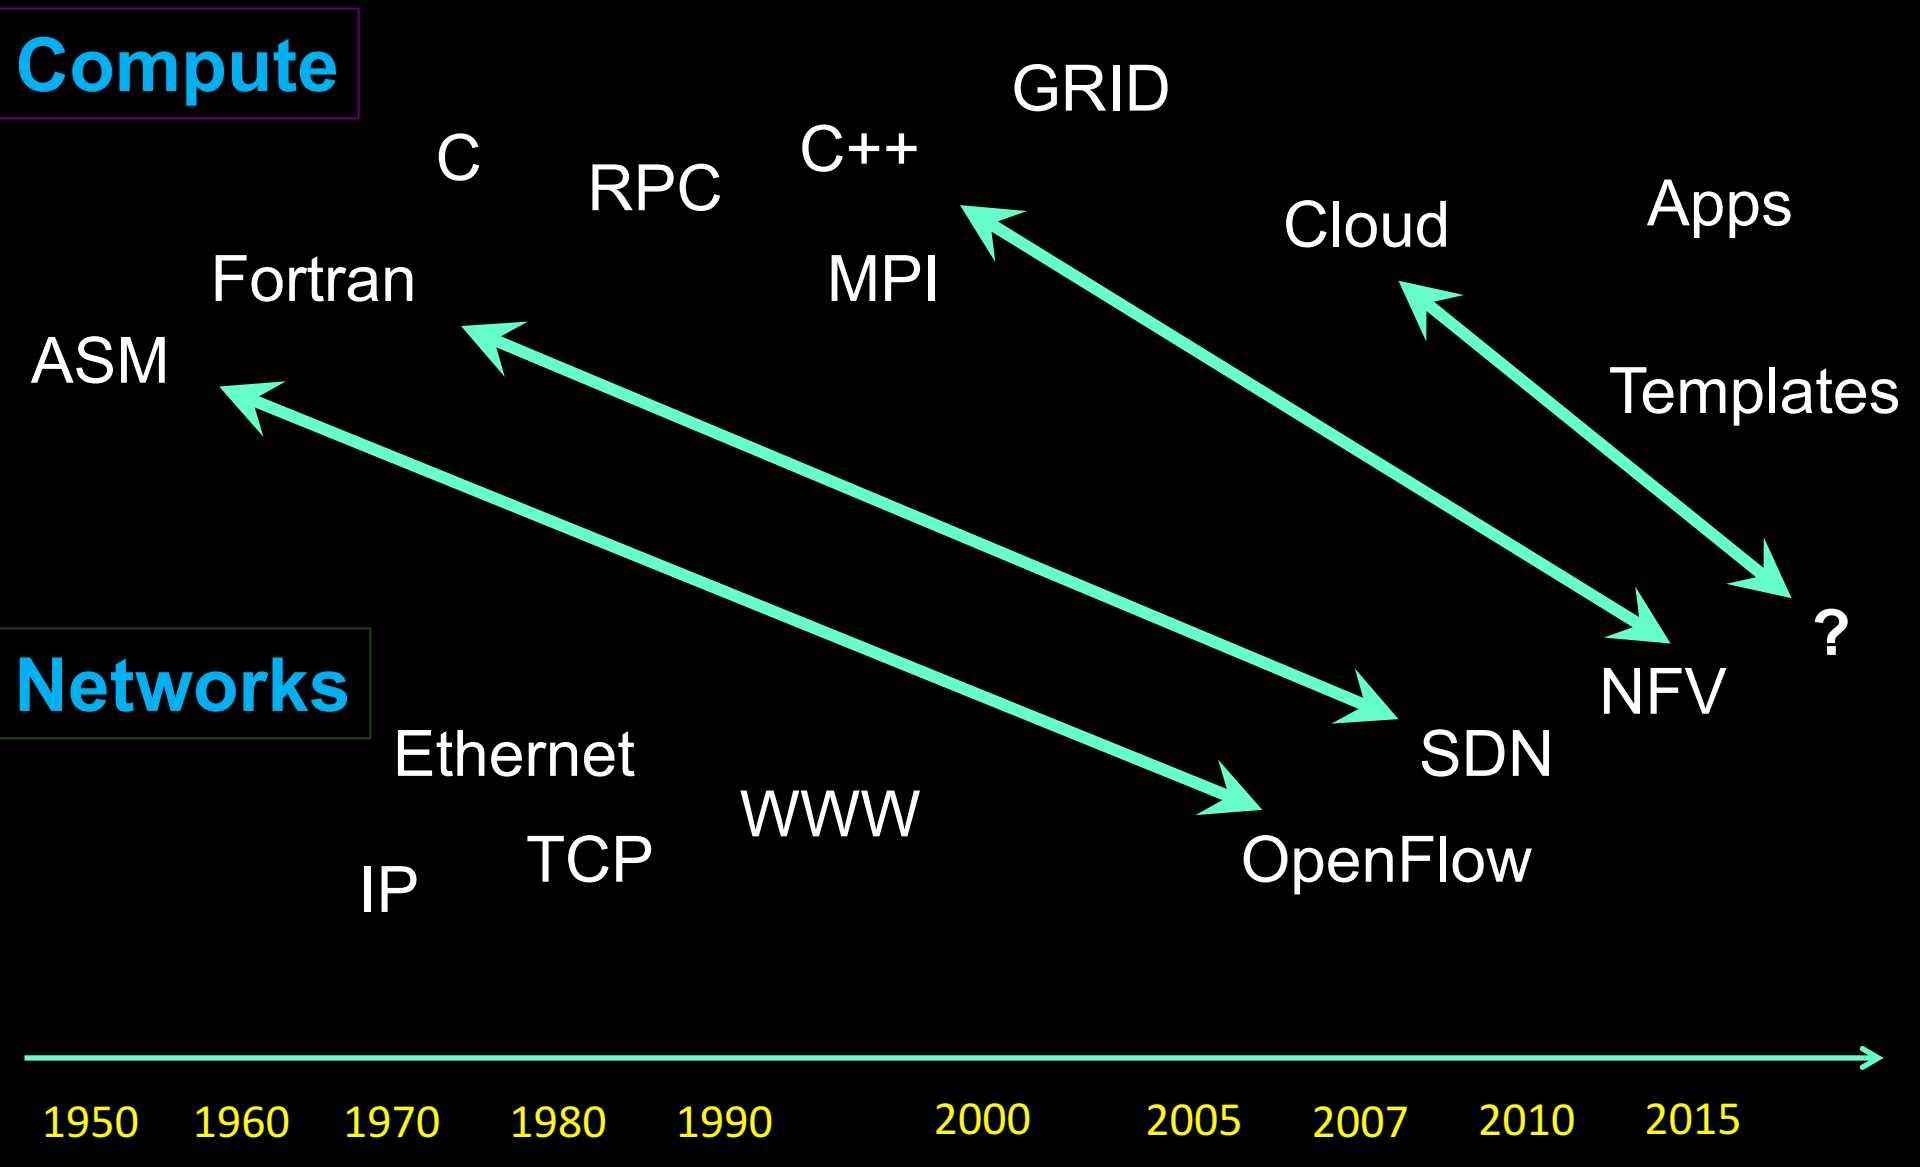
Compute
GRID
C
RPC
C++
Cloud
Apps
Fortran
MPI
ASM
Templates
?
Networks
NFV
Ethernet
SDN
WWW
TCP
IP
OpenFlow
1950
1960
1970
1980
1990
2000
2005
2007
2010
2015

The constant factor in our field is Change!

The 50 years it took Physicists to find one particle, the Higgs, we came from:

Assembler, Fortran, COBOL, VM, RSX11, Unix, c, Pascal, SmallTalk, DECnet, VMS, TCP/IP, c++, Internet, WWW, ATM, Semantic Web, Photonic networks, Google, Grid, Phyton, FaceBook, Twitter, Cloud, SDN, Data^3, App's

to:

DDOS attacks destroying Banks and BitCoins!

Conclusion:

Need for Safe, Smart, Resilient Sustainable Infrastructure.

Why?

Because we can!

Questions?

http://delaat.net

http://sne.science.uva.nl

http://www.os3.nl/

http://sne.science.uva.nl/openlab/

http://pire.opensciencedatacloud.org

http://staff.science.uva.nl/~delaat/pire/

https://rd-alliance.org

http://envri.eu

Supported by:

SC16 DEMO STARNET Operational Level