

Smart Cyber Infrastructure for Big Data Processing Cees de Laat



more data! . . .

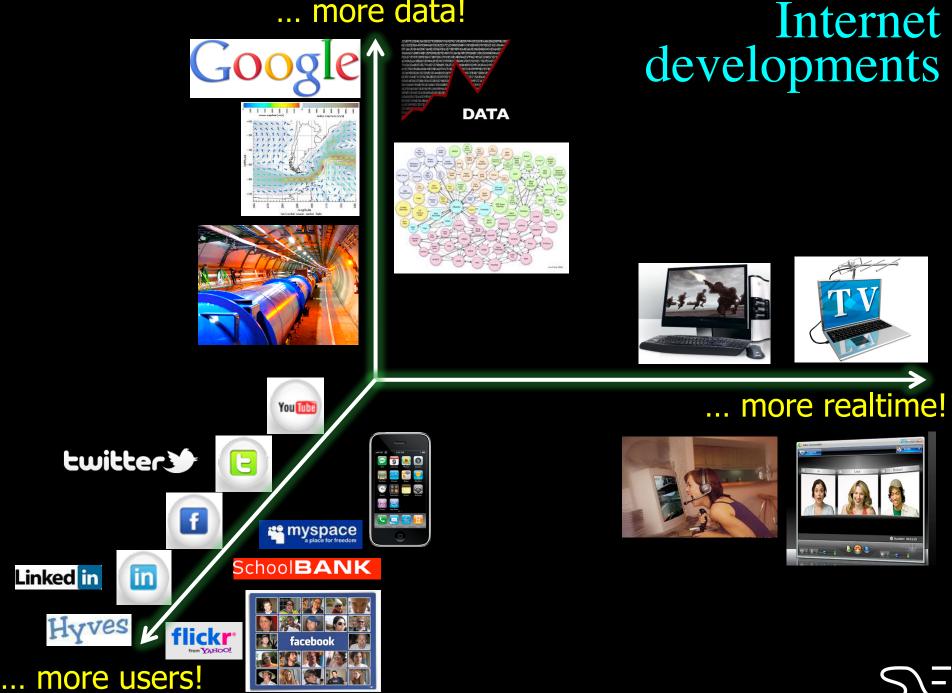

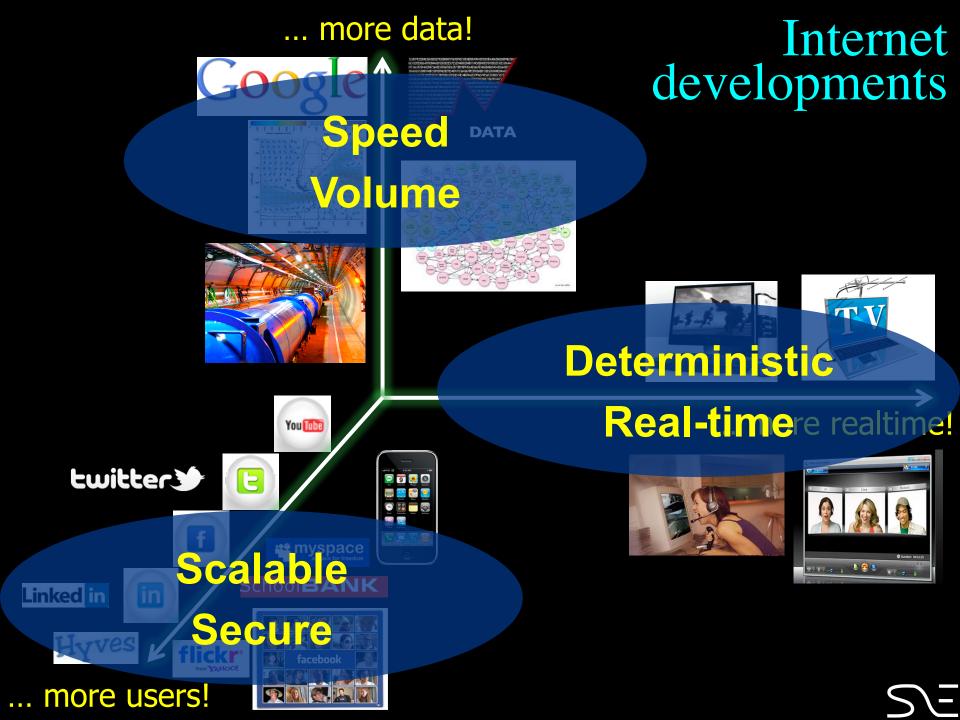

Mission

Can we create smart and safe data processing infrastructures that can be tailored to diverse application needs?

- Capacity
- Capability
- Security
- Sustainability
- Resilience




Mission

Can we create smart and safe data processing infrastructures that can be tailored to diverse application needs?


- Capacity
 - Bandwidth on demand, QoS, architectures, photonics, performance
- Capability
 - Programmability, virtualization, complexity, semantics, workflows
- Security
 - Anonymity, integrity of data in distributed data processing
- Sustainability
 - Greening infrastructure, awareness
- Resilience
 - Systems under attack, failures, disasters

ATLAS detector @ CERN Geneve

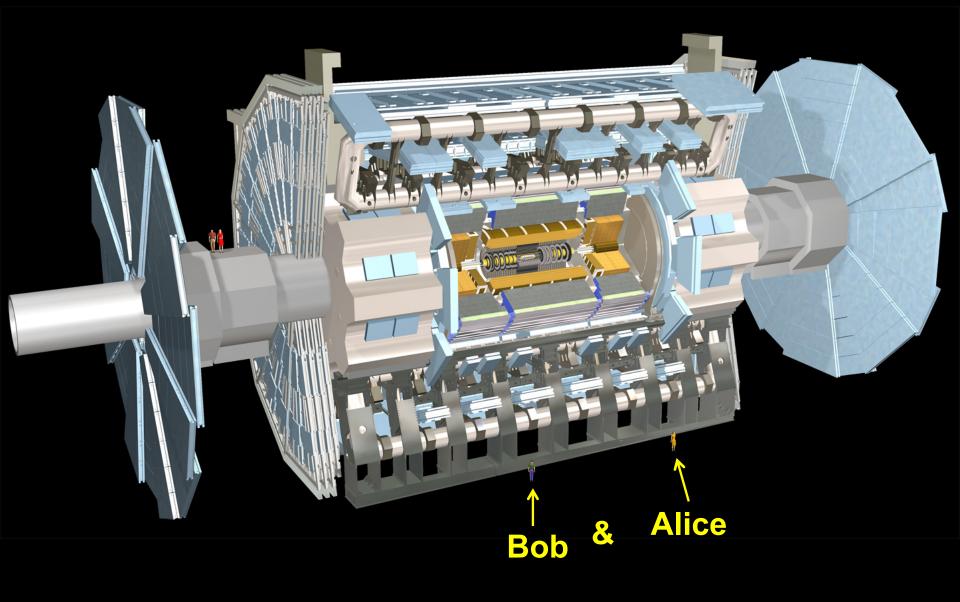


What Happens in an Internet Minute?



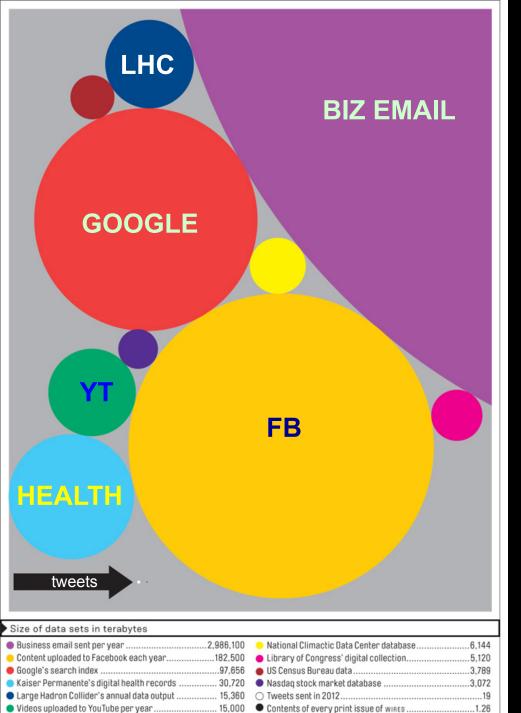

There **i**S always a bigger fish

GPU cards are distruptive!

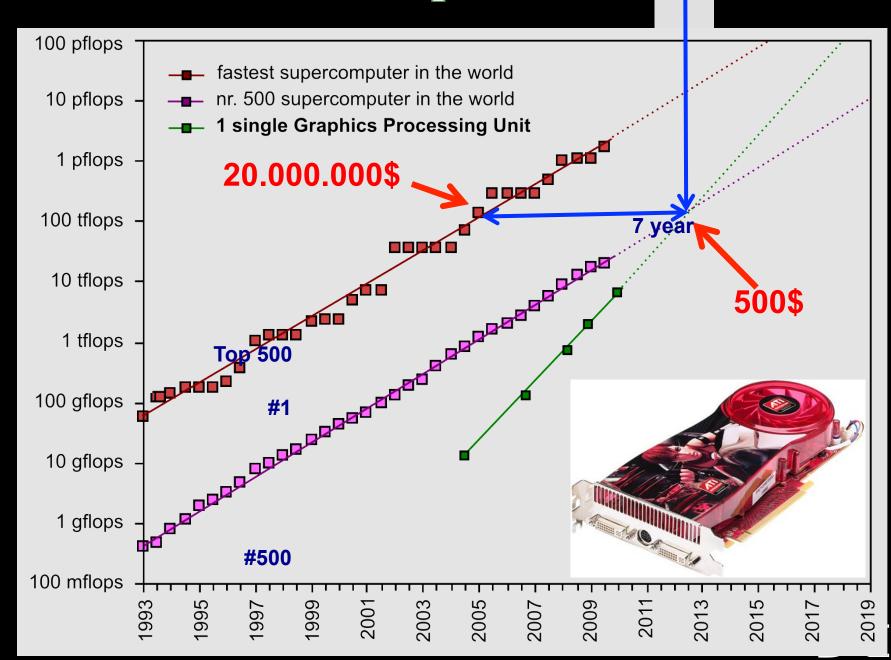

Reliable and Safe!

This omnipresence of IT makes us not only strong but also vulnerable.

 A virus, a hacker, or a system failure can instantly send digital shockwaves around the world.


\$10,000,000

\$1,000,000.00

The hardware and software that allow all our systems to operate is becoming bigger and more complex all the time, and the capacity of networks and data storage is increasing by leaps and bounds.



500

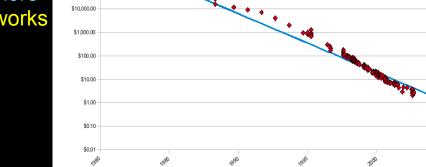

We will soon reach the limits of what is currently feasible and controllable.


1980 - 2009

.

https://www.knaw.nl/shared/resources/actueel/publicaties/pdf/20111029.pdf


The GLIF – LightPaths around the World

F Dijkstra, J van der Ham, P Grosso, C de Laat, "A path finding implementation for multi-layer networks", Future Generation Computer Systems 25 (2), 142-146.

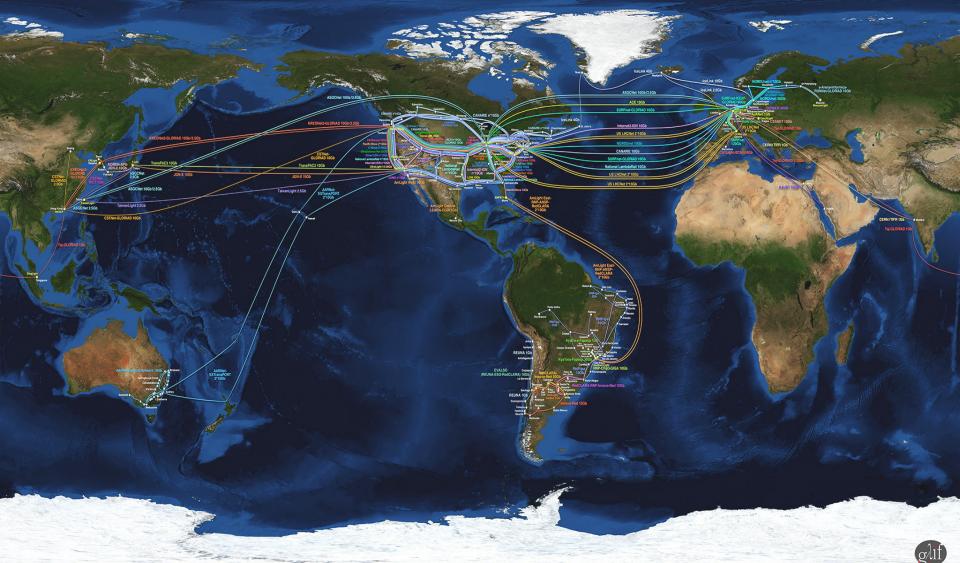

ExoGeni @ OpenLab - UvA

Installed and up June 3th 2013

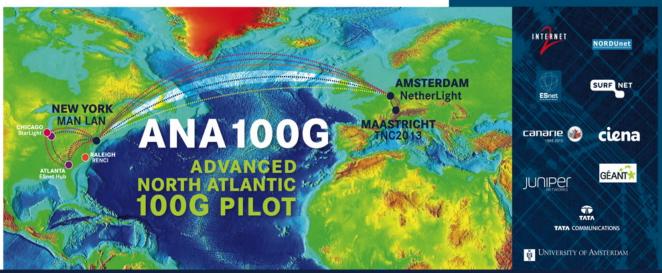

TNC2013 DEMOS JUNE, 2013


DEMO	TITLE	OWNER	AFFILIATIO	N E-MAIL	A-SIDE	Z-SIDE	PORTS(S) MAN LAN	PORTS(S) TNC2013	DETAILS
1	Big data transfers with multipathing, OpenFlow and MPTCP	Ronald van der Pol	SURFnet	ronald.vanderpol@surfnet.nl	TNC/MECC, Maastricht NL	Chicago, IL	Existing 100G link between internet2 and ESnet	2x40GE (Juniper)+ 2x10GE (OME6500)	In this demonstration we show how multipathing, Queriflow and Multipath TCP (MPTCP) can help in large the bundlers between data centres (Matarticht and Chatago). An Queriflow application providens multiple paths between the arown and MPTCP will bound out the arown site animaticnously sand traffic access all those paths. This demo uses 2x400 or the transatoritic TCO (End. (See) access and Matarta and Matarta and America and Americ
2	Visualize 100G traffic	Inder Monga	ESnet	imonga@es.net					Using an SNMP feed from the Juniper switch at TNC2013,and/or Biocade AL25 node in MANLAN, this denne would visualize the total traffic on the lisk, of all demos aggregated. The network diagram will show the transatiantic topology and some of the demo topologies.
3	How many modern servers can fill a 100Gbps Transatlantic Circuit?	Inder Monga	ESnet	imonga@es.net	Chicago, III	TNC showfloor	1x 100GE	8x 10GE	In this demonstration, we show that with the proper tuning and tool, only 2 hosts on each continent can generate almost BOOps of tunite. Each server has 4 KO NOS connected to a 460 vitual cruzil, and has even17 showing to generate turitic. Sector new "pert" through measurement took list in best, combines the best features from other tools such as pert, nutrop, and neight. See https://mys.ret/demos/trc2001/
4	First European Exo/GENI at Work	Jeroen van der Ham	UvA	vdham@uva.nl	RENCI, NC	UvA, Amsterdam, NL	1x 10GE	1x 10GE	The ExoGEN racks at RENCI and UvA will be interconnected over a 10G spipe and be on continuously, showing GENI connectivity between Ansterdam and the rest of the GENI nodes in the USA.
5	Up and down North Atlantic @ 100G	Michael Enrico	DANTE	michael.enrico@dante.net	TNC showfloor	TNC showfloor	1x 100GE	1x 100GE	The DANTE 1900E test set will be placed at the TNC2013 showfloor and connected to the Juniper M 1900. When this demo is usualing a loog (i) MAN LAYS Brocade awitch will ensure that the traffic set to MMN LAY informs to the showfloor. On display is the throughput and RTT (to show the traffic traveled the Atlantic twice)



Connected via the new 100 Gb/s transatlantic To US-GENI

Amsterdam is a major hub in The GLIF

F Dijkstra, J van der Ham, P Grosso, C de Laat, "A path finding implementation for multi-layer networks", Future Generation Computer Systems 25 (2), 142-146.

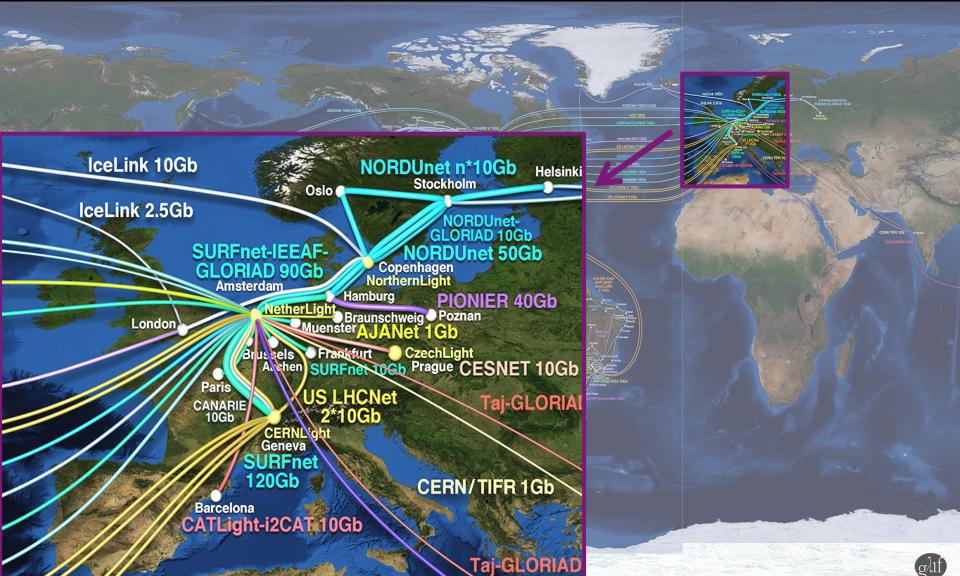

Alien light From idea to realisation!



40Gb/s alien wavelength transmission via a multi-vendor 10Gb/s DWDM infrastructure



Alien wavelength advantages

- Direct connection of customer equipment^[1]
 → cost savings
- Avoid OEO regeneration → power savings
- Faster time to service^[2] → time savings
- Support of different modulation formats^[3]
 → extend network lifetime


Alien wavelength challenges

- Complex end-to-end optical path engineering in terms of linear (i.e. OSNR, dispersion) and non-linear (FWM, SPM, XPM, Raman) transmission effects for different modulation formats.
- Complex interoperability testing.
- End-to-end monitoring, fault isolation and resolution.
- End-to-end service activation.

In this demonstration we will investigate the performance of a 40Gb/s PM-QPSK alien wavelength installed on a 10Gb/s DWDM infrastructure.


New method to present fiber link quality, FoM (Figure of Merit)

In order to quantify optical link grade, we propose a new method of representing system quality: the FOM (Figure of Merit) for concatenated fiber spans.



Transmission system setup

JOINT SURFnet/NORDUnet 40Gb/s PM-QPSK alien wavelength DEMONSTRATION.



Test results



Error-free transmission for 23 hours, 17 minutes \rightarrow BER < 3.0 $10^{\text{-16}}$

Conclusions

- We have investigated experimentally the all-optical transmission of a 40Gb/s PM-QPSK alien wavelength via a concatenated native and third party DWDM system that both were carrying live 10Gb/s wavelengths.
- The end-to-end transmission system consisted of 1056 km of TWRS (TrueWave Reduced Slope) transmission fiber.
- We demonstrated error-free transmission (i.e. BER below 10-15) during a 23 hour period.
- More detailed system performance analysis will be presented in an upcoming paper.

NØRTEL










REFERENCES [1] "OPERATIONAL SOLUTIONS FOR AN OPEN DWOML LAVER", OL GESTEL ET AL, OPE 2009 [2] "ATAT OPTICAL THANSPORT SERVICES", RABBARA E. SANTH, OPE 200 [3] "OPEK SANNOS FALL-OPTICAL CORE NETWORKS", ANDERVICIO AD NOL ALL HISINERE, RACCORDO [1] (ANTERLISIENTI HITERNAL COMMUNICATION ACKNOWLEDGEMENTS WAR & GATEFUL TO NORDUNET FOR PROVIDING US WITH BANDWOTH ON THER DWOML LINK FOR THE SEPERIMENT AND ALS OF OR THER SUPPORT AND ASSTANCE DIRING THE PROVIDENT FOR PROVIDING US WITH BANDWOTH ON THER DWOML LINK FOR THE SEPERIMENT AND ALS OF OR THER SUPPORT AND ASSTANCE DIRING THE PROVIDENT OF ALL OPTICAL ACCOUNT OF OF THE INDIA LANN INTER FOR THER DIRIGINAL MONON SUPPORT

Alien light From idea to realisation!

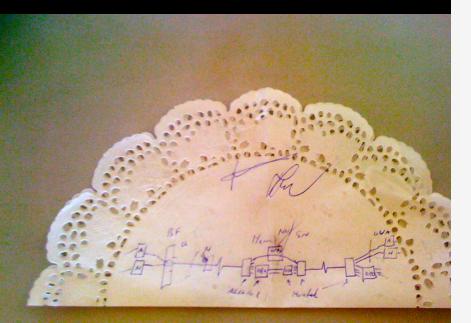

40Gb/s alien wavelength transmission via a multi-vendor 10Gb/s DWDM infrastructure



Alien wavelength advantages

- Direct connection of customer equipment^[1]
 → cost savings
- Avoid OEO regeneration → power savings
- Faster time to service^[2] → time savings
- Support of different modulation formats^[3]
 → extend network lifetime

Alien wavelength challenges


- Complex end-to-end optical path engineering in terms of linear (i.e. OSNR, dispersion) and non-linear (FWM, SPM, XPM, Raman) transmission effects for different modulation formats.
- Complex interoperability testing.
- End-to-end monitoring, fault isolation and resolution.
- End-to-end service activation.

NØRTEL

In this demonstration we will investigate the performance of a 40Gb/s PM-QPSK alien wavelength installed on a 10Gb/s DWDM infrastructure.


New method to present fiber link quality, FoM (Figure of Merit)

In order to quantify optical link grade, we propose a new method of representing system quality: the FOM (Figure of Merit) for concatenated fiber spans.



Transmission system setup

JOINT SURFnet/NORDUnet 40Gb/s PM-QPSK alien wavelength DEMONSTRATION.



Test results



Error-free transmission for 23 hours, 17 minutes \rightarrow BER < 3.0 $10^{\text{-16}}$

Conclusions


- We have investigated experimentally the all-optical transmission of a 40Gb/s PM-QPSK alien wavelength via a concatenated native and third party DWDM system that both were carrying live 10Gb/s wavelengths.
- The end-to-end transmission system consisted of 1056 km of TWRS (TrueWave Reduced Slope) transmission fiber.
- We demonstrated error-free transmission (i.e. BER below 10-15) during a 23 hour period.
- More detailed system performance analysis will be presented in an upcoming paper.

NORDUnet






ClearStream @ TNC2011

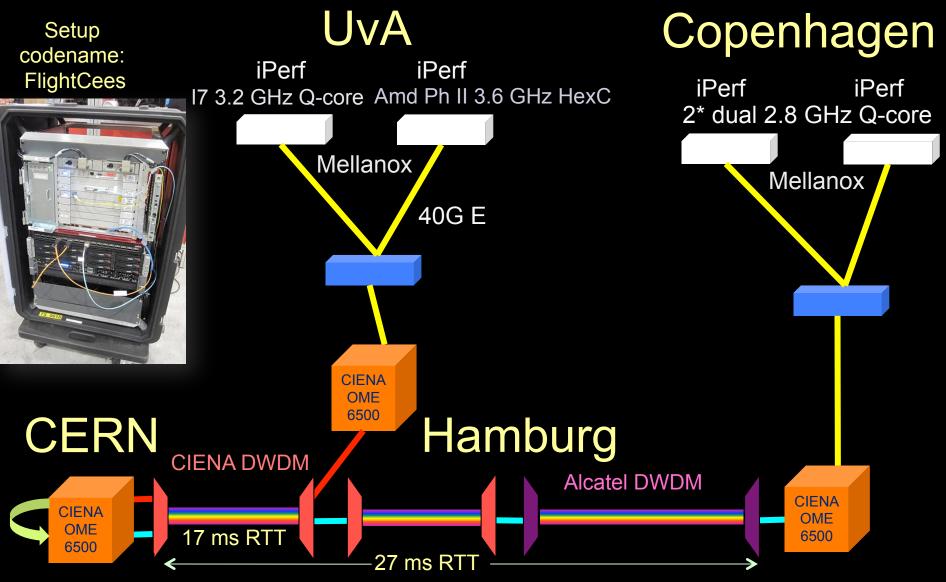

Amsterdam – Geneva (CERN) – Copenhagen – 4400 km (2700 km alien light)


Server Architecture

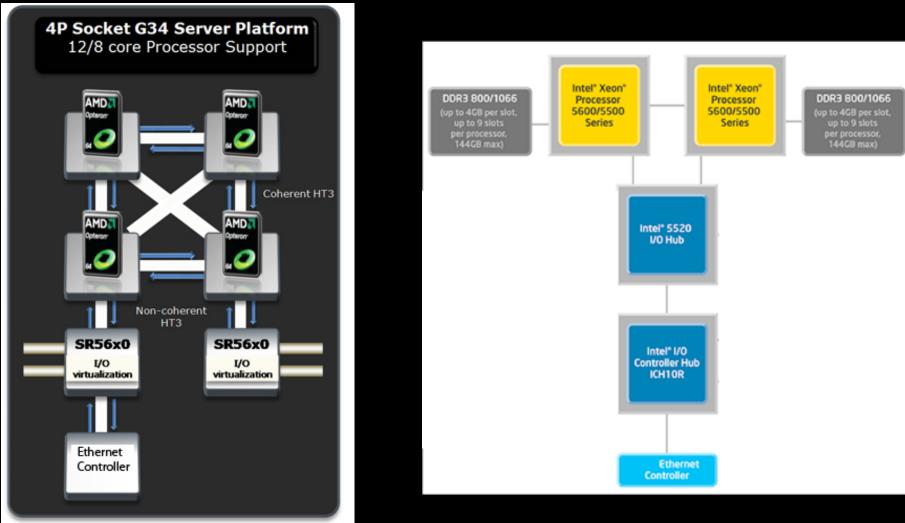

DELL R815 4 x AMD Opteron 6100

Supermicro X8DTT-HIBQF 2 x Intel Xeon

CPU Topology benchmark

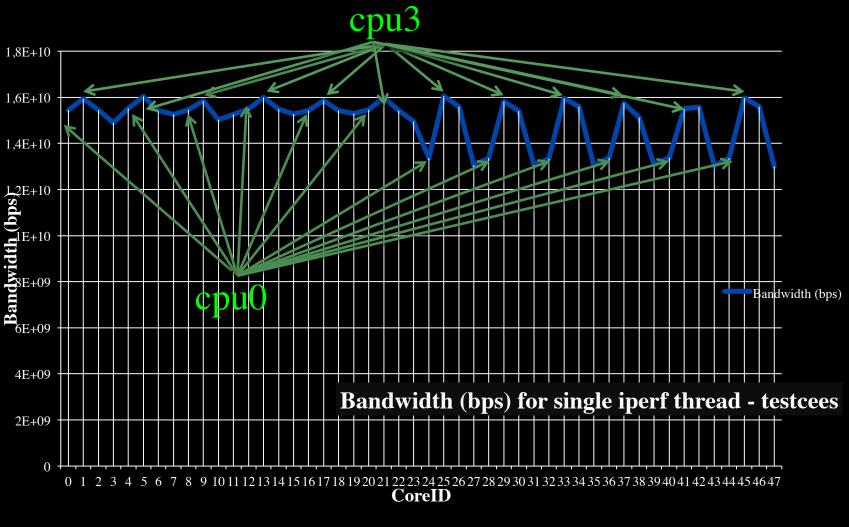

We used numactl to bind iperf to cores

Mission

Can we create smart and safe data processing infrastructures that can be tailored to diverse application needs?

- Capacity
 - Bandwidth on demand, QoS, architectures, photonics, performance
- Capability
 - Programmability, virtualization, complexity, semantics, workflows
- Security
 - Anonymity, integrity of data in distributed data processing
- Sustainability
 - Greening infrastructure, awareness
- Resilience
 - Systems under attack, failures, disasters



We investigate:






LinkedIN for Infrastructure


 \cdots


- From semantic Web / Resource Description Framework.
- The RDF uses XML as an interchange syntax.
- Data is described by triplets (Friend of a Friend):

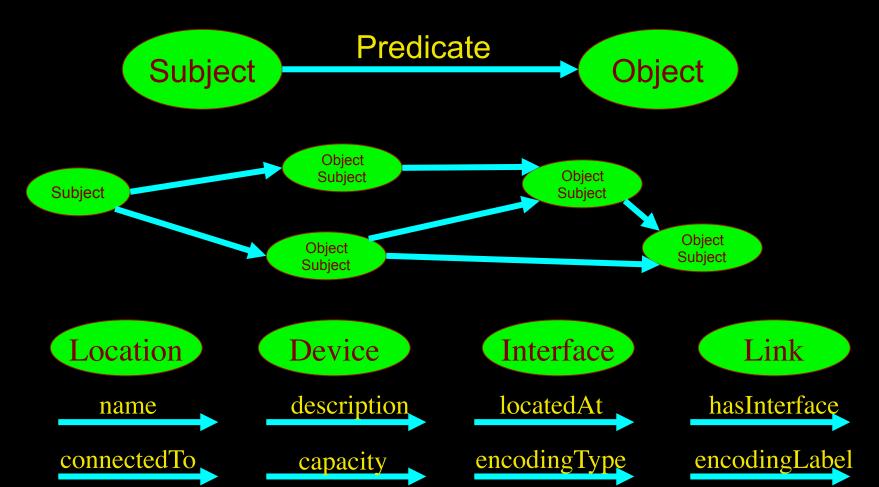


Network Description Language

Choice of RDF instead of XML syntax Grounded modeling based on G0805 description: Article: F. Dijkstra, B. Andree, K. Koymans, J. van der Ham, P. Grosso, C. de Laat, *"A Multi-Layer Network Model Based on ITU-T G.805"*

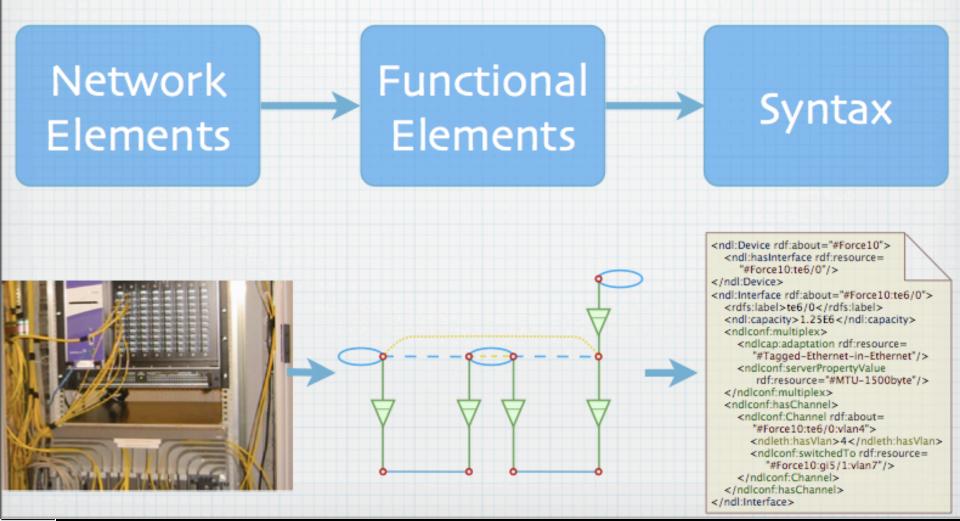

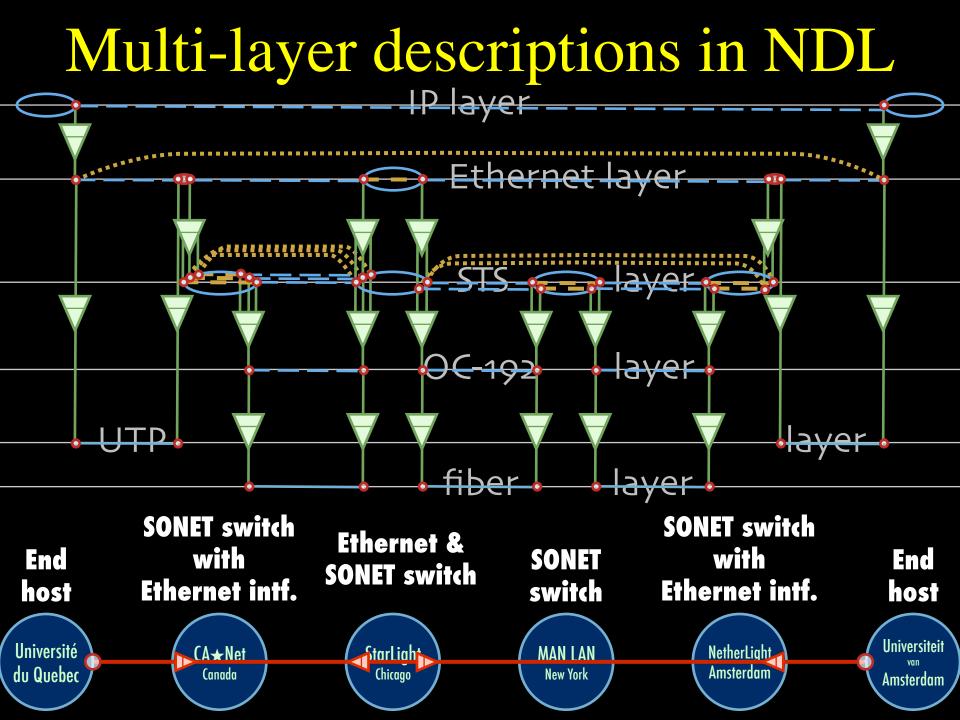


NML OGF spec

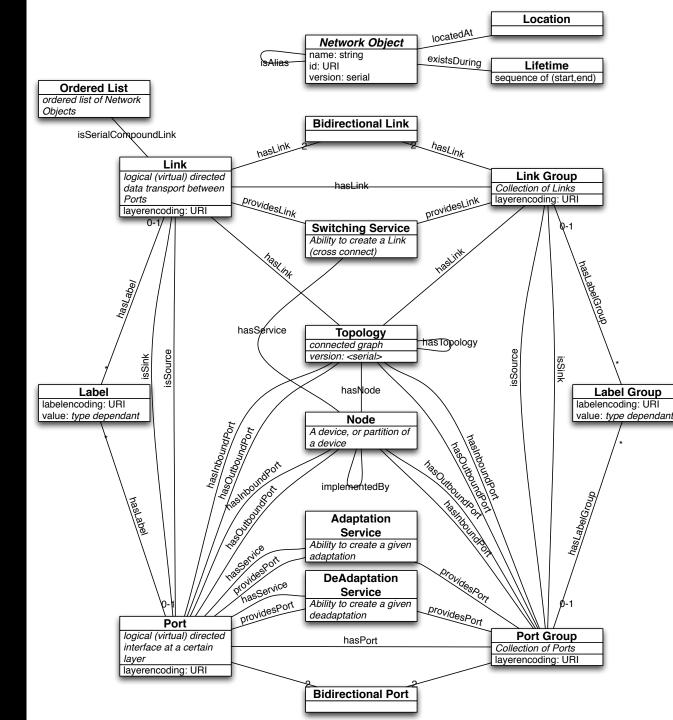

Network Topology Description

Network topology research supporting automatic network provisioning


- Inter-domain networks
- Multiple technologies
- Based on incomplete information
- Possibly linked to other resources

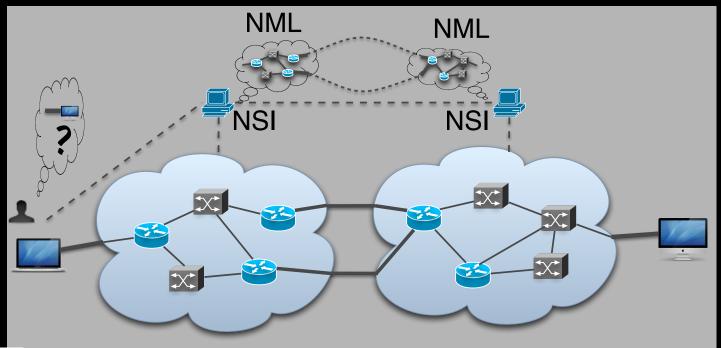




http://redmine.ogf.org/projects/nml-wg http://redmine.ogf.org/projects/nsi-wg

http://sne.science.uva.nl/ndl

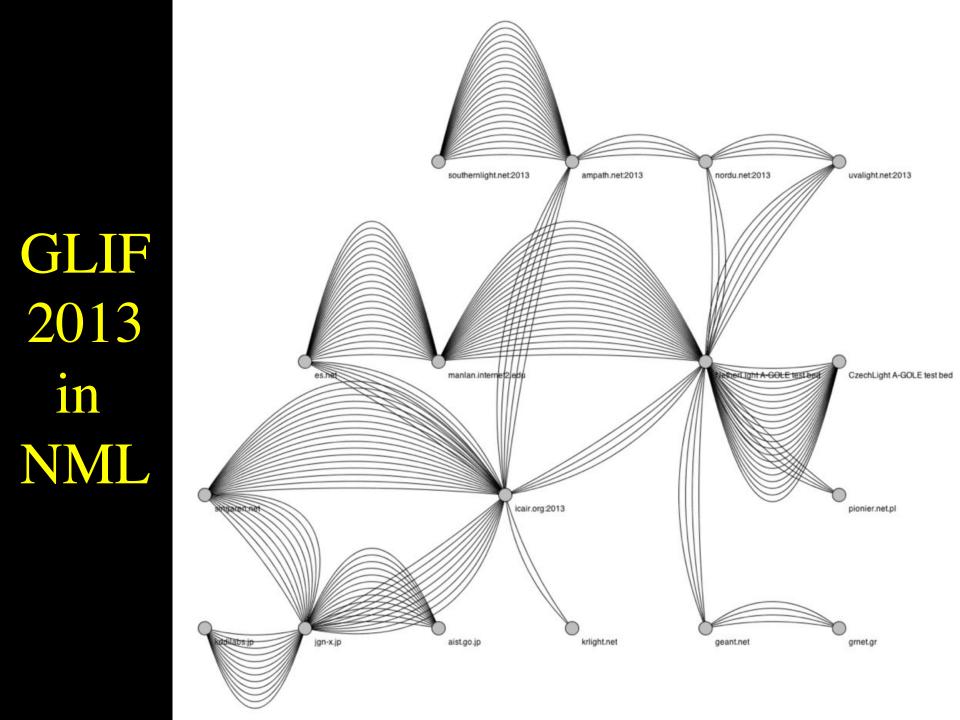

Information Modeling

Define a common information model for *infrastructures* and *services*. Base it on Semantic Web.

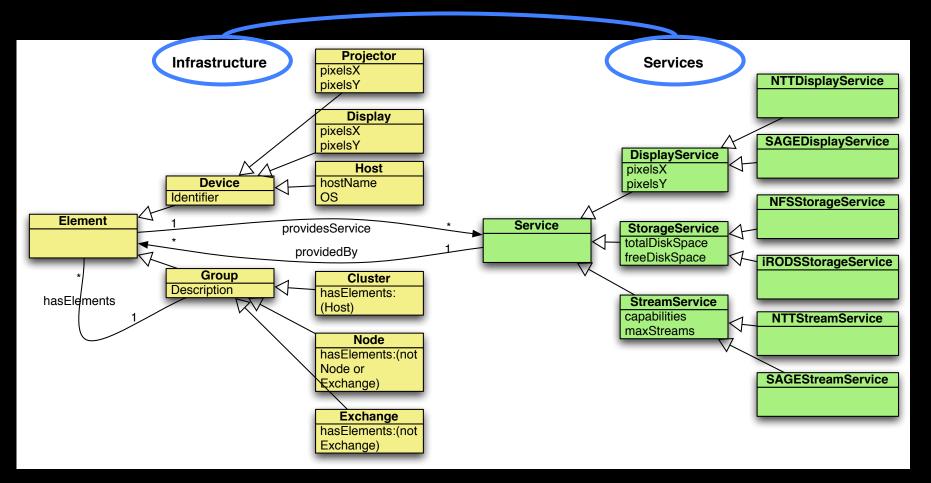

J. van der Ham, F. Dijkstra, P. Grosso, R. van der Pol, A. Toonk, C. de Laat *A distributed topology information system for optical networks based on the semantic web*, Elsevier Journal on Optical Switching and Networking, Volume 5, Issues 2-3, June 2008, Pages 85-93

R.Koning, P.Grosso and C.de Laat Using ontologies for resource description in the CineGrid Exchange In: Future Generation Computer Systems (2010)

CdL

Applications and Networks become aware of each other!


CineGrid Description Language


CineGrid is an initiative to facilitate the exchange, storage and display of high-quality digital media.


The CineGrid Description Language (CDL) describes CineGrid resources. Streaming, display and storage components are organized in a hierarchical way.

CDL has bindings to the NDL ontology that enables descriptions of network components and their interconnections.

With CDL we can reason on the CineGrid infrastructure and its services.








CDL links to NDL using the owl:SameAs property. CDL defines the services, NDL the network interfaces and links. The combination of the two ontologies identifies the host pairs that support matching services via existing network connections.



COMMIT/ Our connecting models

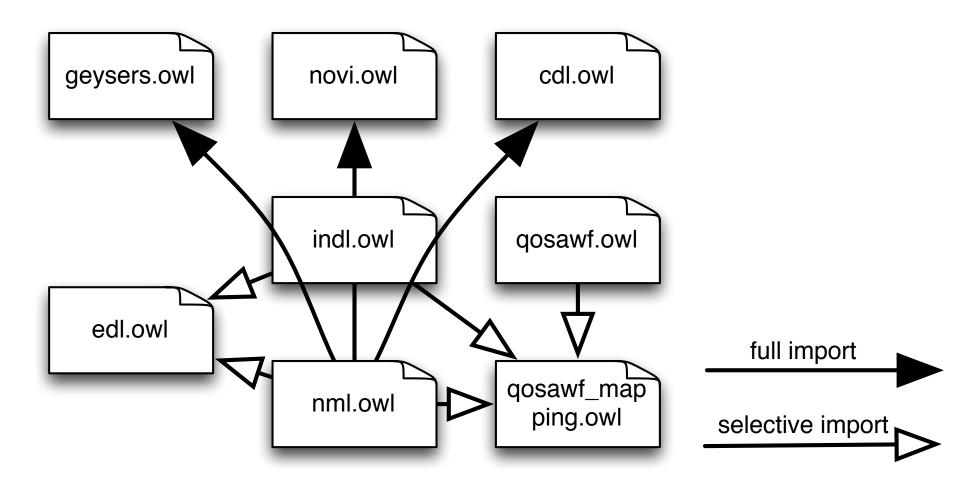

'RI




COMMIT/



NewQOSPlanner

The NSI – Network Service Interface – creates on the fly connections between domains.

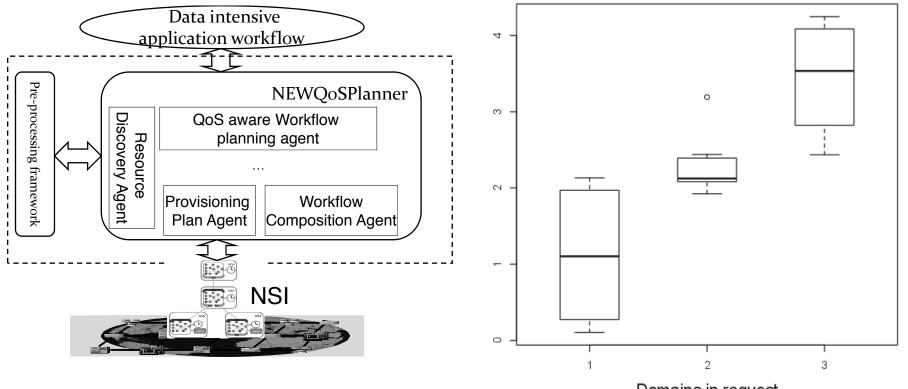

Domains in request




Z. Zhao, J. v/d Ham, A. Taal, R. Koning, P. Grosso and C. de Laat *Planning data intensive workflows on inter-domain resources using the Network Service Interface (NSI)* In: WORKS 2012

COMMIT/

HyperFlow



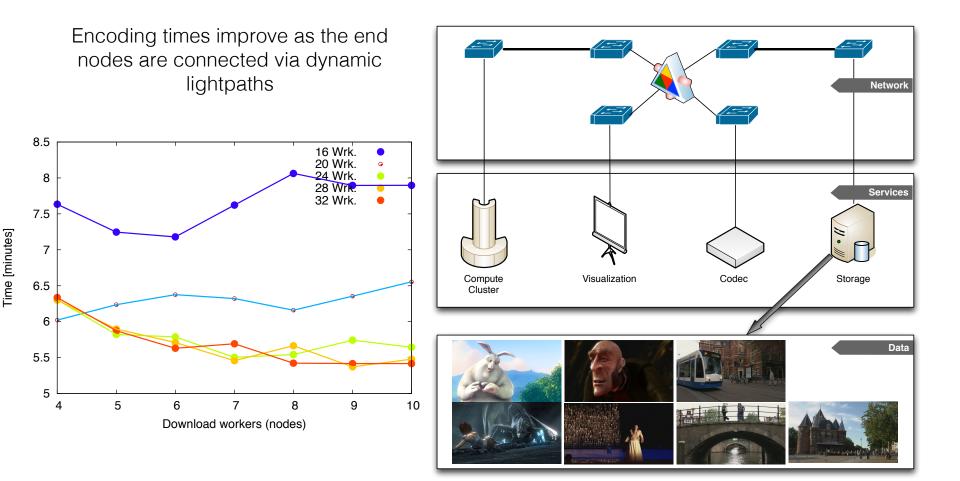



C. Dumitru, Z. Zhao, P. Grosso and C. de Laat *HybridFlow: Towards Intelligent Video Delivery and Processing Over Hybrid Infrastructures* (In CTS 2013))

Mission

Can we create smart and safe data processing infrastructures that can be tailored to diverse application needs?

- Capacity
- Bandwidth on demand, QoS, architectures deprice, permance
 Capability


 ograme
 ograme
 y, y = lizate i, couple.
 set
 nony y, teg y collar in distributed data processing
- Sustantility
 - Greening infrastructure, awareness
- Resilience
 - Systems under attack, failures, disasters





"Show Big Bug Bunny in 4K on my Tiled Display using green Infrastructure"

- Big Bugs Bunny can be on multiple servers on the Internet.
- Movie may need processing / recoding to get to 4K for Tiled Display.
- Needs deterministic Green infrastructure for Quality of Experience.
- Consumer / Scientist does not want to know the underlying details.
 → His refrigerator also just works!


TimeLine

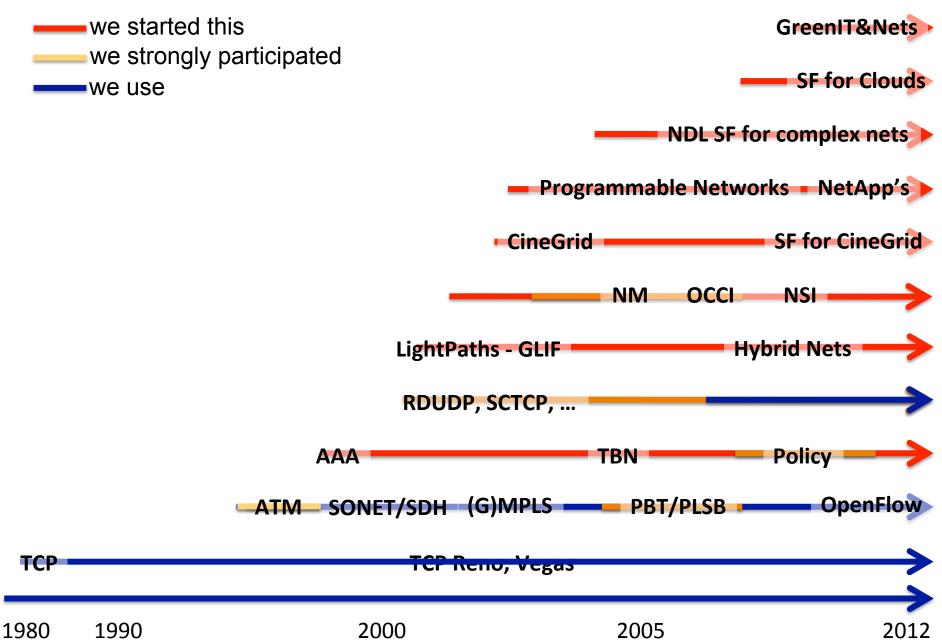

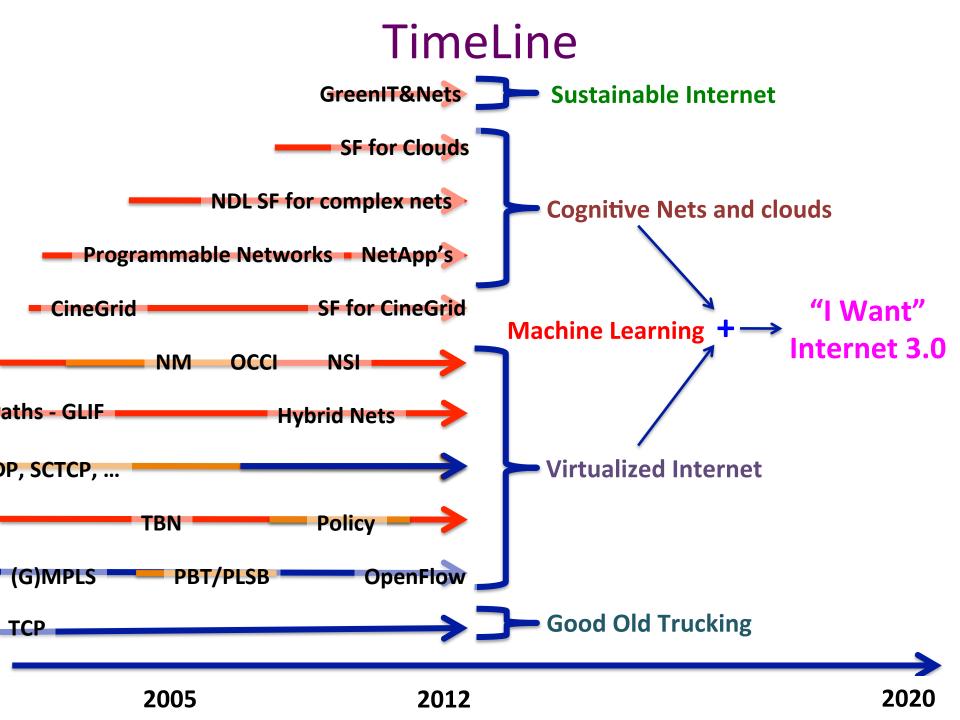

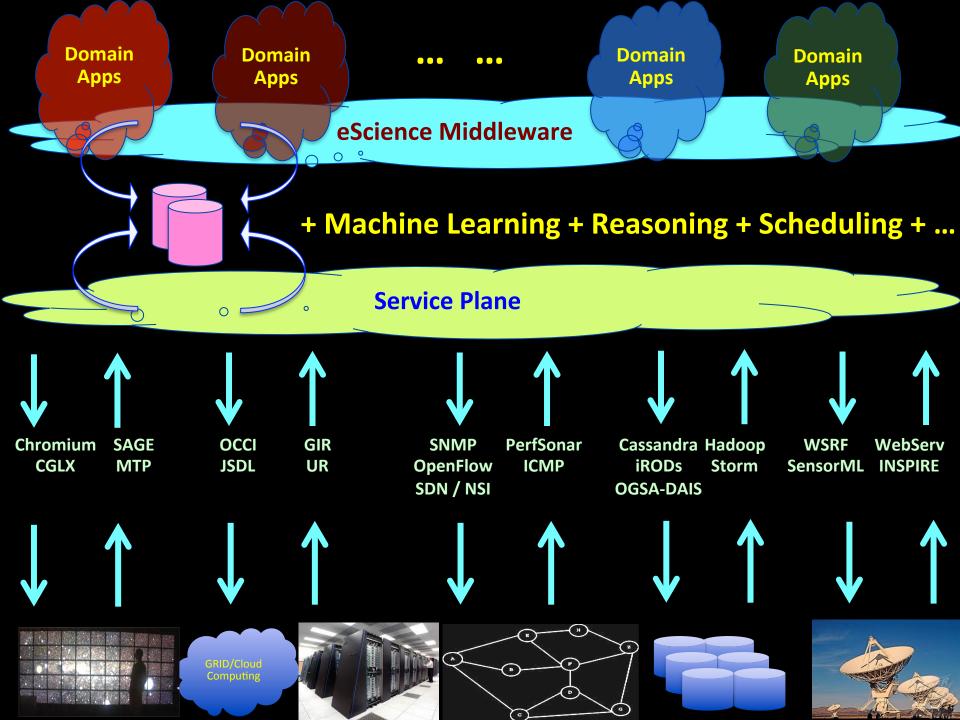

Layers

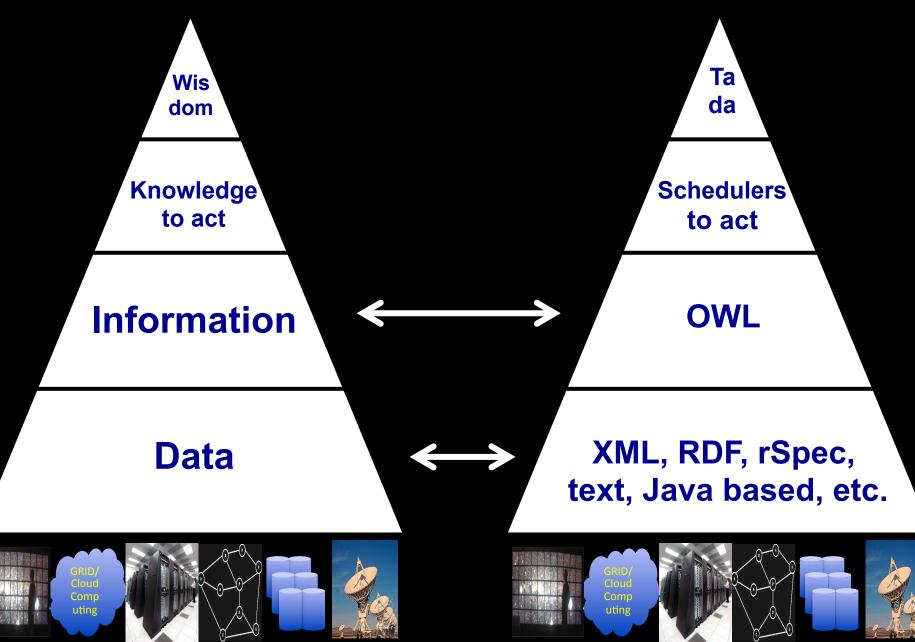


Mission

Can we create smart and safe data processing infrastructures that can be tailored to diverse application needs?

- Capacity
 - Bandwidth on demand, QoS, architectures, photonics, performance
- Capability
 - Programmability, virtualization, complexity, semantics, workflows
- Security
 - Anonymity, integrity of data in distributed data processing
- Sustainability
 - Greening infrastructure, awareness
- Resilience
 - Systems under attack, failures, disasters

Need for GreenIT

Global Average Temperature and Carbon Dioxide Concentrations, 1880 - 2004

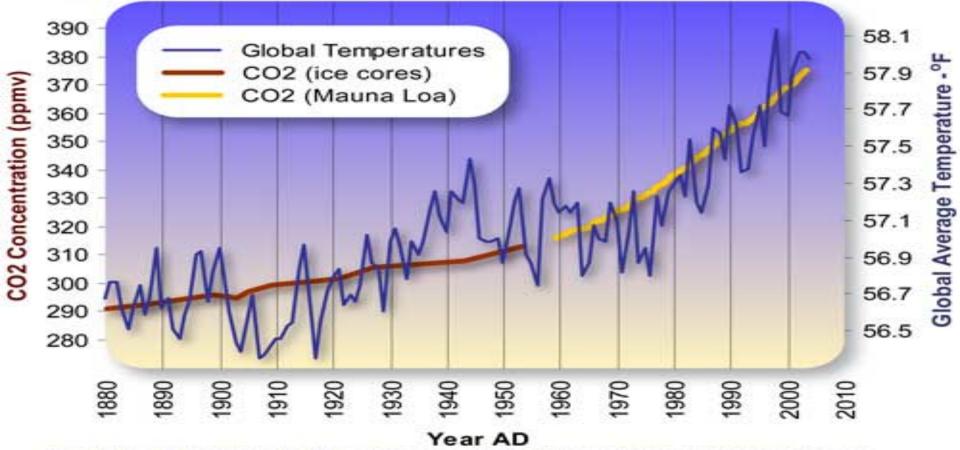

Data Source Temperature: ftp://ftp.ncdc.noaa.gov/pub/data/anomalies/annual_land.and.ocean.ts Data Source CO2 (Siple Ice Cores): http://cdiac.esd.ornl.gov/ftp/trends/co2/siple2.013 Data Source CO2 (Mauna Loa): http://cdiac.esd.ornl.gov/ftp/trends/co2/maunaloa.co2

Graphic Design: Michael Ernst, The Woods Hole Research Center

Greening the Processing

Positive proof of global warming.


18th Century 1900 1950 1970 1980 1990 2006

ECO-Scheduling




Green scheduling



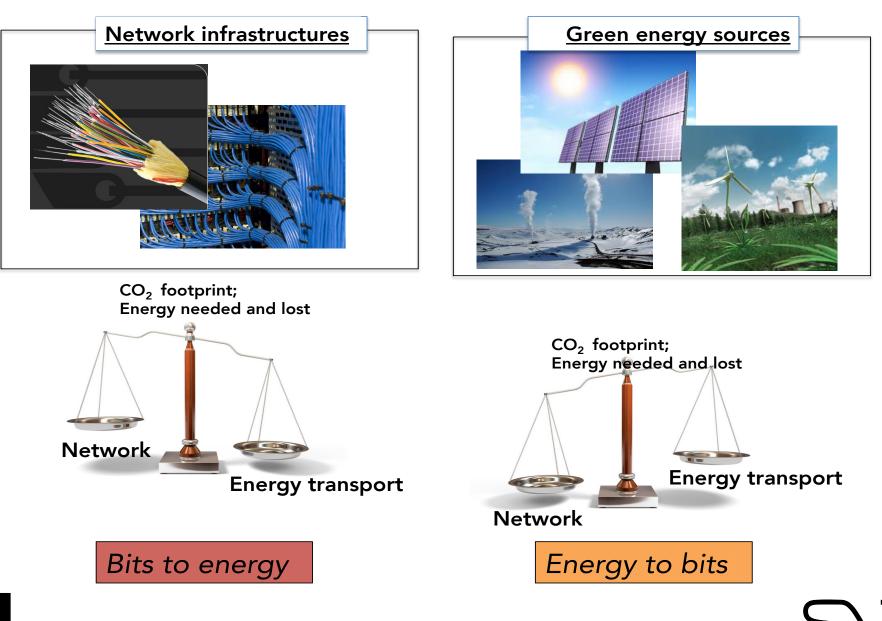



COMMIT/

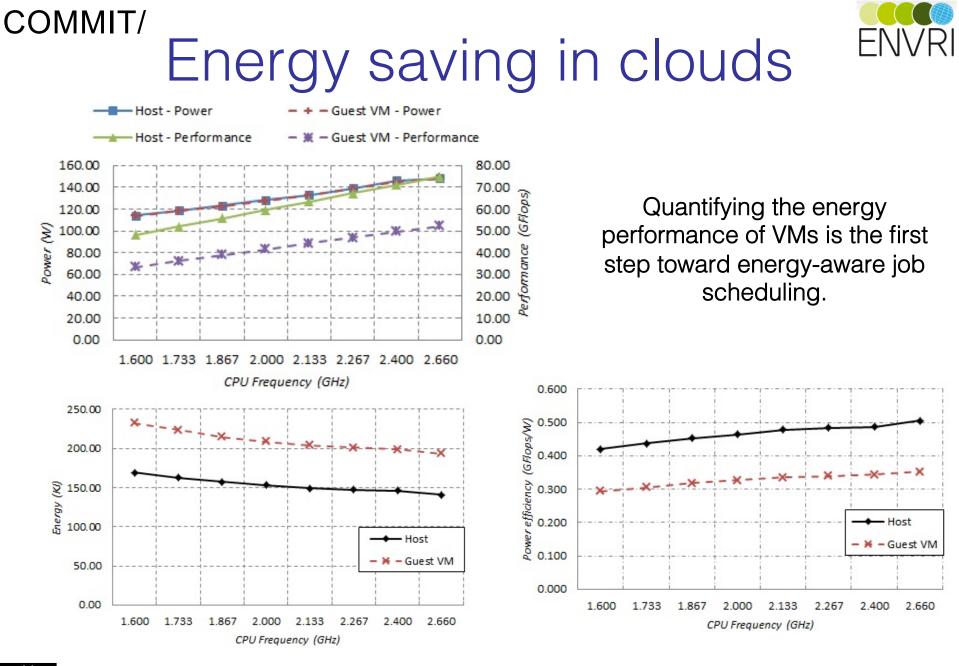

×X×


Q. Chen, P. Grosso, K. van der Veldt, C. de Laat, R. Hofman and H.Bal. *Profiling energy consumption of VMs for green cloud computing* In: International Conference on Cloud and Green Computing (CGC2011), Sydney December 2011


сомміт/ Energy Efficient Ethernet (802.3az)

23

22

Power savings techniques in hardware can be leveraged in architecturing communication patterns in data centra

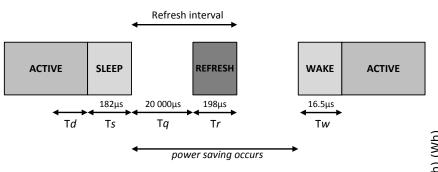

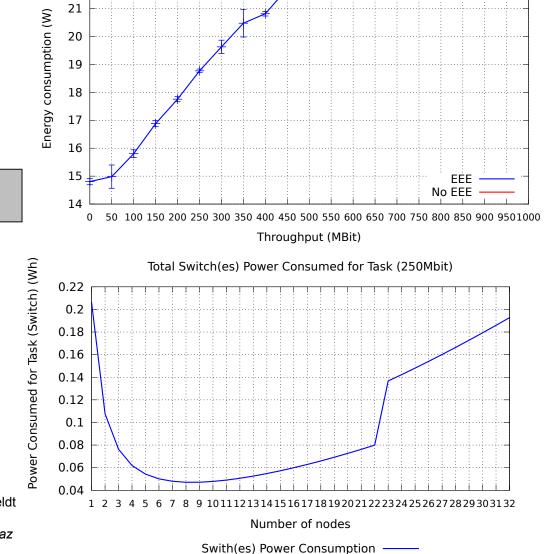


D. Pavlov and J. Soert and P. Grosso and Z. Zhao and K. van der Veldt and H. Zhu and C.de Laat *Towards energy efficient data intensive computing using IEEE 802.3az*

In: DISCS 2012 workshop - Nov 2012

Networks and CO2

- Take a network (Esnet, working on using SURFnet data)
- Define the traffic model running on it
- Use the energy monitoring information and energy costs data
- Compare path selection strategies : shortest, cheapest and greenest

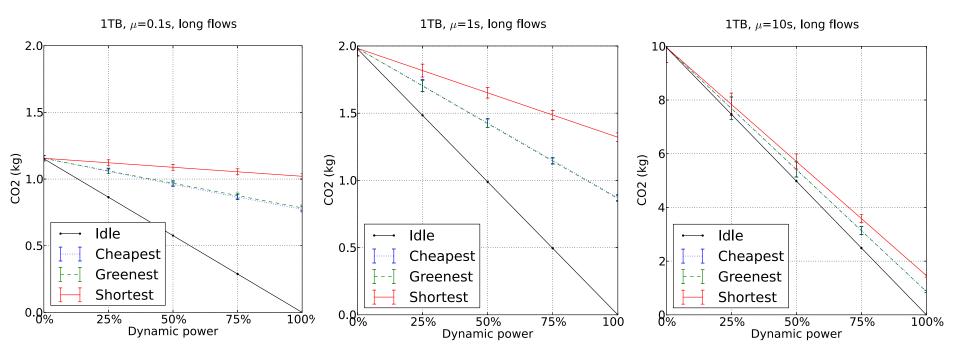

"A motivation for carbon aware path provisioning for NRENs" (submitted to eEnergy2014)



Why?



Because we can!

Questions?

http://delaat.net

http://sne.science.uva.nl

http://www.os3.nl/

http://i4dw.nl/

http://dsrc.nl/

http://sne.science.uva.nl/openlab/

http://pire.opensciencedatacloud.org

http://staff.science.uva.nl/~delaat/pire/

https://rd-alliance.org

http://envri.eu

SE

Arie Taal Ana Oprescu Cees de Laat kkesRalph Koning Leon Gommans Fahimeh **Cosmin Dumitr** Pieter Adriaans Rob MeijerKarel van der Veldt ri Demchen Reggie Cushing Jan Sipke van der Veen Miroslav Zivkovic Naod Duga Jebessa Sander Klous Jeroen van der Ham Jaap van Ginke Paul Klint Souley Madougou Ngo Tong Canh Adianto Wibisono Anna banescu Gerben de Vries Hans Dijkman Arno Bakker Marian Bubak Erik-Jan Bos **Peter Bloem**

Trip supported by:

